


Ribbon PRO



LED Strip | 800 topLED 84 W DC 24 V | 16.8 W/m
2419.6 Lm/m | CRI >90

82169

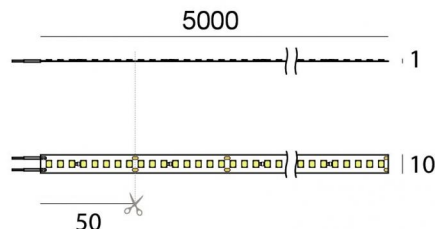


Technical data


Length	5000 mm
Minimum cut	50 mm
Type	LED Strip
Installation position	Wall lights - Ceiling
Installation environment	Indoor
Light Source	LED
Circuit structure	topLED
Optics	Diffused
Light emission direction	downward
Nominal power	84 W DC
Power / m	16.8 W / m
Source lumens	12098 lm
Source lumens / m	2419.6 lm / m
Input voltage range	24V
CCT / Tone	3000 K
Colour rendering index	>90 Ra
C.C. / C.V.	CV
Safety class	3
IP	IP20
Glow wire test	650°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	No
Dimmable article	DALI - 1-10V
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	0.3 m
Resin potting	No
Type of light emission	Single emission
Length	5000 mm
Net weight	0.09 Kg
Electrostatic discharge protection	No
Surge protection	No


Finishing casing


Colour white

Electronics

 99331
On/Off Driver 198~264V AC / 176~275V DC 150 W (1 art.)

 99332
1-10V Controller (1 art.)

 99374
On/Off Driver 198~264V AC / 176~275V DC 75 W

 83333
Push and Simply Dim - DALI-2 Controller

 C-E400002
Push and Simply Dim - DALI-2 Controller (1 - 2 art.)

Cables Electrification

Max cable length 300 mm



LED Strip | 800 topLED 84 W DC 24 V | 16.8 W/m | 2419.6 Lm/m | CRI >90 | Base
82169


Single emission led strip for indoor application. The warm white LED light source with a diffused light distribution is composed of 800 topLEDs with CCT of 3000 K and a CRI >90; the source luminous flux is 12098 lm, with a 144.0 lm/W nominal luminous efficacy.

The device body and features a white finish. The ingress protection degree is IP20; the total weight is of 0.09 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 84 W. The power supply cable is included and features a 0.3 m length.

The device features protection class III and can be wall lights or ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

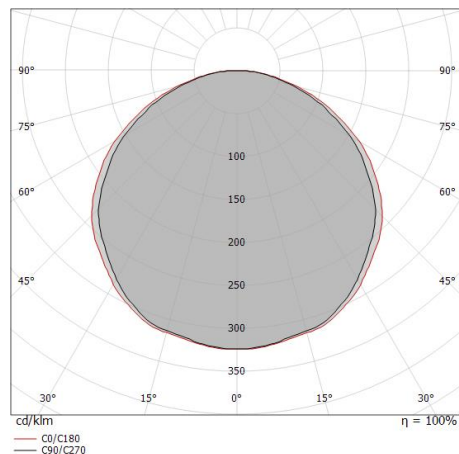

Distance [m]	Cone diameter [m]	illuminance [lx]
0.5	1.61 1.75	E(0°) 15695 E(C90) 58.2° 1151 E(C0) 60.3° 956
1.0	3.23 3.51	E(0°) 3924 E(C90) 58.2° 288 E(C0) 60.3° 239
1.5	4.84 5.26	E(0°) 1744 E(C90) 58.2° 128 E(C0) 60.3° 106
2.0	6.45 7.01	E(0°) 981 E(C90) 58.2° 72 E(C0) 60.3° 60
2.5	8.06 8.77	E(0°) 628 E(C90) 58.2° 46 E(C0) 60.3° 38
3.0	9.68 10.52	E(0°) 436 E(C90) 58.2° 32 E(C0) 60.3° 27

— C0/C180 (Half-peak divergence: 120.6°)
— C90/C270 (Half-peak divergence: 116.4°)

Energy efficiency class

This product contains a light source of energy efficiency class E.



Illuminotechnical Features

Light Output Ratio (LOR)	100 %
Source lumens	12098 lm
Delivered lumens	12098 lm
Consumption	84 W
Luminaire efficacy	144 lm/W
Colour temperature	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Standard Operating Ambient Temperature	-20 / +55°C

UGR

UGR axial	31.9
UGR transversal	32.3
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL

C90/C270 optics	116°
C0/C180 optics	121°
Light distribution symmetry	Symmetrical 2 axis








Ribbon PRO



LED Strip | 800 topLED 84 W DC 24 V | 16.8 W/m | 2419.6 Lm/m | CRI >90

82169

Components

		LUNO_20/27 - Profili Modular	Code <u>C-K100017</u>
		LUNO_20/27	Code <u>C-K100018</u>
		Rive_17/16 - Profili Modular	Code <u>C-K100015</u>
		Rive_17/16 - Profili Modular	Code <u>C-K100016</u>
		Cela_18/18 - Profili Modular	Code <u>C-K100019</u>
		Cela_18/18 - Profili Modular	Code <u>C-K100020</u>
		Tabulo_35/14 - Profili Modular	Code <u>C-K100025</u>
		Fylo+ Recessed_2	Code <u>65006 - 65007</u>


Ribbon PRO



LED Strip | 800 topLED 84 W DC 24 V | 16.8 W/m | 2419.6 Lm/m | CRI >90

82169


Components



Fylo+ Recessed_5

Code


65012 - 65013



Fylo+ Recessed_1

Code

65027 - 65028



Fylo+ Recessed_4

Code


65009 - 65010



Fylo+ Surface_1

Code


65015 - 65016



Fylo+ Surface_2

Code

65018 - 65019



Fylo+ Surface_3

Code

65021 - 65022



Fylo+ Surface_4

Code

65024 - 65025



Fylo+ Recessed_3

Code

65004 - 65003



LED Strip | 800 topLED 84 W DC 24 V | 16.8 W/m | 2419.6 Lm/m | CRI >90

82169

Components



















Fylo+ Direct_1

















Code

65180 - 65181



 <p>5x</p>	 <p>25 30 6,8</p>	<p>Springs for recessing - 5 pieces</p>	<p>Code 98420</p>
	 <p>2,5 18 2000</p>	<p>Diffuser Diffuser Type: opaline diffuser. Material:PC, colour:opaline.</p>	<p>Finish Opaline Code 98395</p>
	 <p>15 2000</p>	<p>Diffuser</p>	<p>Code 98941</p>
	 <p>15 2000</p>	<p>Diffuser</p>	<p>Code 98942</p>
	 <p>15 2000</p>	<p>Diffuser - Opaline Diffuser</p>	<p>Code 98943</p>
	 <p>24 2000</p>	<p>Diffuser</p>	<p>Code 98898</p>
	 <p>24 2000</p>	<p>Diffuser</p>	<p>Code 98899</p>
	 <p>24 2000</p>	<p>Diffuser</p>	<p>Code 98900</p>



		Diffuser		Code 98917
		Diffuser		Code 98925
		Diffuser Material:PC, colour:black.	Finish Black	Code 83132
		Diffuser Material:PC, colour:opaline.	Finish Opaline	Code C-K200001
		Diffuser Material:PC, colour:black.	Finish Black	Code C-K200002
		Diffuser Material:PC, colour:opaline.	Finish Opaline	Code C-K200003
		Diffuser Material:PC, colour:black.	Finish Black	Code C-K200004
		Diffuser Material:PC, colour:opaline.	Finish Opaline	Code C-K200005



	<p>Diffuser Material:PC, colour:opaline.</p>	<table border="1"> <thead> <tr> <th>Finish</th> <th>Code</th> </tr> </thead> <tbody> <tr> <td>Opaline</td> <td>C-K200007</td> </tr> </tbody> </table>	Finish	Code	Opaline	C-K200007
Finish	Code					
Opaline	C-K200007					

	<p>Diffuser Material:PC, colour:black.</p>	<table border="1"> <thead> <tr> <th>Finish</th> <th>Code</th> </tr> </thead> <tbody> <tr> <td>Black</td> <td>C-K200009</td> </tr> </tbody> </table>	Finish	Code	Black	C-K200009
Finish	Code					
Black	C-K200009					

	<p>Closing cap</p>	<table border="1"> <thead> <tr> <th>Code</th> </tr> </thead> <tbody> <tr> <td>98418</td> </tr> </tbody> </table>	Code	98418
Code				
98418				

	<p>Closing cap - Closing cap Material:PC, colour:white.</p>	<table border="1"> <thead> <tr> <th>Code</th> </tr> </thead> <tbody> <tr> <td>98892</td> </tr> </tbody> </table>	Code	98892
Code				
98892				

	<p>Closing cap</p>	<table border="1"> <thead> <tr> <th>Code</th> </tr> </thead> <tbody> <tr> <td>98928</td> </tr> </tbody> </table>	Code	98928
Code				
98928				

	<p>Closing cap</p>	<table border="1"> <thead> <tr> <th>Code</th> </tr> </thead> <tbody> <tr> <td>98896</td> </tr> </tbody> </table>	Code	98896
Code				
98896				

	<p>Closing cap</p>	<table border="1"> <thead> <tr> <th>Code</th> </tr> </thead> <tbody> <tr> <td>98902</td> </tr> </tbody> </table>	Code	98902
Code				
98902				

	<p>Closing cap Material:Aluminium, colour:translucent.</p>	<table border="1"> <thead> <tr> <th>Code</th> </tr> </thead> <tbody> <tr> <td>98907</td> </tr> </tbody> </table>	Code	98907
Code				
98907				




		<p>Closing cap Material:PC, colour:white.</p>	<p>Code <u>98922</u></p>
		<p>Closing cap Material:PC, colour:white.</p>	<p>Code <u>98918</u></p>
		<p>Closing cap Material:PC, colour:black.</p>	<p>Code <u>83133</u></p>
		<p>Closing cap Material:plastic, colour:grey.</p>	<p>Code <u>C-V400023</u></p>
		<p>Closing cap Material:plastic, colour:grey.</p>	<p>Code <u>C-V400019</u></p>
		<p>Closing cap Material:ABS Plastic, colour:black.</p>	<p>Code <u>C-V400020</u></p>
		<p>Closing cap Material:plastic, colour:grey.</p>	<p>Code <u>C-V400021</u></p>
		<p>Closing cap Material:ABS Plastic, colour:black.</p>	<p>Code <u>C-V400022</u></p>



		<p>Closing cap Material:plastic, colour:grey.</p>	<p>Code <u>C-V400025</u></p>
		<p>Closing cap Material:plastic, colour:grey.</p>	<p>Code <u>C-V400027</u></p>
		<p>Closing cap Material:plastic, colour:grey.</p>	<p>Code <u>C-V400029</u></p>
		<p>Closing cap Material:plastic, colour:grey.</p>	<p>Code <u>C-V400031</u></p>
		<p>Closing cap Material:plastic, colour:grey.</p>	<p>Code <u>C-V400033</u></p>
		<p>Closing cap Material:plastic, colour:grey.</p>	<p>Code <u>C-V400035</u></p>
		<p>Closing cap Material:ABS Plastic, colour:black.</p>	<p>Code <u>C-V400036</u></p>
		<p>Closing cap Material:ABS Plastic, colour:black.</p>	<p>Code <u>C-V400038</u></p>



		<p>Closing cap Material:plastic, colour:grey.</p>	<p>Code C-V400037</p>
		<p>Closing cap Material:plastic, colour:grey.</p>	<p>Code C-V400041</p>
		<p>Bracket - Mounting bracket L=19mm, H=8mm, D=9mm. Material:Iron, colour:zinc, processing:Washing.</p>	<p>Code 98944</p>
		<p>Bracket L=9mm, H=8.8mm, D=21.8mm. Material:Iron, colour:translucent, processing:Washing.</p>	<p>Code 98931</p>
		<p>Bracket L=22mm, H=21.5mm, D=16.4mm. Material:PC, colour:transparent.</p>	<p>Finish Transp.</p> <p>Code 98904</p>
		<p>Bracket L=12mm, H=15mm, D=30mm. Material:PC, colour:white.</p>	<p>Finish White</p> <p>Code 98901</p>
		<p>Profile - Wall integrated side profile Material:Aluminium 6060, colour:Anodised Aluminum, processing:20 µm anodizing.</p>	<p>Code 98921</p>
		<p>Connector - Fast connector for Ribbon Plus 10mm - Ribbon PRO - Ribbon PRO 48V Length 21,6 mm.</p>	<p>Code 83398</p>




Connector
Length 15,4 mm.

Code
83399



Optics
Light distribution: medium flood,Cover material: pc

Code
C-U100001




Bag / Fixing kit

Code
C-K100027



Bag / Fixing kit

Code
C-K100028



Bag / Fixing kit

Code
C-K100029