




LED Strip | 350 topLED 24 W DC 24 V | 4.8 W/m
550 Lm/m | CRI >90

82174



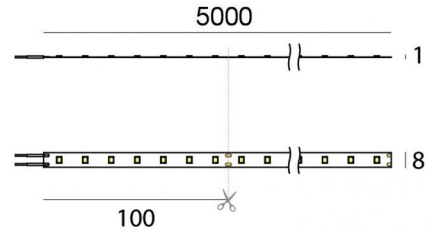

Technical data	
Length	5000 mm
Minimum cut	100 mm
Installation position	Wall lights - Ceiling
Installation environment	Indoor
Light Source	LED
Circuit structure	topLED
Optics	Diffused
Light emission direction	internal
Nominal power	24 W DC
Source lumens	2750 lm
Input voltage range	24V
CCT / Tone	2700 K
Colour rendering index	>90 Ra
C.C. / C.V.	CV
Safety class	3
IP	IP20
Glow wire test	650°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	No
Dimmable article	DALI - 1-10V
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	0.3 m
Resin potting	No
Type of light emission	Single emission
Length	5000 mm
Net weight	0.09 Kg
Electrostatic discharge protection	No
Surge protection	No


Finishing casing


Colour	white
--------	-------

Electronics

	99331 On/Off Driver 198~264V AC / 176~275V DC 150 W (1 art.)
---	---

	99332 1-10V Controller (1 - 6 art.)
---	--

	99374 On/Off Driver 198~264V AC / 176~275V DC 75 W (1 - 3 art.)
---	--

	83333 Push and Simply Dim - DALI-2 Controller (1 - 6 art.)
---	---

	C-E400002 Push and Simply Dim - DALI-2 Controller (1 - 10 art.)
---	--

Cables Electrification

Max cable length	300 mm
------------------	--------



LED Strip | 350 topLED 24 W DC 24 V | 4.8 W/m | 550 Lm/m | CRI >90 | Base 82174

Single emission led strip for indoor application. The super warm white LED light source with a diffused light distribution is composed of 350 topped LEDs with CCT of 2700 K and a CRI >90; the source luminous flux is 2750 lm, with a 114.6 lm/W nominal luminous efficacy.

The device body and features a white finish. The ingress protection degree is IP20; the total weight is of 0.09 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 24 W. The power supply cable is included and features a 0.3 m length.

The device features protection class III and can be wall lights or ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Energy efficiency class

This product contains a light source of energy efficiency class F.



Illuminotechnical Features


Light Output Ratio (LOR)	100 %
Source lumens	2750 lm
Delivered lumens	2750 lm
Consumption	24 W
Luminaire efficacy	114 lm/W
Colour temperature	2700 K
Standard Deviation of Colour Matching	3 Step MacAdam
Standard Operating Ambient Temperature	-20 / +45°C

UGR

UGR axial	26.7
UGR transversal	27.1
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL

C90/C270 optics	116°
C0/C180 optics	120°
Light distribution symmetry	Symmetrical 2 axis

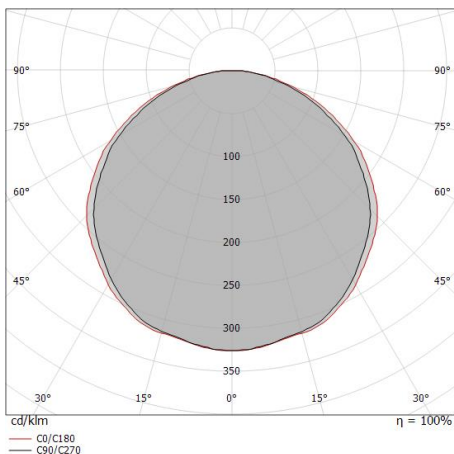

Distance [m]	Cone diameter [m]	illuminance [lx]
0.5	1.61 1.75	E(0°) 3589 E(C90) 265 E(C0) 221
1.0	3.21 3.49	E(0°) 897 E(C90) 66 E(C0) 55
1.5	4.82 5.24	E(0°) 399 E(C90) 29 E(C0) 25
2.0	6.43 6.98	E(0°) 224 E(C90) 17 E(C0) 14
2.5	8.03 8.73	E(0°) 144 E(C90) 11 E(C0) 9
3.0	9.64 10.48	E(0°) 100 E(C90) 7 E(C0) 6

— C0/C180 (Half-peak divergence: 120.4°)
— C90/C270 (Half-peak divergence: 116.2°)




Ribbon Plus



LED Strip | 350 topLED 24 W DC 24 V | 4.8 W/m | 550 Lm/m | CRI >90

82174

Components


		LUNO_20/27 - Profili Modular	Code <u>C-K100017</u>
		LUNO_20/27	Code <u>C-K100018</u>
		Rive_17/16 - Profili Modular	Code <u>C-K100015</u>
		Rive_17/16 - Profili Modular	Code <u>C-K100016</u>
		Cela_18/18 - Profili Modular	Code <u>C-K100019</u>
		Cela_18/18 - Profili Modular	Code <u>C-K100020</u>
		Tabulo_35/14 - Profili Modular	Code <u>C-K100025</u>
		Fylo+ Recessed_2	Code <u>65006 - 65007</u>



LED Strip | 350 topLED 24 W DC 24 V | 4.8 W/m | 550 Lm/m | CRI >90

82174



Components



Fylo+ Recessed_1

Code



65027 - 65028



Fylo+ Recessed_4

Code

65009 - 65010



Fylo+ Recessed_5

Code


65012 - 65013



Fylo+ Surface_1

Code


65015 - 65016



Fylo+ Surface_2

Code

65018 - 65019



Fylo+ Surface_3

Code

65021 - 65022



Fylo+ Surface_4

Code

65024 - 65025



Fylo+ Recessed_3

Code

65004 - 65003



LED Strip | 350 topLED 24 W DC 24 V | 4.8 W/m | 550 Lm/m | CRI >90
82174

Components



















Fylo+ Direct_1

















Code

65180 - 65181



 <p>5x</p>	 <p>25 30 6,8</p>	<p>Springs for recessing - 5 pieces</p>	<p>Code 98420</p>
	 <p>2,5 18 2000</p>	<p>Diffuser Diffuser Type: opaline diffuser. Material:PC, colour:opaline.</p>	<p>Finish Opaline Code 98395</p>
	 <p>15 2000</p>	<p>Diffuser</p>	<p>Code 98941</p>
	 <p>15 2000</p>	<p>Diffuser</p>	<p>Code 98942</p>
	 <p>15 2000</p>	<p>Diffuser - Opaline Diffuser</p>	<p>Code 98943</p>
	 <p>24 2000</p>	<p>Diffuser</p>	<p>Code 98898</p>
	 <p>24 2000</p>	<p>Diffuser</p>	<p>Code 98899</p>
	 <p>24 2000</p>	<p>Diffuser</p>	<p>Code 98900</p>



		Diffuser		Code 98917
		Diffuser		Code 98925
		Diffuser Material:PC, colour:black.	Finish Black	Code 83132
		Diffuser Material:PC, colour:opaline.	Finish Opaline	Code C-K200001
		Diffuser Material:PC, colour:black.	Finish Black	Code C-K200002
		Diffuser Material:PC, colour:opaline.	Finish Opaline	Code C-K200003
		Diffuser Material:PC, colour:black.	Finish Black	Code C-K200004
		Diffuser Material:PC, colour:opaline.	Finish Opaline	Code C-K200005




Diffuser
Material:PC, colour:opaline.

Finish
Opaline **Code**
C-K200007




Diffuser
Material:PC, colour:black.

Finish
Black **Code**
C-K200009




Closing cap

Code
98418




Closing cap - Closing cap
Material:PC, colour:white.

Code
98892



Closing cap

Code
98928



Closing cap

Code
98896



Closing cap

Code
98902



Closing cap
Material:Aluminium, colour:translucent.

Code
98907



		<p>Closing cap Material:PC, colour:white.</p>	<p>Code <u>98922</u></p>
		<p>Closing cap Material:PC, colour:white.</p>	<p>Code <u>98918</u></p>
		<p>Closing cap Material:PC, colour:black.</p>	<p>Code <u>83133</u></p>
		<p>Closing cap Material:plastic, colour:grey.</p>	<p>Code <u>C-V400023</u></p>
		<p>Closing cap Material:plastic, colour:grey.</p>	<p>Code <u>C-V400019</u></p>
		<p>Closing cap Material:ABS Plastic, colour:black.</p>	<p>Code <u>C-V400020</u></p>
		<p>Closing cap Material:plastic, colour:grey.</p>	<p>Code <u>C-V400021</u></p>
		<p>Closing cap Material:ABS Plastic, colour:black.</p>	<p>Code <u>C-V400022</u></p>



		<p>Closing cap Material:plastic, colour:grey.</p>	<p>Code <u>C-V400025</u></p>
		<p>Closing cap Material:plastic, colour:grey.</p>	<p>Code <u>C-V400027</u></p>
		<p>Closing cap Material:plastic, colour:grey.</p>	<p>Code <u>C-V400029</u></p>
		<p>Closing cap Material:plastic, colour:grey.</p>	<p>Code <u>C-V400031</u></p>
		<p>Closing cap Material:plastic, colour:grey.</p>	<p>Code <u>C-V400033</u></p>
		<p>Closing cap Material:plastic, colour:grey.</p>	<p>Code <u>C-V400035</u></p>
		<p>Closing cap Material:ABS Plastic, colour:black.</p>	<p>Code <u>C-V400036</u></p>
		<p>Closing cap Material:ABS Plastic, colour:black.</p>	<p>Code <u>C-V400038</u></p>



		<p>Closing cap Material:plastic, colour:grey.</p>	<p>Code C-V400037</p>
		<p>Closing cap Material:plastic, colour:grey.</p>	<p>Code C-V400041</p>
		<p>Bracket - Mounting bracket L=19mm, H=8mm, D=9mm. Material:Iron, colour:zinc, processing:Washing.</p>	<p>Code 98944</p>
		<p>Bracket L=9mm, H=8.8mm, D=21.8mm. Material:Iron, colour:translucent, processing:Washing.</p>	<p>Code 98931</p>
		<p>Bracket L=22mm, H=21.5mm, D=16.4mm. Material:PC, colour:transparent.</p>	<p>Finish Transp.</p> <p>Code 98904</p>
		<p>Bracket L=12mm, H=15mm, D=30mm. Material:PC, colour:white.</p>	<p>Finish White</p> <p>Code 98901</p>
		<p>Profile - Wall integrated side profile Material:Aluminium 6060, colour:Anodised Aluminum, processing:20 µm anodizing.</p>	<p>Code 98921</p>
		<p>Connector - Fast connector for Ribbon Basic V2 8mm, Ribbon HD 8mm (not Ribbon COB) Length 21,6 mm.</p>	<p>Code 83396</p>



	<p>Connector - Fast connector for Ribbon Basic V2 8mm, Ribbon HD 8mm (not Ribbon COB) Length 15,4 mm.</p>	<p>Code <u>83397</u></p>
	<p>Optics Light distribution: medium flood,Cover material: pc</p>	<p>Code <u>C-U100001</u></p>
	<p>Bag / Fixing kit</p>	<p>Code <u>C-K100027</u></p>
	<p>Bag / Fixing kit</p>	<p>Code <u>C-K100028</u></p>
	<p>Bag / Fixing kit</p>	<p>Code <u>C-K100029</u></p>