


Suelo_Brass



Uplights | arrayLED 0 W DC - 9 W AC | CRI 80
82267N60

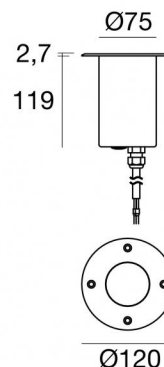

Technical data	
Type	Drive Over
Installation position	Floor
Installation environment	Outdoor
Light Source	LED
Circuit structure	arrayLED
Optics	Medium Wide Flood
Light emission direction	upward
Nominal power	0 W DC
Total Power	9 W
Nominal input voltage	220 - 240 V AC
Input voltage range	198 - 264 V AC
CCT / Tone	4000 K
Colour rendering index	80 Ra
C.C. / C.V.	AC
Safety class	1
IP	IP68
Installation limitations	Not for underwater use
IK	IK09
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	Driver
Dimmable article	No
Directional	No
Tilting	No
Walk-over	Yes
Drive-over	2000 Kg
Cable included	Yes
Cable length	1 m
Resin potting	Yes
Type of light emission	Single emission
Net weight	2.5 Kg
Electrostatic discharge protection	Yes
Surge protection	4 KV
Product technological characteristics	Acquastop

Finishing casing	
Material	OT58 brass
Colour	Raw Brass
Finishing diffuser	
Material	Extra clear glass - Tempered
Colour	transparent
Finishing flange	
Material	OT58 brass
Colour	Raw Brass
Cables Electrification	
Cable connector	No



Suelo_Brass | Uplights | Accessories
82267N60



Outer casing
installation position: floor, land; type of installation: masonry L=220mm, H=110mm,
D=110mm.
Material:ABS Plastic, colour:black.

Code

84900