




Lines | x powerLEDs 0 W DC - 13.5 W AC | CRI 80
82303N25

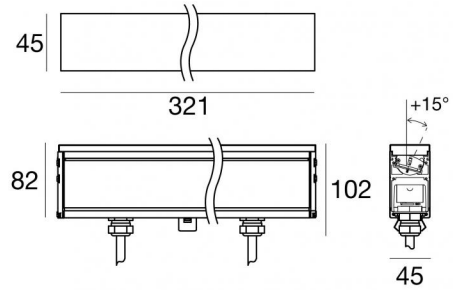

Technical data	
Type	Frameless
Installation position	Floor
Installation environment	Outdoor
Light Source	LED
Circuit structure	powerLEDs
Optics	Elliptical
Light emission direction	upward
Nominal power	0 W DC
Total Power	13.5 W
Nominal input voltage	220 - 240 V AC
Input voltage range	220 - 240 V AC
CCT / Tone	4000 K
Colour rendering index	80 Ra
C.C. / C.V.	AC
Safety class	1
IP	IP67
IK	IK10
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	Driver
Dimmable article	DALI
Directional	No
Tilting	Yes
total angle (horizontal plane)	15 °
total angle (vertical plane)	0 °
Walk-over	Yes
Drive-over	5000 Kg
Cable included	Yes
Cable length	0.2 m
Resin potting	No
Type of light emission	Single emission
Net weight	1.5 Kg
Electrostatic discharge protection	4 KV
Surge protection	6 KV
Product technological characteristics	Acquastop - TVS

Finishing casing

Material	Aluminium 6060
Colour	Anodised Black
Processing	15 µm Anodizing

Finishing diffuser

Material	Extra clear glass - Tempered
Colour	transparent
Processing	Silk-screening

Cables Electrification+signal

IP (locked condition)	68
Cable connector	Male Plug 5 Pin
Cable connector	Female Socket 5 Pin



		<p>Outer casing installation position: floor; type of installation: masonry L=320mm, H=140mm, D=75mm Material:Aluminium 6060, colour:Anodised Black, processing:15 µm Anodizing.</p>	<p>Finish </p>	<p>Code <u>98724</u></p>
		<p>Cable and connector Length 5000 mm.</p>		<p>Code <u>99822</u></p>
		<p>Cable and connector Length 1000 mm.</p>		<p>Code <u>99823</u></p>
		<p>Cable and connector Length 5000 mm.</p>		<p>Code <u>99824</u></p>
		<p>Cable and connector Length 10000 mm.</p>		<p>Code <u>99825</u></p>
		<p>Cable and connector Length 1000 mm.</p>		<p>Code <u>99826</u></p>