





Lines | 198-264 V | 9 x powerLED 19.8 W DC - 22 W AC | CRI 80 | Base  
82304N27

Single emission lines for outdoor application. The natural white LED light source with a asymmetric wallwasher light distribution is composed of 9 powerled LEDs with CCT of 4000 K and a CRI 80; the source luminous flux is 2898 lm, with a 146.4 lm/W nominal luminous efficacy.

The device body is made of aluminium 6060 and features a anodised black finish, processed by means of 15 µm anodizing; the diffuser is made of extra clear glass - tempered with a silk-screening treatment. The ingress protection degree is IP67; the total weight is of 2.8 kg.

The total absorbed power is 22 W. The power supply cable is included and features a 0.2 m length.

The device features protection class I and can be floor-mounted with an outer casing, code 98725(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

### Energy efficiency class

This product contains 2 light sources of energy efficiency class D.


### Illuminotechnical Features

Light Output Ratio (LOR)	65 %
Source lumens	2898 lm
Delivered lumens	1894 lm
Consumption	22 W
Luminaire efficacy	86 lm/W
Colour temperature	4000 K
Standard Deviation of Colour Matching	1.5 Step
Colour rendering index	80 Ra

Standard Operating Ambient Temperature	-20 / +50°C
Ordinary temperature on the glass	40°C

### LED Life / Failure Ratio

L70 B10 C0 361980h (at Tj 60 Ta 25 )

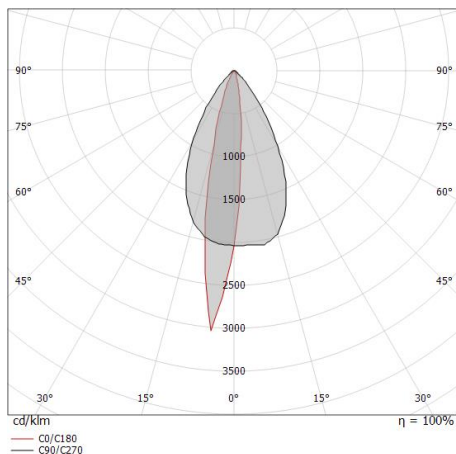



	<p>Cable and connector Length 2000 mm; insulation double; section 1.5 mm<sup>2</sup>; cable gland: no; external diameter: 9.5 mm; colors: blue - brown - yellow-green.</p>	<p><b>Code</b> <u>99057</u></p>	
	<p>Cable and connector Length 5000 mm; insulation double; section 1.5 mm<sup>2</sup>; cable gland: no; external diameter: 9.5 mm; colors: blue - brown - yellow-green.</p>	<p><b>Code</b> <u>98147</u></p>	
		<p>Cable and connector Length 10000 mm; insulation double; section 1.5 mm<sup>2</sup>; cable gland: no; external diameter: 9.5 mm; colors: blue - brown - yellow-green.</p>	<p><b>Code</b> <u>98146</u></p>
		<p>Outer casing installation position: floor; type of installation: masonry L=511mm, H=140mm, D=75mm. Material:Aluminium 6060, colour:Anodised Black, processing:15 µm Anodizing.</p>	<p><b>Finish</b> [Black swatch] <b>Code</b> <u>98725</u></p>
	<p>Key</p>	<p><b>Code</b> <u>98957</u></p>	