




Lines | 198-264 V  
6 x powerLED 13.2 W DC - 14.5 W AC | CRI 80  
**82308M27**

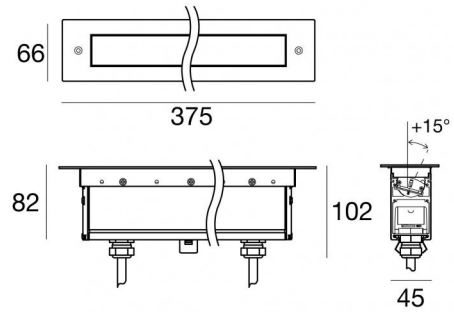

Technical data	
Type	Frame
Installation position	Floor
Installation environment	Outdoor
Light Source	LED
Circuit structure	powerLED
Optics	Asymmetric Wallwasher
Light emission direction	upward
Nominal power	13.2 W DC
Total Power	14.5 W
Source lumens	1692 lm
Nominal input voltage	220 - 240 V AC
Input voltage range	198 - 264 V AC
Frequency	50 - 60 Hz
CCT / Tone	2700 K
Colour rendering index	80 Ra
C.C. / C.V.	AC
Safety class	1
IP	IP67
IK	IK10
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	Driver
Dimmable article	No
Directional	No
Tilting	Yes
total angle (horizontal plane)	15 °
total angle (vertical plane)	0 °
Walk-over	Yes
Drive-over	No
Cable included	Yes
Cable length	0.2 m
Resin potting	No
Type of light emission	Single emission
Net weight	1.5 Kg
Electrostatic discharge protection	4 KV
Surge protection	6 KV

### Finishing casing

Material	Aluminium 6060
Colour	Anodised Black
Processing	15 µm Anodizing

### Finishing diffuser

Material	Extra clear glass - Tempered
Colour	transparent
Processing	Silk-screening

### Finishing flange

Material	AISI 316 steel
Colour	steel
Processing	Brushing

Lines | 198-264 V | 6 x powerLED 13.2 W DC - 14.5 W AC | CRI 80 | Base  
**82308M27**

Single emission lines for outdoor application. The super warm white LED light source with a asymmetric wallwasher light distribution is composed of 6 powered LEDs with CCT of 2700 K and a CRI 80; the source luminous flux is 1692 lm, with a 128.2 lm/W nominal luminous efficacy.

The device body is made of aluminium 6060 and features a anodised black finish, processed by means of 15 µm anodizing; the diffuser is made of extra clear glass - tempered with a silk-screening treatment. The ingress protection degree is IP67; the total weight is of 1.5 kg.

The total absorbed power is 14.5 W. The power supply cable is included and features a 0.2 m length.

The device features protection class I and can be floor-mounted with an outer casing, code 98671 (for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

### Energy efficiency class

This product contains a light source of energy efficiency class D.


### Illuminotechnical Features

Light Output Ratio (LOR)	65 %
Source lumens	1692 lm
Delivered lumens	1104 lm
Consumption	14.5 W
Luminaire efficacy	76 lm/W
Colour temperature	2700 K
Standard Deviation of Colour Matching	1.5 Step
Colour rendering index	80 Ra


Standard Operating Ambient Temperature	-20 / +50°C
Ordinary temperature on the glass	40°C


### LED Life / Failure Ratio



L70 B10 C0 361980h (at Tj 60 Ta 25 )


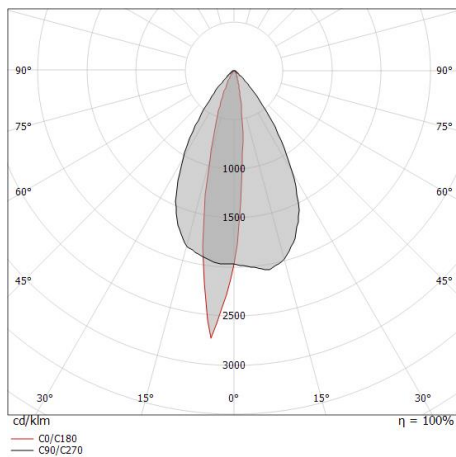




	<p>Cable and connector                  Length 2000 mm; insulation double; section 1.5 mm<sup>2</sup>; cable gland: no; external diameter: 9.5 mm; colors: blue - brown - yellow-green.</p>	<p><b>Code</b>  <u>99057</u></p>
--	---	--------------------------------------

	<p>Cable and connector                  Length 5000 mm; insulation double; section 1.5 mm<sup>2</sup>; cable gland: no; external diameter: 9.5 mm; colors: blue - brown - yellow-green.</p>	<p><b>Code</b>  <u>98147</u></p>
--	---	--------------------------------------

		<p>Cable and connector                  Length 10000 mm; insulation double; section 1.5 mm<sup>2</sup>; cable gland: no; external diameter: 9.5 mm; colors: blue - brown - yellow-green.</p>	<p><b>Code</b>  <u>98146</u></p>
---	---	--	--------------------------------------

		<p>Outer casing                  installation position: wall lights, floor; type of installation: masonry L=356mm, H=138.3mm, D=100.2mm.                  Material:Iron, colour:zinc, processing:Galvanising.</p>	<p><b>Finish</b>                  Grey</p>	<p><b>Code</b>  <u>98671</u></p>
--	---	---	--	--------------------------------------