




Cob40_RJ



Downlights | 1 arrayLED 18 W DC 500 mA | CRI 90
82478W60






Technical data

Type	Encasement with flange
Installation position	Ceiling
Installation environment	Indoor
Light Source	LED
Circuit structure	arrayLED
Optics	Wide Flood
Light emission direction	downward
Nominal power	18 W DC
Source lumens	2818 lm
Input voltage range	500mA
CCT / Tone	3000 K
Colour rendering index	90 Ra
C.C. / C.V.	CC
Safety class	3
IP	IP40
Optical compartment IP	IP44
IK	IK05
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	No
Dimmable article	DALI - 1-10V
Directional	No
Tilting	Yes
total angle (vertical plane)	50 °
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	0.15 m
Resin potting	No
Type of light emission	Single emission
Net weight	0.370 Kg
Electrostatic discharge protection	No
Surge protection	No

Finishing casing

Material	Die-cast Aluminium EN AB - 46100
Colour	Black
Processing	Powder coating

Electronics

	99115 1-10V - N/O button Multi Power 198~264V AC / 180~275V DC (1 art.)
	99106 On/Off Driver 198~264V AC (1 art.)
	C-E100001 Push and Simply Dim - DALI-2 Multi Power 198~264V AC / 180~275V DC (1 art.)

Cables Electrification

Cable connector	MALE JST SMR-02V-B
Cable connector	FEMALE JST SMP-02V-BC



Downlights | 1 arrayLED 18 W DC 500 mA | CRI 90 | Base
82478W60


Single emission recessed downlights for indoor application. The warm white LED light source with a wide flood light distribution is composed of 1 arrayed LEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 2818 lm, with a 156.6 lm/W nominal luminous efficacy.

The device body is made of die-cast aluminium en ab - 46100 and features a black finish, processed by means of powder coating. The ingress protection degree is IP40; the total weight is of 0.370 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 18 W. The power supply cable is included and features a 0.15 m length.

The device features protection class III and can be ceiling-mounted, with a 86 mm diameter hole (in plasterboard).

Compliant with the EN 60598-1 standard and its specific provisions.

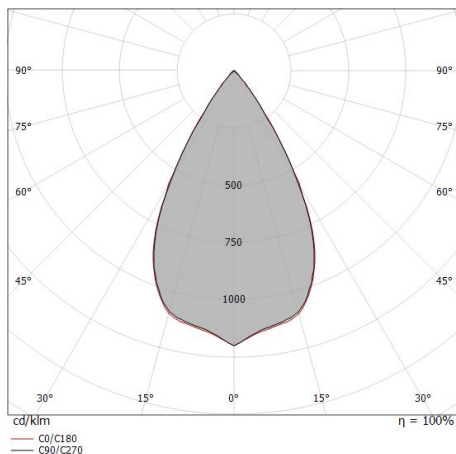

Distance [m]	Cone diameter [m]	illuminance [lx]
0.5	0.56 0.56	E(0°) 10483 E(C90) 29.1° 3503 E(C0) 29.3° 3496
1.0	1.11 1.12	E(0°) 2621 E(C90) 29.1° 876 E(C0) 29.3° 874
1.5	1.67 1.68	E(0°) 1165 E(C90) 29.1° 389 E(C0) 29.3° 388
2.0	2.23 2.24	E(0°) 655 E(C90) 29.1° 219 E(C0) 29.3° 219
2.5	2.78 2.81	E(0°) 419 E(C90) 29.1° 140 E(C0) 29.3° 140
3.0	3.34 3.37	E(0°) 291 E(C90) 29.1° 97 E(C0) 29.3° 97

— C0/C180 (Half-peak divergence: 58.6°)
— C90/C270 (Half-peak divergence: 58.2°)

Energy efficiency class

This product contains a light source of energy efficiency class E.

Illuminotechnical Features

Light Output Ratio (LOR)	77 %
Source lumens	2818 lm
Delivered lumens	2180 lm
Consumption	18 W
Luminaire efficacy	121 lm/W
Colour temperature	3000 K
Standard Deviation of Colour Matching	2 Step MacAdam
Colour rendering index	90 Ra
Colour Rendering Index	60 R9
Black Body Locus	On
Standard Operating Ambient Temperature	-20 / +50°C
Ordinary temperature on the glass	40°C

LED Life / Failure Ratio

L70 B10 C0 252000h (at Tj 65 Ta 25)

UGR


UGR axial	20.5
UGR transversal	20.5
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL

C0/C180 optics	58°
Light distribution simmetry	Symmetrical


COLOR VECTOR GRAPHIC






White decorative ring

Code
99901




Decorative ring in gold color

Code
99902



Decorative ring in copper color

Code
99903



Chrome decorative ring

Code
99904