




Uplights | x powerLED 0 W DC - 9 W AC | CRI 80  
82545M30

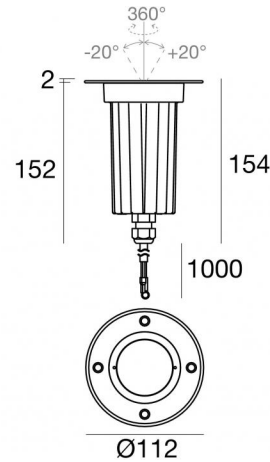

Technical data	
Type	Drive Over
Installation position	Floor
Installation environment	Outdoor
Light Source	LED
Circuit structure	powerLED
Optics	Medium Flood
Light emission direction	upward
Nominal power	0 W DC
Total Power	9 W
Nominal input voltage	220 - 240 V AC
Input voltage range	198 - 264 V AC
CCT / Tone	2700 K
Colour rendering index	80 Ra
C.C. / C.V.	AC
Safety class	1
IP	IP68
Installation limitations	Not for underwater use
IK	IK10
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	Driver
Dimmable article	No
Directional	No
Tilting	Yes
total angle (horizontal plane)	360 °
total angle (vertical plane)	40 °
Walk-over	Yes
Drive-over	2500 Kg
Cable included	Yes
Cable length	1 m
Resin potting	Yes
Type of light emission	Single emission
Net weight	0.780 Kg
Electrostatic discharge protection	Yes
Surge protection	4 KV
Product technological characteristics	TVS

### Finishing casing

Material	Die-cast Aluminium EN AB - 46100
Colour	black
Processing	Open pore anodizing + Powder Coating

### Finishing diffuser

Material	Extra clear glass - Tempered
Colour	transparent

### Finishing flange

Material	OT58 brass
Colour	Raw Brass

### Cables Electrification

Cable connector	No
-----------------	----



Suelo\_RXJ | Uplights | Accessories  
**82545M30**



Outer casing  
installation position: floor, land; type of installation: masonry L=110mm, H=220mm,  
D=110mm.  
Material:ABS Plastic, colour:black.

**Code**

98122