


Navata Pound Shaper distance



Projectors | 1 arrayLED 27 W DC 700 mA | CRI 98
82631N66

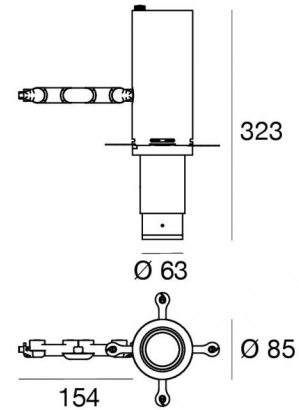


Technical data	
Type	Surface
Installation position	Wall lights - Ceiling - Floor
Installation environment	Indoor
Light Source	LED
Circuit structure	arrayLED
Optics	Shaper Long Distance
Light emission direction	frontal
Nominal power	27 W DC
Source lumens	3059 lm
Input voltage range	700mA
CCT / Tone	4000 K
Colour rendering index	98 Ra
C.C. / C.V.	CC
Safety class	3
IP	IP20
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	No
Dimmable article	DALI - 1-10V
Directional	Swivelling
total angle (vertical plane)	90 °
total angle (horizontal plane)	360 °
Tilting	No
Walk-over	No
Drive-over	No
Cable included	No
Resin potting	No
Type of light emission	Single emission
Net weight	1.45 Kg
Electrostatic discharge protection	No
Surge protection	No

Finishing casing

Material	Die-cast Aluminium EN AB - 46100
Colour	White
Processing	Powder coating

Electronics

	99112 On/Off Driver 198~264V AC
	99938 Multi Power 198~264V AC / 176~264V DC
	99936 Push and Simply Dim - DALI-2 Controller
	99946 DALI Multi Power 198~264V AC / 176~275V DC
	99948 Multi Power 198~264V AC / 176~264V DC
	83171 Bluetooth Controller
	C-E100008 Multi Power 198~264V AC / 180~275V DC

Navata Pound Shaper distance



Projectors | 1 arrayLED 27 W DC 700 mA | CRI 98 | Base 82631N66


Single emission projectors for indoor application. The natural white LED light source with a shaper long distance light distribution is composed of 1 arrayed LEDs with CCT of 4000 K and a CRI 98; the source luminous flux is 3059 lm, with a 113.3 lm/W nominal luminous efficacy.

The device body is made of die-cast aluminium en ab - 46100 and features a white finish, processed by means of powder coating. The ingress protection degree is IP20; the total weight is of 1.45 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 27 W.

The device features protection class III and can be wall lights, ceiling or floor-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

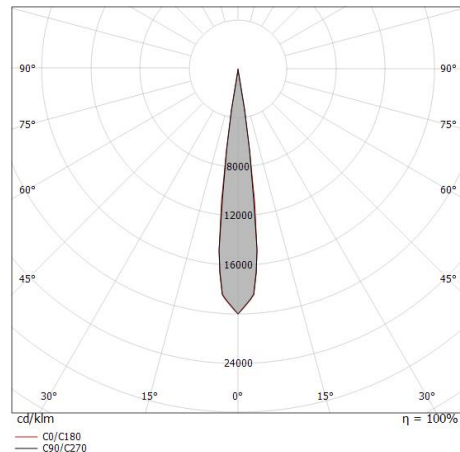

Distance [m]	Cone diameter [m]	illuminance [lx]
0.5	0.12 0.13	E(0°) 29512 E(C90) 7.1° 14928 E(C0) 7.2° 14443
1.0	0.25 0.25	E(0°) 7378 E(C90) 7.1° 3732 E(C0) 7.2° 3611
1.5	0.37 0.38	E(0°) 3279 E(C90) 7.1° 1659 E(C0) 7.2° 1605
2.0	0.50 0.51	E(0°) 1844 E(C90) 7.1° 933 E(C0) 7.2° 903
2.5	0.62 0.63	E(0°) 1180 E(C90) 7.1° 597 E(C0) 7.2° 578
3.0	0.75 0.76	E(0°) 820 E(C90) 7.1° 415 E(C0) 7.2° 401

— C0/C180 (Half-peak divergence: 14.4°)
— C90/C270 (Half-peak divergence: 14.2°)

Energy efficiency class

This product contains a light source of energy efficiency class F.

Illuminotechnical Features

Light Output Ratio (LOR)	12 %
Source lumens	3059 lm
Delivered lumens	369 lm
Consumption	27 W
Luminaire efficacy	13 lm/W
Colour temperature	4000 K
Standard Deviation of Colour Matching	2 Step MacAdam
Colour rendering index	98 Ra
Black Body Locus	On
Standard Operating Ambient Temperature	-20 / +50°C
Ordinary temperature on the glass	45°C

LED Life / Failure Ratio

L70 B10 C0 252000h (at Tj 65 Ta 25)



UGR

UGR axial	-5.3
UGR transversal	-5.3
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL

C0/C180 optics	14°
Light distribution simmetry	Symmetrical


COLOR VECTOR GRAPHIC

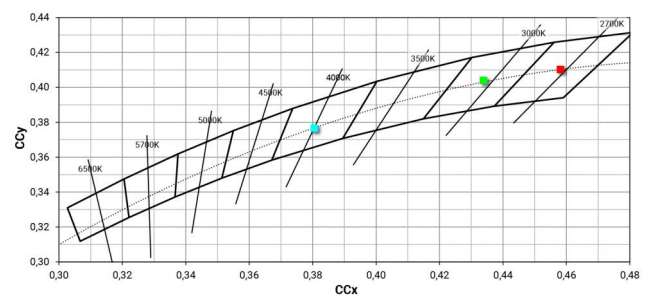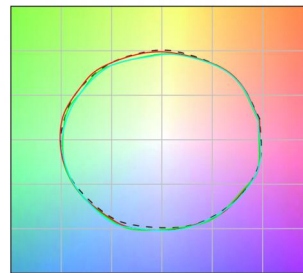



Navata Pound Shaper distance | Projectors | Accessories

82631N66



Fixing base - Base without power supply
Material:Iron, colour:White, processing:Powder coating.

Code
98588



Tool - Gobo holder
Material:Aluminium, colour:black, processing:Anodisation.

Code
99853