



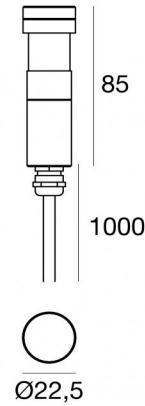

Uplights | x powerLED 0 W DC 24 V | CRI 80
82698N20



Technical data	
Type	Walk Over
Installation position	Floor
Installation environment	Outdoor
Light Source	LED
Circuit structure	powerLED
Optics	Flood
Light emission direction	upward
Nominal power	0 W DC
Input voltage range	24 V
CCT / Tone	4000 K
Colour rendering index	80 Ra
C.C. / C.V.	CV
Safety class	3
IP	IP68
Installation limitations	Not for underwater use
IK	IK10
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	No
C.V. - C.C. Converter	Converter 24V included
Dimmable article	No
Directional	No
Tilting	No
Walk-over	Yes
Drive-over	2000 Kg
Cable included	Yes
Cable length	1 m
Resin potting	Yes
Type of light emission	Single emission
Net weight	0.089 Kg
Electrostatic discharge protection	No
Surge protection	No
Product technological characteristics	Acquastop - TVS

Finishing casing

Material	AISI 316 steel
Colour	steel

Finishing diffuser


Material	Extra clear glass - Tempered
Colour	transparent
Processing	Silk-screening

Cables Electrification with converter

Cable connector	No
-----------------	----



Orma_F | Uplights | Accessories
82698N20



Outer casing
 installation position: floor, land; type of installation: masonry L=22.5mm, H=96mm,
 D=22.5mm.
 Material:ABS Plastic, colour:black.

Code
99925



Outer casing
 installation position: floor, land; type of installation: masonry L=29mm, H=111mm,
 D=29mm.
 Material:ABS Plastic, colour:black.

Code
83037