




Wall Lights | 1 x powerLED 1 W DC 350 mA | CRI 80
82708M07



 28



Technical data	
Type	Encasement with flange - -
Installation environment	Outdoor
Light Source	LED
Circuit structure	powerLED
Optics	Asymmetric Wallwasher
Nominal power	1 W DC
Source lumens	145 lm
Input voltage range	350mA
CCT / Tone	2700 K
Colour rendering index	80 Ra
C.C. / C.V.	CC
Safety class	3
IP	IP66
IK	IK09
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	No
Dimmable article	DALI - 1-10V
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	1 m
Resin potting	Yes
Type of light emission	Single emission
Net weight	0.062 Kg
Electrostatic discharge protection	No
Surge protection	No

Finishing casing

Material	Brass
Colour	Grey
Processing	Coating

Electronics



89421
 On/Off Driver 198~264V AC / 176~275V DC (1 - 6 art.)



89419
 On/Off Driver 198~264V AC / 176~275V DC (1 - 2 art.)

Wall Lights | 1 x powerLED 1 W DC 350 mA | CRI 80 | Base 82708M07

Single emission wall lights for outdoor application. The super warm white LED light source with a asymmetric wallwasher light distribution is composed of 1 powered LEDs with CCT of 2700 K and a CRI 80; the source luminous flux is 145 lm, with a 145.0 lm/W nominal luminous efficacy.

The device body is made of brass and features a grey finish, processed by means of coating. The ingress protection degree is IP66; the total weight is of 0.062 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 1 W. The power supply cable is included and features a 1 m length.

The device features protection class III, with a 28 mm diameter hole (in plasterboard) with an outer casing, code 84915(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

Energy efficiency class

This product contains a light source of energy efficiency class D.

Illuminotechnical Features

Light Output Ratio (LOR)	27 %
Source lumens	145 lm
Delivered lumens	40 lm
Consumption	1,0 W
Luminaire efficacy	40 lm/W
Colour temperature	2700 K
Standard Deviation of Colour Matching	1.5 Step
Colour rendering index	80 Ra


Standard Operating Ambient Temperature	-20 / +50°C
Ordinary temperature on the glass	40°C

LED Life / Failure Ratio

L70 B10 C0 361980h (at Tj 60 Ta 25)

OPTICAL

C0/C180 optics	61°
Light distribution symmetry	Asymmetrical

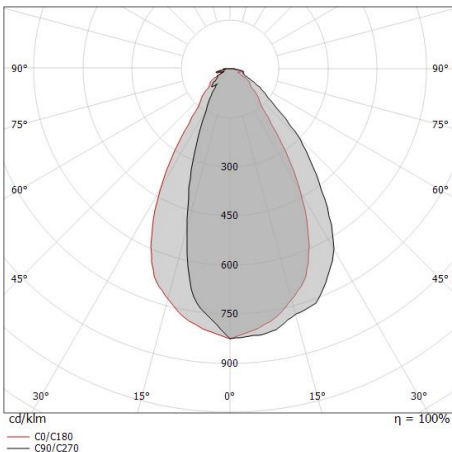

Distance [m]	Cone diameter [m]	Illuminance [lx]
0.5	0.59	E(0°) 130 E(C0) 42
1.0	1.18	E(0°) 33 E(C0) 10
1.5	1.77	E(0°) 14 E(C0) 5
2.0	2.36	E(0°) 8 E(C0) 3
2.5	2.95	E(0°) 5 E(C0) 2
3.0	3.53	E(0°) 4 E(C0) 1

Distance [m] Cone diameter [m] Illuminance [lx]
— C0/C180 (Half-peak divergence: 61.0°)



Clip | Step Lights | Accessories
82708M07



Outer casing

installation position: ceiling; type of installation: masonry L=42mm, H=35mm, D=35mm.

Material:ABS Plastic, colour:black.

Code

84336



Outer casing

installation position: wall lights; type of installation: masonry L=49mm, H=60mm, D=60mm.

Material:ABS Plastic, colour:black.

Code

84915