


# Vedette\_Q Single emission



Wall Lights | arrayLED 0 W DC - 15.5 W AC | CRI 80  
82804W00

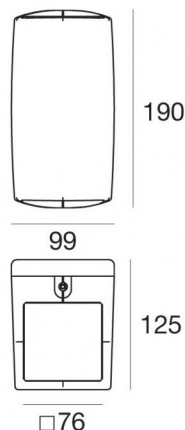

| Technical data                                 |                 |
|--|-----------------|
| Type   | Surface         |
| Installation position                          | Wall lights     |
| Installation environment                       | Outdoor         |
| Light Source                                   | LED             |
| Circuit structure                              | arrayLED        |
| Optics   | Diffused        |
| Light emission direction                       | downward        |
| Nominal power                                  | 0 W DC          |
| Total Power                                    | 15.5 W          |
| Nominal input voltage                          | 220 - 240 V AC  |
| Input voltage range                            | 198 - 264 V AC  |
| CCT / Tone                                     | 3000 K          |
| Colour rendering index                         | 80 Ra           |
| C.C. / C.V.                                    | AC              |
| Safety class                                   | 1               |
| IP   | IP66            |
| IK   | IK06            |
| Glow wire test                                 | 850°            |
| Direct mounting on normally flammable surfaces | Yes             |
| CE   | Yes             |
| Driver included                                | Driver          |
| Dimmable article                               | No              |
| Directional                                    | No              |
| Tilting  | No              |
| Walk-over                                      | No              |
| Drive-over                                     | No              |
| Cable included                                 | Yes             |
| Cable length                                   | 1 m             |
| Resin potting                                  | Yes             |
| Type of light emission                         | Single emission |
| Net weight                                     | 1.75 Kg         |
| Electrostatic discharge protection             | Yes             |
| Surge protection                               | 1 KV            |
| Product technological characteristics          | Acquastop       |

| Finishing casing |                                      |
|------------------|--------------------------------------|
| Material         | Die-cast Aluminium EN AB - 46100     |
| Colour           | Black                                |
| Processing       | Open pore anodizing + Powder Coating |

| Finishing diffuser |                              |
|--------------------|------------------------------|
| Material           | Extra clear glass - Tempered |
| Colour             | opaline                      |
| Processing         | Sandblasting                 |

| Cables Electrification |    |
|------------------------|----|
| Cable connector        | No |