

Vedette_Q Single emission



Wall Lights | 198-264 V
1 arrayLED 14 W DC - 15.5 W AC | CRI 80

82805N00



| Technical data | |
|--|-----------------|
| Type | Surface |
| Installation position | Wall lights |
| Installation environment | Outdoor |
| Light Source | LED |
| Circuit structure | arrayLED |
| Optics | Diffused |
| Light emission direction | downward |
| Nominal power | 14 W DC |
| Total Power | 15.5 W |
| Source lumens | 1794 lm |
| Nominal input voltage | 220 - 240 V AC |
| Input voltage range | 198 - 264 V AC |
| Frequency | 50 - 60 Hz |
| CCT / Tone | 4000 K |
| Colour rendering index | 80 Ra |
| C.C. / C.V. | AC |
| Safety class | 1 |
| IP | IP66 |
| IK | IK06 |
| Glow wire test | 850° |
| Direct mounting on normally flammable surfaces | Yes |
| CE | Yes |
| Driver included | Driver |
| Dimmable article | No |
| Directional | No |
| Tilting | No |
| Walk-over | No |
| Drive-over | No |
| Cable included | Yes |
| Cable length | 1 m |
| Resin potting | Yes |
| Type of light emission | Single emission |
| Net weight | 1.75 Kg |
| Electrostatic discharge protection | Yes |
| Surge protection | 1 KV |
| Product technological characteristics | Acquastop |

| Finishing casing | |
|--------------------|--------------------------------------|
| Material | Die-cast Aluminium EN AB - 46100 |
| Colour | Grey |
| Processing | Open pore anodizing + Powder Coating |
| Finishing diffuser | |
| Material | Extra clear glass - Tempered |
| Colour | opaline |
| Processing | Sandblasting |



Wall Lights | 198-264 V | 1 arrayLED 14 W DC - 15.5 W AC | CRI 80 | Base 82805N00

Energy efficiency class

This product contains a light source of energy efficiency class E.

Illuminotechnical Features

| | |
|--|----------------|
| Light Output Ratio (LOR) | 27 % |
| Source lumens | 1794 lm |
| Delivered lumens | 491 lm |
| Consumption | 15.5 W |
| Luminaire efficacy | 31 lm/W |
| Colour temperature | 4000 K |
| Standard Deviation of Colour Matching | 2 Step MacAdam |
| Colour rendering index | 80 Ra |
| Standard Operating Ambient Temperature | -20 / +50°C |
| Ordinary temperature on the glass | 40°C |

LED Life / Failure Ratio

L70 B10 C0 252000h (at Tj 65 Ta 25)

UGR

| | |
|-------------------|----------|
| UGR axial | 30.4 |
| UGR transversal | 30.6 |
| X=4H Y=8H | S=0.25H |
| Reflection factor | 70/50/20 |

OPTICAL

| | |
|-----------------------------|-------------|
| C0/C180 optics | 85° |
| Light distribution symmetry | Symmetrical |


Single emission wall lights for outdoor application. The natural white LED light source with a diffused light distribution is composed of 1 arrayed LEDs with CCT of 4000 K and a CRI 80; the source luminous flux is 1794 lm, with a 128.1 lm/W nominal luminous efficacy.

The device body is made of die-cast aluminium en ab - 46100 and features a grey finish, processed by means of open pore anodizing + powder coating; the diffuser is made of extra clear glass - tempered with a sandblasting treatment. The ingress protection degree is IP66; the total weight is of 1.75 kg.

The total absorbed power is 15.5 W. The power supply cable is included and features a 1 m length.

The device features protection class I and can be wall lights-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

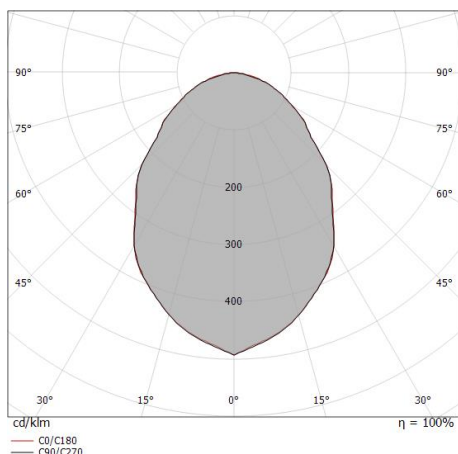

| Distance [m] | Cone diameter [m] | Illuminance [lx] | E(0°) | E(C90) | E(C0) |
|--------------|-------------------|-------------------|-------|--------|-------|
| 0.5 | 0.92 0.93 | 968 192 191 | 42.7° | 42.8° | 42.8° |
| 1.0 | 1.85 1.85 | 242 48 48 | 42.7° | 42.8° | 42.8° |
| 1.5 | 2.77 2.78 | 108 21 21 | 42.7° | 42.8° | 42.8° |
| 2.0 | 3.69 3.70 | 60 12 12 | 42.7° | 42.8° | 42.8° |
| 2.5 | 4.61 4.63 | 39 8 8 | 42.7° | 42.8° | 42.8° |
| 3.0 | 5.54 5.56 | 27 5 5 | 42.7° | 42.8° | 42.8° |

Distance [m] Cone diameter [m] Illuminance [lx]

— C0/C180 (Half-peak divergence: 85.6°)
— C90/C270 (Half-peak divergence: 85.4°)