

# Vedette\_Q Single emission



Wall Lights | 198-264 V  
1 arrayLED 14 W DC - 15.5 W AC | CRI 80

**82806N30**



Technical data	
Type	Surface
Installation position	Wall lights
Installation environment	Outdoor
Light Source	LED
Circuit structure	arrayLED
Optics	Medium Flood
Light emission direction	downward
Nominal power	14 W DC
Total Power	15.5 W
Source lumens	1794 lm
Nominal input voltage	220 - 240 V AC
Input voltage range	198 - 264 V AC
Frequency	50 - 60 Hz
CCT / Tone	4000 K
Colour rendering index	80 Ra
C.C. / C.V.	AC
Safety class	1
IP	IP66
IK	IK06
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	Driver
Dimmable article	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	1 m
Resin potting	Yes
Type of light emission	Single emission
Net weight	1.75 Kg
Electrostatic discharge protection	Yes
Surge protection	1 KV
Product technological characteristics	Acquastop

## Finishing casing

Material	Die-cast Aluminium EN AB - 46100
Colour	Dark brown
Processing	Open pore anodizing + Powder Coating

## Finishing diffuser

Material	Extra clear glass - Tempered
Colour	opaline
Processing	Sandblasting

## Cables Electrification

Cable connector	No
-----------------	----



Wall Lights | 198-264 V | 1 arrayLED 14 W DC - 15.5 W AC | CRI 80 | Base  
82806N30

Single emission wall lights for outdoor application. The natural white LED light source with a medium flood light distribution is composed of 1 arrayed LEDs with CCT of 4000 K and a CRI 80; the source luminous flux is 1794 lm, with a 128.1 lm/W nominal luminous efficacy.

The device body is made of die-cast aluminium en ab - 46100 and features a dark brown finish, processed by means of open pore anodizing + powder coating; the diffuser is made of extra clear glass - tempered with a sandblasting treatment. The ingress protection degree is IP66; the total weight is of 1.75 kg.

The total absorbed power is 15.5 W. The power supply cable is included and features a 1 m length.

The device features protection class I and can be wall lights-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

### Energy efficiency class

This product contains a light source of energy efficiency class E.

### Illuminotechnical Features

Light Output Ratio (LOR)	76 %
Source lumens	1794 lm
Delivered lumens	1380 lm
Consumption	15.5 W
Luminaire efficacy	89 lm/W
Colour temperature	4000 K
Standard Deviation of Colour Matching	2 Step MacAdam
Colour rendering index	80 Ra

Standard Operating Ambient Temperature	-20 / +50°C
Ordinary temperature on the glass	40°C

### LED Life / Failure Ratio


L70 B10 C0 252000h (at Tj 65 Ta 25 )

### UGR

UGR axial	17.2
UGR transversal	17.2
X=4H   Y=8H	S=0.25H
Reflection factor	70/50/20

### OPTICAL

C0/C180 optics	33°
Light distribution simmetry	Symmetrical

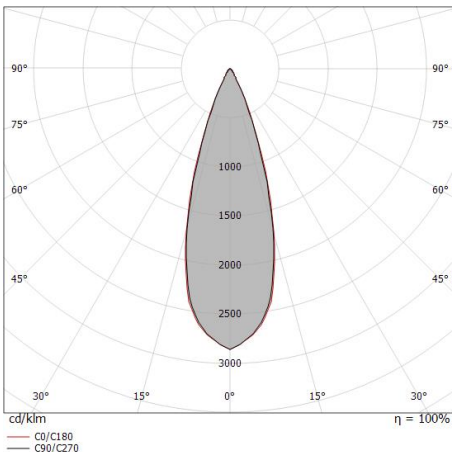

Distance [m]	Cone diameter [m]	illuminance [lx]
0.5	0.30 0.30	E(0°) 15780 E(C90) 16.5° 7019 E(C0) 16.8° 6934
1.0	0.59 0.60	E(0°) 3945 E(C90) 16.5° 1755 E(C0) 16.8° 1733
1.5	0.89 0.91	E(0°) 1753 E(C90) 16.5° 780 E(C0) 16.8° 770
2.0	1.18 1.21	E(0°) 986 E(C90) 16.5° 439 E(C0) 16.8° 433
2.5	1.48 1.51	E(0°) 631 E(C90) 16.5° 281 E(C0) 16.8° 277
3.0	1.78 1.81	E(0°) 438 E(C90) 16.5° 195 E(C0) 16.8° 193

Distance [m] Cone diameter [m] illuminance [lx]

— C0/C180 (Half-peak divergence: 33.6°)  
— C90/C270 (Half-peak divergence: 33.0°)