


# Beret\_2R



Uplights | x powerLED 0 W DC - 3 W AC | CRI 80  
83567W08

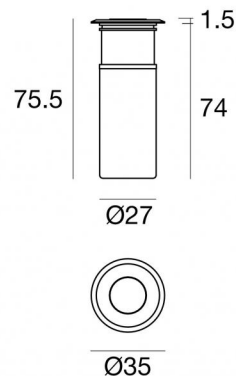

Technical data	
Type	Walk Over
Installation position	Wall lights - Floor
Installation environment	Outdoor
Light Source	LED
Circuit structure	powerLED
Optics	Narrow Spot
Light emission direction	upward
Nominal power	0 W DC
Total Power	3 W
Nominal input voltage	220 - 240 V AC
Input voltage range	198 - 264 V AC
CCT / Tone	3000 K
Colour rendering index	80 Ra
C.C. / C.V.	AC
Safety class	2
IP	IP67
IK	IK10
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	Driver
Dimmable article	No
Directional	No
Tilting	No
Walk-over	Yes
Drive-over	2000 Kg
Cable included	Yes
Cable length	1 m
Resin potting	Yes
Type of light emission	Single emission
Net weight	0.230 Kg
Electrostatic discharge protection	Yes
Surge protection	1 KV
Product technological characteristics	Acquastop

## Finishing casing

Material	Stainless steel 316L
Colour	steel
Processing	Shot peening

## Cables Electrification

Cable connector	No
-----------------	----



Beret\_2R | Uplights | Accessories  
**83567W08**



Outer casing  
installation position: floor, land; type of installation: masonry L=87mm, H=60mm, D=60mm.  
Material:ABS Plastic, colour:black.

**Code**  
84918