


# Warp\_R PRO



Downlights | 1 arrayLED 25 W DC 700 mA | CRI 90  
83774M15

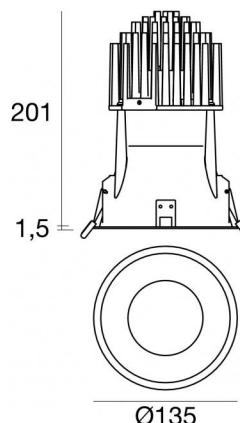

| Technical data                                 |                        |
|--|------------------------|
| Type   | Encasement with flange |
| Installation position                          | Ceiling                |
| Installation environment                       | Indoor                 |
| Light Source                                   | LED                    |
| Circuit structure                              | arrayLED               |
| Optics   | Spot                   |
| Light emission direction                       | downward               |
| Nominal power                                  | 25 W DC                |
| Source lumens                                  | 3967 lm                |
| Input voltage range                            | 700mA                  |
| CCT / Tone                                     | 2700 K                 |
| Colour rendering index                         | 90 Ra                  |
| C.C. / C.V.                                    | CC                     |
| Safety class                                   | 3                      |
| IP   | IP44                   |
| Optical compartment IP                         | IP65                   |
| Glow wire test                                 | 850°                   |
| Direct mounting on normally flammable surfaces | Yes                    |
| CE   | Yes                    |
| Driver included                                | No                     |
| Dimmable article                               | DALI - 1-10V           |
| Directional                                    | No                     |
| Tilting  | No                     |
| Walk-over                                      | No                     |
| Drive-over                                     | No                     |
| Cable included                                 | Yes                    |
| Cable length                                   | 0.300 m                |
| Resin potting                                  | No                     |
| Type of light emission                         | Single emission        |
| Net weight                                     | 0.93 Kg                |
| Electrostatic discharge protection             | No                     |
| Surge protection                               | No                     |
| Optics technology                              | F.O.L.                 |

## Finishing casing

|            |                                  |
|------------|----------------------------------|
| Material   | Die-cast Aluminium EN AB - 46100 |
| Colour     | White                            |
| Processing | Powder coating                   |

## Finishing diffuser

|          |                            |
|----------|----------------------------|
| Material | UV Resistant Polycarbonate |
| Colour   | transparent                |

## Finishing radiator

|            |                                  |
|------------|----------------------------------|
| Material   | Die-cast Aluminium EN AB - 46100 |
| Processing | Tumbling                         |

## Electronics



99112  
On/Off Driver 198-264V AC (1 art.)



83066  
1-10V - Push and Simply Dim - DALI-2 Controller (1 art.)



C-E100031  
DALI - Push and Simply Dim Multi Power 198-264V AC / 180-275V DC (1 art.)

## Cables Electrification

|                       |                |
|-----------------------|----------------|
| Cable connector       | Male Easy plug |
| IP (locked condition) | 66             |



Downlights | 1 arrayLED 25 W DC 700 mA | CRI 90 | Base  
83774M15

Single emission recessed downlights for indoor application. The super warm white LED light source with a spot light distribution is composed of 1 arrayLEDs with CCT of 2700 K and a CRI 90; the source luminous flux is 3967 lm, with a 158.7 lm/W nominal luminous efficacy.

The device body is made of die-cast aluminium en ab - 46100 and features a white finish, processed by means of powder coating; the diffuser is made of uv resistant polycarbonate. The ingress protection degree is IP44; the total weight is of 0.93 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 25 W. The power supply cable is included and features a 0.300 m length.

The device features protection class III and can be ceiling-mounted, with a 127 mm diameter hole (in plasterboard).

Compliant with the EN 60598-1 standard and its specific provisions.

### Energy efficiency class

This product contains a light source of energy efficiency class E.

### Illuminotechnical Features

|                                       |                |
|---------------------------------------|----------------|
| Light Output Ratio (LOR)              | 30 %           |
| Source lumens                         | 3967 lm        |
| Delivered lumens                      | 1211 lm        |
| Consumption                           | 25 W           |
| Luminaire efficacy                    | 48 lm/W        |
| Colour temperature                    | 2700 K         |
| Standard Deviation of Colour Matching | 2 Step MacAdam |
| Colour rendering index                | 90 Ra          |

|  |             |
|--|-------------|
| Standard Operating Ambient Temperature | -20 / +50°C |
| Ordinary temperature on the glass      | 40°C        |

### LED Life / Failure Ratio


L70 B10 C0 252000h (at Tj 65 Ta 25)

### UGR

|                   |          |
|-------------------|----------|
| UGR axial         | 5.2      |
| UGR transversal   | 4.9      |
| X=4H   Y=8H       | S=0.25H  |
| Reflection factor | 70/50/20 |

### OPTICAL

|                             |             |
|-----------------------------|-------------|
| C0/C180 optics              | 22°         |
| Light distribution simmetry | Symmetrical |

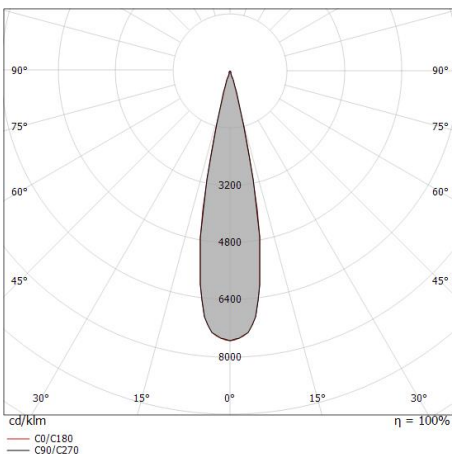

| Distance [m] | Cone diameter [m] | E(0°) | E(C90) | E(C0) |
|--------------|-------------------|-------|--------|-------|
| 0.5          | 0.20<br>0.20      | 36545 | 17494  | 17284 |
| 1.0          | 0.39<br>0.40      | 9136  | 4373   | 4321  |
| 1.5          | 0.59<br>0.59      | 4061  | 1944   | 1920  |
| 2.0          | 0.78<br>0.78      | 2284  | 1093   | 1080  |
| 2.5          | 0.98<br>0.99      | 1462  | 700    | 691   |
| 3.0          | 1.18<br>1.19      | 1015  | 486    | 480   |

Distance [m]      Cone diameter [m]      Illuminance [lx]

— C0/C180 (Half-peak divergence: 22.4°)  
— C90/C270 (Half-peak divergence: 22.2°)