## Ink system\_SP Focus


Systems - Lines | topLED 0 W DC 24 V | CRI 90 83958W85





Technical data		
Designer	Linea Light	
Туре	Cabled	
Installation position	Cable	
Installation environment	Indoor	
Light Source	LED	
Circuit structure	topLED	
Optics	Adjustable Focus	
Light emission direction	downward	
Nominal power	0 W DC	
Input voltage range	24 V	
Frequency	50-60 Hz	
CCT / Tone	3000 K	
Colour rendering index	90 Ra	
C.C. / C.V.	CV	
Safety class	3	
IP	IP40	
Glow wire test	650°	
Direct mounting on normally flammable surfaces	Yes	
CE	Yes	
Driver included	No	
C.V C.C. Converter	Converter 24V included	
Dimmable article	DALI - 1-10V - PUSH DIM	
Directional	Swivelling	
total angle (vertical plane)	330 °	
Tilting	Yes	
total angle (horizontal plane)	90 °	
Walk-over	No	
Drive-over	No	
Cable included	No	
Resin potting	No	
Type of light emission	Single emission	
Net weight	0.55 Kg	
Electrostatic discharge protection	No	
Surge protection	No	


## EAE 🚾 CE 🕱 🕐 🏦 🗑 C.V. 🖂 🎮 🕑 🙆



Finishing casin	g
Material	Aluminium
Colour	5G 9005 Black
Processing	Coating
Finishing diffus	er
Material	PMMA
Colour	transparent
Finishing mour	ting frame
Material	Aluminium
Colour	5G 9005 Black
Processing	Coating

## Ink system\_SP Focus

Ink system\_SP Focus | Lines | Accessories 83958W85

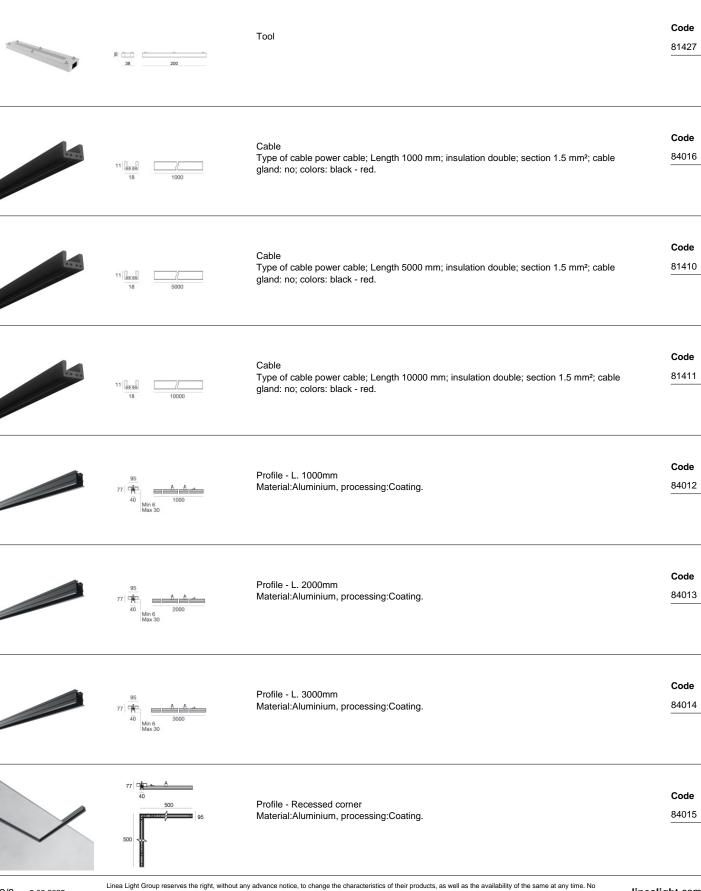

2/3 5.02.2025

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a 4/- 10% tolerance for the flow, CCT and power data. linealight.com



## Ink system\_SP Focus

Ink system\_SP Focus | Lines | Accessories 83958W85

