


Ink system_LP UGR



Systems - Lines | 54 topLED 9 W DC 24 V | CRI 90
84004W30

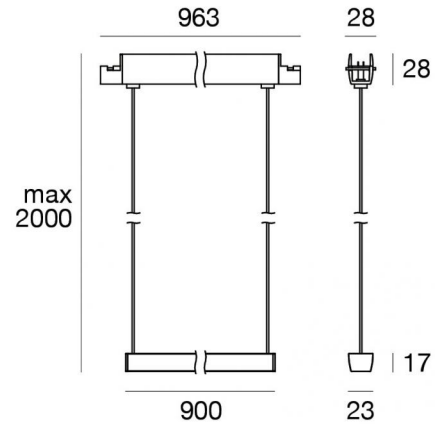

Technical data	
Designer	Linea Light
Construction year	2020
Type	Cabled - -
Installation position	Cable
Installation environment	Indoor
Light Source	LED
Circuit structure	topLED
Optics	Medium Flood
Light emission direction	downward
Nominal power	9 W DC
Source lumens	781 lm
Input voltage range	24 V
Frequency	50-60 Hz
CCT / Tone	3000 K
Colour rendering index	90 Ra
C.C. / C.V.	CV
Safety class	3
IP	IP40
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	No
C.V. - C.C. Converter	Converter 24V included
Dimmable article	P2P
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	No
Resin potting	No
Type of light emission	Single emission
Net weight	1 Kg
Electrostatic discharge protection	No
Surge protection	No

Finishing casing

Material	Aluminium
Colour	5G 9005 Black
Processing	Coating




Finishing diffuser

Material	PMMA
Colour	transparent

Finishing mounting frame

Material	Aluminium
Colour	5G 9005 Black
Processing	Coating

Electronics

	81416 On/Off Driver 220~240V AC 120 W
	81417 On/Off Driver 220~240V AC 180 W (1 - 20 art.)
	84018 DALI - DALI-2 - P2P Controller 24V DC 150 W (1 - 16 art.)



Systems - Lines | 54 topLED 9 W DC 24 V | CRI 90 | Base 84004W30



Single emission systems or lines for indoor application. The warm white LED light source with a medium flood light distribution is composed of 54 topped LEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 781 lm, with a 86.8 lm/W nominal luminous efficacy.

The device body is made of aluminium and features a 5g 9005 black finish, processed by means of coating; the diffuser is made of pmma; the mounting frame is made of aluminium, with a 5g 9005 black finish, processed by means of coating. The ingress protection degree is IP40; the total weight is of 1 kg.

The total absorbed power is 9 W.

The device features protection class III and can be cable-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

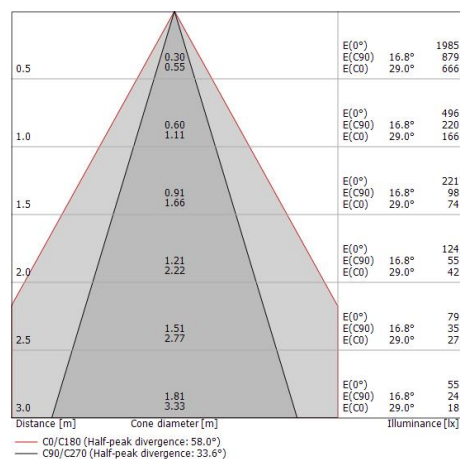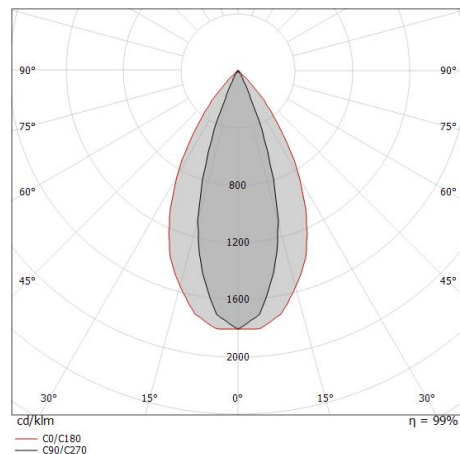

Energy efficiency class

This product contains 2 light sources of energy efficiency class F.

Illuminotechnical Features

Light Output Ratio (LOR)	35 %
Source lumens	781 lm
Delivered lumens	275 lm
Consumption	9 W
Luminaire efficacy	30 lm/W
Colour temperature	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	90 Ra
Junction temperature (lighting fixture)	80
Standard Operating Ambient Temperature	-20 / +50°C

LED Life / Failure Ratio

L70 B20 C0 72500h (at Tj 115 Ta 25)

UGR

UGR axial	-4.3
UGR transversal	11.6
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL

C90/C270 optics	34°
C0/C180 optics	58°
Light distribution simmetry	Symmetrical 2 assis




Ink system_LP UGR | Lines | Accessories
84004W30

		<p>Cable Type of cable power cable; Length 5000 mm; insulation double; section 1.5 mm²; cable gland: no; colors: black - red.</p>	<p>Code <u>81410</u></p>
		<p>Tool Material:steel, colour:steel.</p>	<p>Code <u>81427</u></p>
		<p>Cable Type of cable power cable; Length 1000 mm; insulation double; section 1.5 mm²; cable gland: no; colors: black - red.</p>	<p>Code <u>84016</u></p>
		<p>Profile - L. 1000mm Material:Aluminium, processing:Coating.</p>	<p>Code <u>84012</u></p>
		<p>Profile - L. 2000mm Material:Aluminium, processing:Coating.</p>	<p>Code <u>84013</u></p>
		<p>Profile - L. 3000mm Material:Aluminium, processing:Coating.</p>	<p>Code <u>84014</u></p>
		<p>Profile - Recessed corner Material:Aluminium, processing:Coating.</p>	<p>Code <u>84015</u></p>
		<p>Profile - Recessed corner - IN Material:Aluminium, processing:Coating.</p>	<p>Code <u>84073</u></p>

Ink system_LP UGR




Ink system_LP UGR | Lines | Accessories
84004W30




Profile - Recessed corner - OUT
Material:Aluminium, processing:Coating.

Code
84074



Closing cap - 2X
Material:PC, colour:black.

Code
83153



Template
Material:Iron, colour:5G 9005 Black, processing:Coating.

Code
83186



Cable
Type of cable power cable; Length 10000 mm; insulation double; section 1.5 mm²; cable gland: no; colors: black - red.

Code
81411