




Downlights | x powerLEDs 0 W DC 700 mA | CRI 90

Dynamic White

84160D30

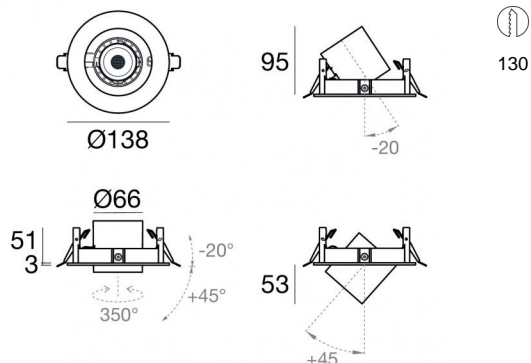

Technical data

| | |
|--|------------------------|
| Type | Encasement with flange |
| Installation position | Ceiling |
| Installation environment | Indoor |
| Light Source | LED |
| Circuit structure | powerLEDs |
| Optics | Medium Flood |
| Light emission direction | downward |
| Nominal power | 0 W DC |
| Input voltage range | 700mA |
| CCT / Tone | Dynamic White |
| Colour rendering index | 90 Ra |
| C.C. / C.V. | CC |
| Safety class | 3 |
| IP | IP20 |
| Glow wire test | 850° |
| Direct mounting on normally flammable surfaces | Yes |
| CE | Yes |
| Driver included | No |
| Dimmable article | DALI DT8 |
| Directional | Extractable |
| total angle (vertical plane) | 65 ° |
| total angle (horizontal plane) | 350 ° |
| Tilting | No |
| Walk-over | No |
| Drive-over | No |
| Cable included | Yes |
| Cable length | 0.35 m |
| Resin potting | No |
| Type of light emission | Single emission |
| Net weight | 0.920 Kg |
| Electrostatic discharge protection | No |
| Surge protection | No |

Finishing casing

| | |
|------------|----------------------------------|
| Material | Die-cast Aluminium EN AB - 46100 |
| Colour | Black |
| Processing | Powder coating |

Finishing mounting frame


| | |
|------------|----------------------------------|
| Material | Die-cast Aluminium EN AB - 46100 |
| Colour | Black |
| Processing | Powder coating |

Cables Electrification

| | |
|-----------------|----|
| Cable connector | No |
|-----------------|----|



| | | |
|--|--|-------------------------------------|
| | <p>Optics Light distribution: spot,Cover material: uv resistant polycarbonate</p> | <p>Code <u>99827</u></p> |
| | <p>Optics Light distribution: medium flood,Cover material: ,uv resistant polycarbonate,uv resistant polycarbonate,uv resistant polycarbonate</p> | <p>Code <u>99828</u></p> |
| | <p>Optics Light distribution: flood,Cover material: ,uv resistant polycarbonate,uv resistant polycarbonate,uv resistant polycarbonate</p> | <p>Code <u>99829</u></p> |
| | <p>Optics - Focal kit (min 16° max 50°) Light distribution: adjustable,Cover material: ,aluminium</p> | <p>Code <u>99844</u></p> |
| | <p>Anti-glare Anti-glare Type: honeycomb louvre. Material:Pom-C, colour:Black.</p> | <p>Code <u>99780</u></p> |
| | <p>Diffuser Diffuser Type: elliptical filter. Material:Pom-C, colour:Black.</p> | <p>Code <u>99781</u></p> |
| | <p>Anti-glare Anti-glare Type: 45° cylindrical screen. Material:Pom-C, colour:Black.</p> | <p>Code <u>99782</u></p> |
| | <p>Anti-glare Anti-glare Type: cylindrical screen. Material:Pom-C, colour:Black.</p> | <p>Code <u>99783</u></p> |



Anti-glare
Anti-glare Type: cross louvres.
Material:Pom-C, colour:Black.

Code
99779



Carter
installation position: ceiling L=115mm, H=99.6mm, D=120mm.
Material:PC, colour:black.

Finish
Black **Code**
99510