


# Periskop60



Projectors | x powerLED 0 W DC - 7.5 W AC  
CRI 80  
**84239M10**

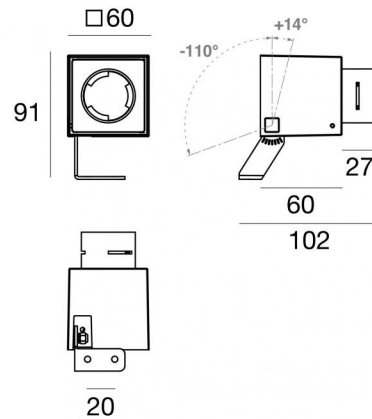

Technical data	
Type	Surface
Installation position	Wall lights - Ceiling - Floor
Installation environment	Outdoor
Light Source	LED
Circuit structure	powerLED
Optics	Spot
Light emission direction	frontal
Nominal power	0 W DC
Total Power	7.5 W
Nominal input voltage	220 - 240 V AC
Input voltage range	180 - 264 V AC
CCT / Tone	2700 K
Colour rendering index	80 Ra
C.C. / C.V.	AC
Safety class	2
IP	IP66
IK	IK08
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	Driver
Dimmable article	No
Directional	Swivelling
total angle (vertical plane)	124 °
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	1 m
Resin potting	No
Type of light emission	Single emission
Net weight	0.35 Kg
Electrostatic discharge protection	Yes
Surge protection	1 KV

## Finishing casing

Material	Die-cast Aluminium EN AB - 46100
Colour	Grey
Processing	Open pore anodizing + Powder Coating

## Finishing diffuser

Material	Extra clear glass - Tempered
Colour	transparent
Processing	Silk-screening

## Finishing bracket

Material	AISI 304 steel
Colour	Black
Processing	Powder coating

## Cables Electrification

Cable connector	No
-----------------	----




Picket  
installation position: land,Cover material: pc

**Code**  
89371




Picket - L. 160mm  
installation position: land,Cover material: aisi 304 steel

**Code**  
98624



Picket - L. 700mm  
installation position: land,Cover material: aisi 304 steel

**Code**  
C-F500002



Picket - L. 1000mm  
installation position: land,Cover material: aisi 304 steel

**Code**  
C-F500003