


Shaker



Projectors | x powerLED 0 W DC - 3 W AC | CRI 80
84241N30

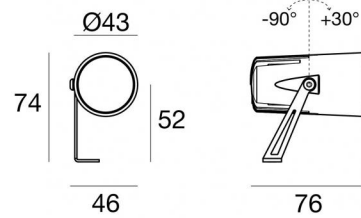

Technical data	
Type	Surface
Installation position	Wall lights - Ceiling - Floor
Installation environment	Outdoor
Light Source	LED
Circuit structure	powerLED
Optics	Medium Flood
Light emission direction	frontal
Nominal power	0 W DC
Total Power	3 W
Nominal input voltage	220 - 240 V AC
Input voltage range	176 - 264 V AC
CCT / Tone	4000 K
Colour rendering index	80 Ra
C.C. / C.V.	AC
Safety class	2
IP	IP66
IK	IK10
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	Driver
Dimmable article	No
Directional	Swivelling
total angle (vertical plane)	120 °
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	1 m
Resin potting	Yes
Type of light emission	Single emission
Net weight	0.12 Kg
Electrostatic discharge protection	Yes
Surge protection	0.5 KV
Product technological characteristics	Acquastop

Finishing casing

Material	Die-cast Aluminium EN AB - 46100
Colour	White
Processing	Open pore anodizing + Powder Coating

Finishing diffuser

Material	Extra clear glass - Tempered
Colour	transparent

Finishing bracket

Material	AISI 304 steel
Colour	White
Processing	Powder coating

Cables Electrification

Cable connector	No
-----------------	----




Shaker | Projectors | Accessories
84241N30




Picket - L. 160mm
 installation position: land,Cover material: aisi 304 steel

Code
98624




Picket - L. 102.5mm
 installation position: land,Cover material: aisi 304 steel

Code
98669



Picket - L. 700mm
 installation position: land,Cover material: aisi 304 steel

Code
C-F500002



Picket - L. 1000mm
 installation position: land,Cover material: aisi 304 steel

Code
C-F500003



Anti-glare
 Anti-glare Type: 45° cylindrical screen.
 Material:Aluminium 6026, colour:Black, processing:Open pore anodizing + Powder Coating.

Code
83246