


Shaker



Projectors | x powerLED 0 W DC - 3 W AC | CRI 80
84244W60

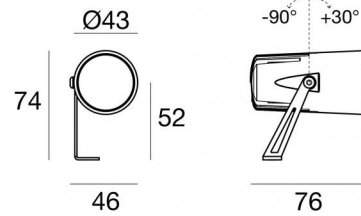

| Technical data | |
|--|----------------------------------|
| Type | Surface |
| Installation position | Wall lights - Ceiling - Floor |
| Installation environment | Outdoor |
| Light Source | LED |
| Circuit structure | powerLED |
| Optics | Wide Flood |
| Light emission direction | frontal |
| Nominal power | 0 W DC |
| Total Power | 3 W |
| Nominal input voltage | 220 - 240 V AC |
| Input voltage range | 176 - 264 V AC |
| CCT / Tone | 3000 K |
| Colour rendering index | 80 Ra |
| C.C. / C.V. | AC |
| Safety class | 2 |
| IP | IP66 |
| IK | IK10 |
| Glow wire test | 850° |
| Direct mounting on normally flammable surfaces | Yes |
| CE | Yes |
| Driver included | Driver |
| Dimmable article | No |
| Directional | Swivelling |
| total angle (vertical plane) | 120 ° |
| Tilting | No |
| Walk-over | No |
| Drive-over | No |
| Cable included | Yes |
| Cable length | 1 m |
| Resin potting | Yes |
| Type of light emission | Single emission |
| Net weight | 0.12 Kg |
| Electrostatic discharge protection | Yes |
| Surge protection | 0.5 KV |
| Product technological characteristics | Acquastop |

Finishing casing

| | |
|------------|--------------------------------------|
| Material | Die-cast Aluminium EN AB - 46100 |
| Colour | Dark brown |
| Processing | Open pore anodizing + Powder Coating |

Finishing diffuser

| | |
|----------|------------------------------|
| Material | Extra clear glass - Tempered |
| Colour | transparent |

Finishing bracket

| | |
|------------|----------------|
| Material | AISI 304 steel |
| Colour | Dark brown |
| Processing | Powder coating |

Cables Electrification

| | |
|-----------------|----|
| Cable connector | No |
|-----------------|----|




Shaker | Projectors | Accessories
84244W60




Picket - L. 160mm
installation position: land,Cover material: aisi 304 steel

Code
98624




Picket - L. 102.5mm
installation position: land,Cover material: aisi 304 steel

Code
98669



Picket - L. 700mm
installation position: land,Cover material: aisi 304 steel

Code
C-F500002



Picket - L. 1000mm
installation position: land,Cover material: aisi 304 steel

Code
C-F500003



Anti-glare
Anti-glare Type: 45° cylindrical screen.
Material:Aluminium 6026, colour:Black, processing:Open pore anodizing + Powder Coating.

Code
83246