


# Shaker



Projectors | arrayLED 0 W DC - 17 W AC | CRI 80  
84528N30

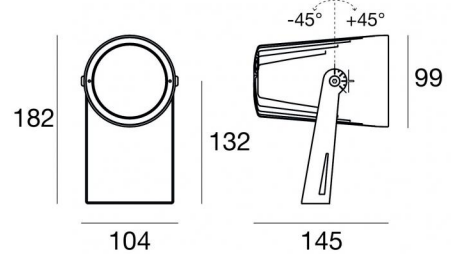

Technical data	
Type	Surface
Installation position	Wall lights - Ceiling - Floor
Installation environment	Outdoor
Light Source	LED
Circuit structure	arrayLED
Optics	Flood
Light emission direction	frontal
Nominal power	0 W DC
Total Power	17 W
Nominal input voltage	220 - 240 V AC
Input voltage range	198 - 264 V AC
CCT / Tone	4000 K
Colour rendering index	80 Ra
C.C. / C.V.	AC
Safety class	1
IP	IP66
IK	IK07
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	Driver
Dimmable article	No
Directional	Swivelling
total angle (vertical plane)	90 °
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	1 m
Resin potting	Yes
Type of light emission	Single emission
Net weight	1.7 Kg
Electrostatic discharge protection	Yes
Surge protection	4 KV
Product technological characteristics	Acquastop

## Finishing casing

Material	Die-cast Aluminium EN AB - 46100
Colour	Black
Processing	Open pore anodizing + Powder Coating

## Finishing diffuser

Material	Extra clear glass - Tempered
Colour	transparent

## Finishing bracket

Material	AISI 304 steel
Colour	Black
Processing	Powder coating

## Cables Electrification

Cable connector	No
-----------------	----



Shaker | Projectors | Accessories  
**84528N30**



Picket  
installation position: land,Cover material: pc

**Code**  
89371



Anti-glare  
Anti-glare Type: 45° cylindrical screen.  
Material:Aluminium 6026, colour:Black, processing:Open pore anodizing + Powder Coating.

**Code**  
99819