


Periskop45



Projectors | x powerLED 0 W DC 500 mA | CRI 80
90520M15

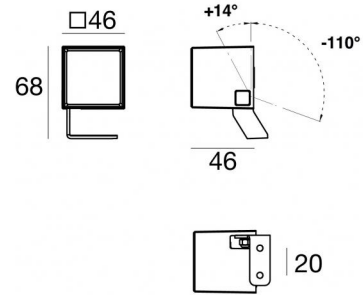

Technical data	
Type	Surface
Installation position	Wall lights - Ceiling - Floor
Installation environment	Outdoor
Light Source	LED
Circuit structure	powerLED
Optics	Spot + Spot + Spot + Spot
Light emission direction	frontal + frontal + frontal + frontal
Nominal power	0 W DC
CCT / Tone	2700 K
Colour rendering index	80 Ra
C.C. / C.V.	CC
Safety class	3
IP	IP66
IK	IK05
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	No
Dimmable article	DALI - 1-10V
Directional	Swivelling
total angle (vertical plane)	124 °
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	1 m
Resin potting	Yes
Type of light emission	Single emission
Net weight	0.2 Kg
Electrostatic discharge protection	No
Surge protection	No
Product technological characteristics	Acquastop - TVS

Finishing casing

Material	Die-cast Aluminium EN AB - 46100
Colour	Black
Processing	Open pore anodizing + Powder Coating

Finishing diffuser

Material	Extra clear glass - Tempered
Colour	transparent
Processing	Silk-screening

Finishing bracket

Material	Aluminium 5754
Colour	Anodised Black
Processing	15 µm Anodizing

Electronics



99185
On/Off Driver 198-264V AC (1 art.)



C-E200007
On/Off Driver 198-264V AC / 180-275V DC (1 art.)


Cables Electrification

Cable connector	No
-----------------	----



Picket - L. 160mm
installation position: land,Cover material: aisi 304 steel

Code
98624




Picket
installation position: land,Cover material: aisi 304 steel

Code
98550




Bag / Fixing kit - Belt for installation on tree

Code
99802



Picket - L. 700mm
installation position: land,Cover material: aisi 304 steel

Code
C-F500002



Picket - L. 1000mm
installation position: land,Cover material: aisi 304 steel

Code
C-F500003