



# Periskop45

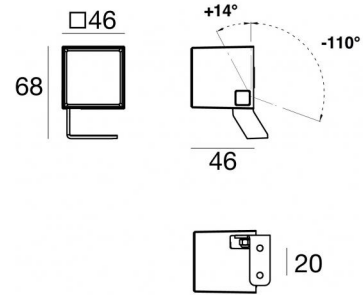

Projectors | x powerLED 0 W DC 500 mA | CRI 80  
90521N15



| Technical data                                 |   |
|--|---|
| Type   | Surface   |
| Installation position                          | Wall lights -<br>Ceiling - Floor                      |
| Installation environment                       | Outdoor   |
| Light Source                                   | LED   |
| Circuit structure                              | powerLED  |
| Optics   | Spot + Spot +<br>Spot + Spot +<br>Spot                |
| Light emission direction                       | frontal + frontal<br>+ frontal + frontal<br>+ frontal |
| Nominal power                                  | 0 W DC  |
| CCT / Tone                                     | 4000 K  |
| Colour rendering index                         | 80 Ra   |
| C.C. / C.V.                                    | CC  |
| Safety class                                   | 3   |
| IP   | IP66  |
| IK   | IK05  |
| Glow wire test                                 | 850°  |
| Direct mounting on normally flammable surfaces | Yes   |
| CE   | Yes   |
| Driver included                                | No  |
| Dimmable article                               | DALI - 1-10V  |
| Directional                                    | Swivelling  |
| total angle (vertical plane)                   | 124 °   |
| Tilting  | No  |
| Walk-over                                      | No  |
| Drive-over                                     | No  |
| Cable included                                 | Yes   |
| Cable length                                   | 1 m   |
| Resin potting                                  | Yes   |
| Type of light emission                         | Single emission                                       |
| Net weight                                     | 0.2 Kg  |
| Electrostatic discharge protection             | No  |
| Surge protection                               | No  |
| Product technological characteristics          | Acquastop - TVS                                       |

## Finishing casing

|            |                                      |
|------------|--------------------------------------|
| Material   | Die-cast Aluminium EN AB - 46100     |
| Colour     | Grey                                 |
| Processing | Open pore anodizing + Powder Coating |

## Finishing diffuser

|            |                              |
|------------|------------------------------|
| Material   | Extra clear glass - Tempered |
| Colour     | transparent                  |
| Processing | Silk-screening               |

## Finishing bracket

|            |                 |
|------------|-----------------|
| Material   | Aluminium 5754  |
| Colour     | Anodised Black  |
| Processing | 15 µm Anodizing |

## Electronics



99185  
On/Off Driver 198-264V AC (1 art.)





C-E200007  
On/Off Driver 198-264V AC / 180-275V DC (1 art.)

## Cables Electrification

|                 |    |
|-----------------|----|
| Cable connector | No |
|-----------------|----|

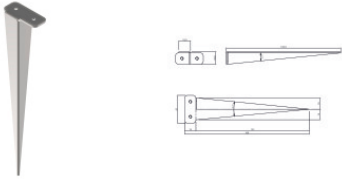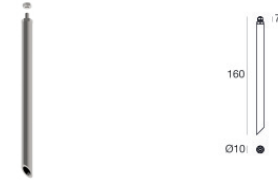

|   |  |   |
|---|--|---|
|    | <p>Picket<br/>installation position: land,Cover material: aisi 304 steel</p>             | <p><b>Code</b><br/><u>98550</u></p>     |
|    | <p>Picket - L. 160mm<br/>installation position: land,Cover material: aisi 304 steel</p>  | <p><b>Code</b><br/><u>98624</u></p>     |
|   | <p>Picket - L. 700mm<br/>installation position: land,Cover material: aisi 304 steel</p>  | <p><b>Code</b><br/><u>C-F500002</u></p> |
|  | <p>Picket - L. 1000mm<br/>installation position: land,Cover material: aisi 304 steel</p> | <p><b>Code</b><br/><u>C-F500003</u></p> |
|   | <p>Bag / Fixing kit - Belt for installation on tree</p>                                  | <p><b>Code</b><br/><u>99802</u></p>     |