




Uplights | 1 x powerLED 1 W DC 350 mA | CRI 80  
92076N15



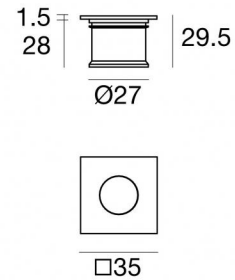


Technical data	
Type	Frame
Installation position	Floor
Installation environment	Outdoor
Light Source	LED
Circuit structure	powerLED
Optics	Spot
Light emission direction	upward
Nominal power	1 W DC
Source lumens	165 lm
Input voltage range	350mA
CCT / Tone	4000 K
Colour rendering index	80 Ra
C.C. / C.V.	CC
Safety class	3
IP	IP66
IK	IK05
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	No
Dimmable article	DALI - 1-10V
Directional	No
Tilting	No
Walk-over	Yes
Drive-over	No
Cable included	Yes
Cable length	1 m
Resin potting	Yes
Type of light emission	Single emission
Net weight	0.066 Kg
Electrostatic discharge protection	No
Surge protection	No

### Finishing casing

Material	Brass
Colour	nickel
Processing	Brushing

### Electronics



## Uplights | 1 x powerLED 1 W DC 350 mA | CRI 80 | Base 92076N15


Single emission uplights for outdoor application. The natural white LED light source with a spot light distribution is composed of 1 powerLEDs with CCT of 4000 K and a CRI 80; the source luminous flux is 165 lm, with a 165.0 lm/W nominal luminous efficacy.

The device body is made of brass and features a nickel finish, processed by means of brushing. The ingress protection degree is IP66; the total weight is of 0.066 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 1 W. The power supply cable is included and features a 1 m length.

The device features protection class III and can be floor-mounted, with a 29 mm diameter hole (in plasterboard) with an outer casing, code 84915 (for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

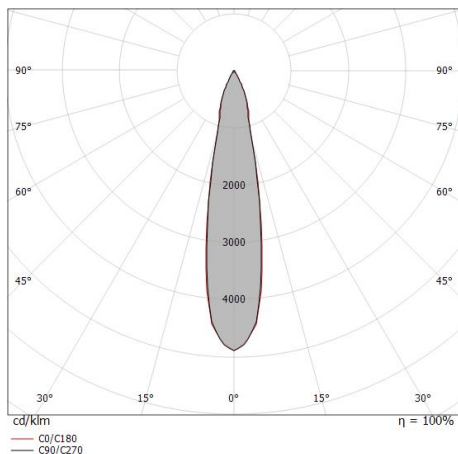

Distance [m]	Cone diameter [m]	illuminance [lx]
0.5	0.19 0.19	E(0°) 1756 E(C90) 843 E(C0) 837
1.0	0.37 0.38	E(0°) 439 E(C90) 211 E(C0) 209
1.5	0.56 0.57	E(0°) 195 E(C90) 94 E(C0) 93
2.0	0.75 0.76	E(0°) 110 E(C90) 53 E(C0) 52
2.5	0.94 0.94	E(0°) 70 E(C90) 34 E(C0) 33
3.0	1.12 1.13	E(0°) 49 E(C90) 23 E(C0) 23

— C0/C180 (Half-peak divergence: 21.4°)  
— C90/C270 (Half-peak divergence: 21.2°)

### Energy efficiency class

This product contains a light source of energy efficiency class D.

### Illuminotechnical Features

Light Output Ratio (LOR)	54 %
Source lumens	165 lm
Delivered lumens	90 lm
Consumption	1,0 W
Luminaire efficacy	90 lm/W
Colour temperature	4000 K
Standard Deviation of Colour Matching	1.5 Step
Colour rendering index	80 Ra

Standard Operating Ambient Temperature	-20 / +50°C
Ordinary temperature on the glass	40°C

### LED Life / Failure Ratio

L70 B10 C0 361980h (at Tj 60 Ta 25)

### UGR

UGR axial	19.5
UGR transversal	19.5
X=4H   Y=8H	S=0.25H
Reflection factor	70/50/20

### OPTICAL

C0/C180 optics	21°
Light distribution simmetry	Symmetrical



Beret\_Q | Uplights | Accessories  
**92076N15**



Outer casing

installation position: wall lights; type of installation: masonry L=49mm, H=60mm, D=60mm.

Material:ABS Plastic, colour:black.

**Code**

84915



Outer casing

installation position: ceiling; type of installation: masonry L=42mm, H=35mm, D=35mm.

Material:ABS Plastic, colour:black.

**Code**

84336