




Lines | 85-277 V  
12 x powerLEDs 13.2 W DC - 14.5 W AC | RGBW - 4000  
**92083Q27**

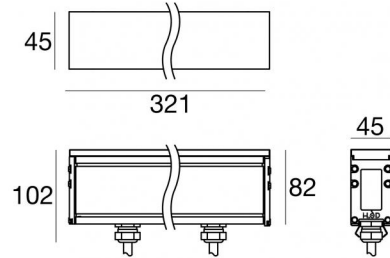

| Technical data                                 |                       |
|------------------------------------------------|-----------------------|
| Type                                           | Frameless             |
| Installation position                          | Floor                 |
| Installation environment                       | Outdoor               |
| Light Source                                   | LED                   |
| Circuit structure                              | powerLEDs             |
| Optics                                         | Asymmetric Wallwasher |
| Light emission direction                       | upward                |
| Nominal power                                  | 13.2 W DC             |
| Total Power                                    | 14.5 W                |
| Input voltage range                            | 85 - 277 V AC         |
| Frequency                                      | 50 - 60 Hz            |
| CCT / Tone                                     | RGBW - 4000 K         |
| C.C. / C.V.                                    | AC                    |
| Safety class                                   | 1                     |
| IP                                             | IP67                  |
| IK                                             | IK10                  |
| Glow wire test                                 | 850°                  |
| Direct mounting on normally flammable surfaces | Yes                   |
| CE                                             | Yes                   |
| Driver included                                | Control unit/Driver   |
| Dimmable article                               | DMX-RDM               |
| Directional                                    | No                    |
| Tilting                                        | No                    |
| Walk-over                                      | Yes                   |
| Drive-over                                     | 5000 Kg               |
| Cable included                                 | Yes                   |
| Cable length                                   | 0.2 m                 |
| Resin potting                                  | No                    |
| Type of light emission                         | Single emission       |
| Net weight                                     | 1.5 Kg                |
| Electrostatic discharge protection             | Yes                   |
| Surge protection                               | 6 KV                  |
| Product technological characteristics          | Acquastop - TVS       |

### Finishing casing

|            |                 |
|------------|-----------------|
| Material   | Aluminium 6060  |
| Colour     | Anodised Black  |
| Processing | 15 µm Anodizing |

### Finishing diffuser

|            |                              |
|------------|------------------------------|
| Material   | Extra clear glass - Tempered |
| Colour     | transparent                  |
| Processing | Silk-screening               |

### Cables Electrification+signal

|                       |                              |
|-----------------------|------------------------------|
| Cable connector       | AllinONE Male Plug 6 Pin     |
| IP (locked condition) | 67                           |
| Cable connector       | ALLinONE Female Socket 6 Pin |

### Lumen RGBW

| N. Led | Red    | Green  | Blue   | white  |
|--------|--------|--------|--------|--------|
| 12     | 177 lm | 291 lm | 105 lm | 495 lm |



Lines | 85-277 V | 12 x powerLEDs 13.2 W DC - 14.5 W AC | RGBW - 4000  
**92083Q27**

#### Energy efficiency class

This product contains 3 light sources of energy efficiency class D.

#### Illuminotecnical Features

|                        |       |
|------------------------|-------|
| Colour rendering index | 80 Ra |
|------------------------|-------|

|                                        |             |
|----------------------------------------|-------------|
| Standard Operating Ambient Temperature | -20 / +50°C |
|----------------------------------------|-------------|

|                                   |      |
|-----------------------------------|------|
| Ordinary temperature on the glass | 40°C |
|-----------------------------------|------|

#### LED Life / Failure Ratio

L70 B10 C0 247450h

Single emission lines for outdoor application. The RGBW - 4000 K LED light source with a asymmetric wallwasher light distribution is composed of 12 powerled LEDs with CCT of RGB-W 4000 K.

The device body is made of aluminium 6060 and features a anodised black finish, processed by means of 15 µm anodizing; the diffuser is made of extra clear glass - tempered with a silk-screening treatment. The ingress protection degree is IP67; the total weight is of 1.5 kg.

The total absorbed power is 13.2 W. The power supply cable is included and features a 0.2 m length.

The device features protection class I and can be floor-mounted with an outer casing, code 98724(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.



|                     |  |                                                                                                                                                                                                                                                 |                            |                                               |
|---------------------|--|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|-----------------------------------------------|
|                     |  | <p>Outer casing<br/>                 installation position: floor; type of installation: masonry L=320mm, H=140mm, D=75mm.<br/>                 Material:Aluminium 6060, colour:Anodised Black, processing:15 µm Anodizing.</p>                 | <p><b>Finish</b><br/> </p> | <p><b>Code</b><br/>                 98724</p> |
|                     |  | <p>Key</p>                                                                                                                                                                                                                                      |                            | <p><b>Code</b><br/>                 98957</p> |
| <p><b>L. 1m</b></p> |  | <p>Cable and connector<br/>                 Type of cable power + signal cable allinone; Length 1000 mm; insulation double with shielding for signal; external diameter: 12.6 mm; colors: white - blue - red - grey - brown - yellow-green.</p> |                            | <p><b>Code</b><br/>                 98660</p> |
| <p><b>L. 5m</b></p> |  | <p>Cable and connector<br/>                 Type of cable power + signal cable allinone; Length 5000 mm; insulation double with shielding for signal; external diameter: 12.6 mm; colors: white - blue - red - grey - brown - yellow-green.</p> |                            | <p><b>Code</b><br/>                 98661</p> |
| <p><b>L. 1m</b></p> |  | <p>Cable and connector<br/>                 Type of cable power + signal cable allinone; Length 1000 mm; insulation double with shielding for signal; external diameter: 12.6 mm.</p>                                                           |                            | <p><b>Code</b><br/>                 98662</p> |
| <p><b>L. 5m</b></p> |  | <p>Cable and connector<br/>                 Type of cable power + signal cable allinone; Length 5000 mm; insulation double with shielding for signal; external diameter: 12.6 mm.</p>                                                           |                            | <p><b>Code</b><br/>                 98663</p> |
|                     |  | <p>Connector - Start splitter<br/>                 Type of cable power + signal cable allinone; Length 5000 + 5000 + 200 mm; insulation double with shielding for signal.</p>                                                                   |                            | <p><b>Code</b><br/>                 98985</p> |
|                     |  | <p>Connector - Continuity splitter<br/>                 Type of cable power + signal cable allinone; Length 200 + 200 + 5000 mm; insulation double with shielding for signal.</p>                                                               |                            | <p><b>Code</b><br/>                 99390</p> |



Connector - DMX line closure adapter for ALLinONE cables

Type of cable power + signal cable allinone; ; insulation double with shielding for signal.

**Code**

98986