




Lines | 85-277 V  
12 x powerLEDs 13.2 W DC - 14.5 W AC | RGBW - 3000  
**92083V27**

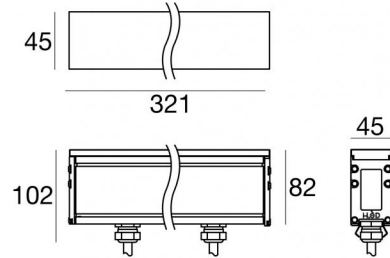

Technical data	
Type	Frameless
Installation position	Floor
Installation environment	Outdoor
Light Source	LED
Circuit structure	powerLEDs
Optics	Asymmetric Wallwasher
Light emission direction	upward
Nominal power	13.2 W DC
Total Power	14.5 W
Input voltage range	85 - 277 V AC
Frequency	50 - 60 Hz
CCT / Tone	RGBW - 3000 K
C.C. / C.V.	AC
Safety class	1
IP	IP67
IK	IK10
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	Control unit/Driver
Dimmable article	DMX-RDM
Directional	No
Tilting	No
Walk-over	Yes
Drive-over	5000 Kg
Cable included	Yes
Cable length	0.2 m
Resin potting	No
Type of light emission	Single emission
Net weight	1.5 Kg
Electrostatic discharge protection	Yes
Surge protection	6 KV
Product technological characteristics	Acquastop - TVS

### Finishing casing

Material	Aluminium 6060
Colour	Anodised Black
Processing	15 µm Anodizing

### Finishing diffuser

Material	Extra clear glass - Tempered
Colour	transparent
Processing	Silk-screening

### Cables Electrification+signal

Cable connector	AllinONE Male Plug 6 Pin
IP (locked condition)	67
Cable connector	ALLinONE Female Socket 6 Pin

### Lumen RGBW

N. Led	Red	Green	Blue	white
12	177 lm	291 lm	105 lm	462 lm



Lines | 85-277 V | 12 x powerLEDs 13.2 W DC - 14.5 W AC | RGBW - 3000  
**92083V27**

#### Energy efficiency class

This product contains 3 light sources of energy efficiency class D.

#### Illuminotecnical Features

Colour rendering index 80 Ra

Standard Operating Ambient Temperature -20 / +50°C

Ordinary temperature on the glass 40°C

#### LED Life / Failure Ratio

L70 B10 C0 247450h

Single emission lines for outdoor application. The RGBW - 3000 K LED light source with a asymmetric wallwasher light distribution is composed of 12 powerled LEDs with CCT of RGB-W 3000 K.

The device body is made of aluminium 6060 and features a anodised black finish, processed by means of 15 µm anodizing; the diffuser is made of extra clear glass - tempered with a silk-screening treatment. The ingress protection degree is IP67; the total weight is of 1.5 kg.

The total absorbed power is 13.2 W. The power supply cable is included and features a 0.2 m length.

The device features protection class I and can be floor-mounted with an outer casing, code 98724(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.



		<p>Outer casing                  installation position: floor; type of installation: masonry L=320mm, H=140mm, D=75mm.                  Material:Aluminium 6060, colour:Anodised Black, processing:15 µm Anodizing.</p>	<p><b>Finish</b>    <b>Code</b>                  98724</p>
		<p>Key</p>	<p><b>Code</b>                  98957</p>
<p><b>L. 1m</b></p>		<p>Cable and connector                  Type of cable power + signal cable allinone; Length 1000 mm; insulation double with shielding for signal; external diameter: 12.6 mm; colors: white - blue - red - grey - brown - yellow-green.</p>	<p><b>Code</b>                  98660</p>
<p><b>L. 5m</b></p>		<p>Cable and connector                  Type of cable power + signal cable allinone; Length 5000 mm; insulation double with shielding for signal; external diameter: 12.6 mm; colors: white - blue - red - grey - brown - yellow-green.</p>	<p><b>Code</b>                  98661</p>
<p><b>L. 1m</b></p>		<p>Cable and connector                  Type of cable power + signal cable allinone; Length 1000 mm; insulation double with shielding for signal; external diameter: 12.6 mm.</p>	<p><b>Code</b>                  98662</p>
<p><b>L. 5m</b></p>		<p>Cable and connector                  Type of cable power + signal cable allinone; Length 5000 mm; insulation double with shielding for signal; external diameter: 12.6 mm.</p>	<p><b>Code</b>                  98663</p>
		<p>Connector - Start splitter                  Type of cable power + signal cable allinone; Length 5000 + 5000 + 200 mm; insulation double with shielding for signal.</p>	<p><b>Code</b>                  98985</p>
		<p>Connector - Continuity splitter                  Type of cable power + signal cable allinone; Length 200 + 200 + 5000 mm; insulation double with shielding for signal.</p>	<p><b>Code</b>                  99390</p>



Archiline\_F | Lines | Accessories  
**92083V27**



Connector - DMX line closure adapter for ALLinONE cables  
Type of cable power + signal cable allinone; ; insulation double with shielding for signal.

**Code**

98986