




Lines | 220-240 V
20 x powerLEDs 22.04 W DC - 24.5 W AC | RGBW - 4000
92084Q25

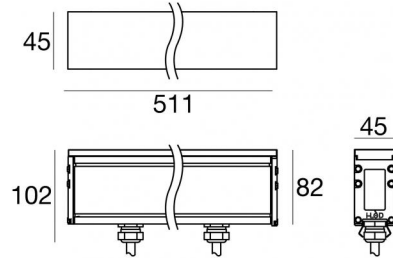

Technical data	
Type	Frameless
Installation position	Floor
Installation environment	Outdoor
Light Source	LED
Circuit structure	powerLEDs
Optics	Elliptical
Light emission direction	upward
Nominal power	22.04 W DC
Total Power	24.5 W
Input voltage range	220 - 240 V AC
Frequency	50 - 60 Hz
CCT / Tone	RGBW - 4000 K
C.C. / C.V.	AC
Safety class	1
IP	IP67
IK	IK10
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	Control unit/Driver
Dimmable article	DMX-RDM
Directional	No
Tilting	No
Walk-over	Yes
Drive-over	5000 Kg
Cable included	Yes
Cable length	0.2 m
Resin potting	No
Type of light emission	Single emission
Net weight	2.8 Kg
Electrostatic discharge protection	Yes
Surge protection	6 KV
Product technological characteristics	Acquastop - TVS

Finishing casing

Material	Aluminium 6060
Colour	Anodised Black
Processing	15 µm Anodizing

Finishing diffuser

Material	Extra clear glass - Tempered
Colour	transparent
Processing	Silk-screening

Lumen RGBW

N. Led	Red	Green	Blue	white
20	295 lm	475 lm	175 lm	825 lm



Lines | 220-240 V | 20 x powerLEDs 22.04 W DC - 24.5 W AC | RGBW - 4000
92084Q25

Energy efficiency class

This product contains 5 light sources of energy efficiency class D.

Illuminotecnical Features

Colour rendering index	80 Ra
------------------------	-------

Standard Operating Ambient Temperature	-20 / +50°C
--	-------------

Ordinary temperature on the glass	40°C
-----------------------------------	------

LED Life / Failure Ratio

L70 B10 C0 247450h

Single emission lines for outdoor application. The RGBW - 4000 K LED light source with a elliptical light distribution is composed of 20 powered LEDs with CCT of RGB-W 4000 K.













The device body is made of aluminium 6060 and features a anodised black finish, processed by means of 15 µm anodizing; the diffuser is made of extra clear glass - tempered with a silk-screening treatment. The ingress protection degree is IP67; the total weight is of 2.8 kg.

The total absorbed power is 22.04 W. The power supply cable is included and features a 0.2 m length.

The device features protection class I and can be floor-mounted with an outer casing, code 98725(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.



		<p>Outer casing installation position: floor; type of installation: masonry L=511mm, H=140mm, D=75mm. Material:Aluminium 6060, colour:Anodised Black, processing:15 µm Anodizing.</p>	<p>Finish </p> <p>Code 98725</p>
<p>L. 1m</p> 		<p>Cable and connector Type of cable power + signal cable allinone; Length 1000 mm; insulation double with shielding for signal; external diameter: 12.6 mm; colors: white - blue - red - grey - brown - yellow-green.</p>	<p>Code 98660</p>
<p>L. 5m</p> 		<p>Cable and connector Type of cable power + signal cable allinone; Length 5000 mm; insulation double with shielding for signal; external diameter: 12.6 mm; colors: white - blue - red - grey - brown - yellow-green.</p>	<p>Code 98661</p>
<p>L. 1m</p> 		<p>Cable and connector Type of cable power + signal cable allinone; Length 1000 mm; insulation double with shielding for signal; external diameter: 12.6 mm.</p>	<p>Code 98662</p>
<p>L. 5m</p> 		<p>Cable and connector Type of cable power + signal cable allinone; Length 5000 mm; insulation double with shielding for signal; external diameter: 12.6 mm.</p>	<p>Code 98663</p>
		<p>Key</p>	<p>Code 98957</p>
		<p>Connector - Start splitter Type of cable power + signal cable allinone; Length 5000 + 5000 + 200 mm; insulation double with shielding for signal.</p>	<p>Code 98985</p>
		<p>Connector - Continuity splitter Type of cable power + signal cable allinone; Length 200 + 200 + 5000 mm; insulation double with shielding for signal.</p>	<p>Code 99390</p>



Archiline_F | Lines | Accessories
92084Q25



Connector - DMX line closure adapter for ALLinONE cables
Type of cable power + signal cable allinone; ; insulation double with shielding for signal.

Code

98986