




Lines | 85-277 V | 48 topLED 13.6 W DC - 16 W AC
 RGBW - 4000
92144Q00

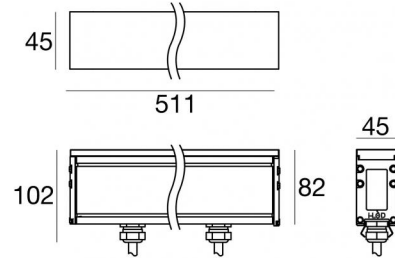

Technical data	
Type	Frameless
Installation position	Floor
Installation environment	Outdoor
Light Source	LED
Circuit structure	topLED
Optics	Diffused
Light emission direction	upward
Nominal power	13.6 W DC
Total Power	16 W
Input voltage range	85 - 277 V AC
Frequency	50 - 60 Hz
CCT / Tone	RGBW - 4000 K
C.C. / C.V.	AC
Safety class	1
IP	IP67
IK	IK10
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	Control unit/Driver
Dimmable article	DMX-RDM
Directional	No
Tilting	No
Walk-over	Yes
Drive-over	5000 Kg
Cable included	Yes
Cable length	0.20 m
Resin potting	No
Type of light emission	Single emission
Net weight	2.8 Kg
Electrostatic discharge protection	Yes
Surge protection	6 KV
Optics technology	Dot free
Product technological characteristics	Acquastop

Finishing casing

Material	Aluminium 6060
Colour	Anodised Black
Processing	15 µm Anodizing

Finishing diffuser

Material	Glass - Tempered
Colour	Opal white
Processing	Anti-slip painting

Lumen RGBW

N. Led	Red	Green	Blue	white
48	144 lm	192 lm	96 lm	336 lm



Lines | 85-277 V | 48 topLED 13.6 W DC - 16 W AC | RGBW - 4000
92144Q00

Standard Operating Ambient Temperature	-20 / +50°C
Ordinary temperature on the glass	40°C

LED Life / Failure Ratio

Single emission lines for outdoor application. The RGBW - 4000 K LED light source with a diffused light distribution is composed of 48 topLED LEDs with CCT of RGB-W 4000 K.

The device body is made of aluminium 6060 and features a anodised black finish, processed by means of 15 µm anodizing; the diffuser is made of glass - tempered with a anti-slip painting treatment. The ingress protection degree is IP67; the total weight is of 2.8 kg.

The total absorbed power is 13.6 W. The power supply cable is included and features a 0.20 m length.

The device features protection class I and can be floor-mounted with an outer casing, code 98725(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.



		<p>Outer casing installation position: floor; type of installation: masonry L=511mm, H=140mm, D=75mm. Material:Aluminium 6060, colour:Anodised Black, processing:15 µm Anodizing.</p>	<p>Finish Code <u>98725</u></p>
<p>L. 1m</p>		<p>Cable and connector Type of cable power + signal cable allinone; Length 1000 mm; insulation double with shielding for signal; external diameter: 12.6 mm; colors: white - blue - red - grey - brown - yellow-green.</p>	<p>Code <u>98660</u></p>
<p>L. 5m</p>		<p>Cable and connector Type of cable power + signal cable allinone; Length 5000 mm; insulation double with shielding for signal; external diameter: 12.6 mm; colors: white - blue - red - grey - brown - yellow-green.</p>	<p>Code <u>98661</u></p>
<p>L. 1m</p>		<p>Cable and connector Type of cable power + signal cable allinone; Length 1000 mm; insulation double with shielding for signal; external diameter: 12.6 mm.</p>	<p>Code <u>98662</u></p>
<p>L. 5m</p>		<p>Cable and connector Type of cable power + signal cable allinone; Length 5000 mm; insulation double with shielding for signal; external diameter: 12.6 mm.</p>	<p>Code <u>98663</u></p>
		<p>Key</p>	<p>Code <u>98957</u></p>
		<p>Connector - Start splitter Type of cable power + signal cable allinone; Length 5000 + 5000 + 200 mm; insulation double with shielding for signal.</p>	<p>Code <u>98985</u></p>
		<p>Connector - Continuity splitter Type of cable power + signal cable allinone; Length 200 + 200 + 5000 mm; insulation double with shielding for signal.</p>	<p>Code <u>99390</u></p>



Archiline_FL | Lines | Accessories

92144Q00



Connector - DMX line closure adapter for ALLinONE cables

Type of cable power + signal cable allinone; ; insulation double with shielding for signal.

Code

98986