


Maxi Tube



Lines | 198-264 V | 36 topLED 13 W DC - 14.5 W AC
CRI 92
92245W30



Technical data	
Type	Surface - -
Installation position	Wall lights - Ceiling
Installation environment	Outdoor
Light Source	LED
Circuit structure	topLED
Optics	Extra Wide Flood
Nominal power	13 W DC
Total Power	14.5 W
Source lumens	1440 lm
Nominal input voltage	220 - 240 V AC
Input voltage range	198 - 264 V AC
Frequency	50 - 60 Hz
CCT / Tone	3000 K
Colour rendering index	92 Ra
C.C. / C.V.	AC
Safety class	2
IP	IP67
IK	IK08
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	Driver
Dimmable article	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	1 m
Resin potting	No
Type of light emission	Single emission
Net weight	0.5 Kg
Electrostatic discharge protection	Yes
Surge protection	Yes

Finishing casing	
Material	UV Resistant Polycarbonate
Colour	opaline

Finishing diffuser	
Material	UV Resistant Polycarbonate
Colour	opaline

Maxi Tube



Lines | 198-264 V | 36 topLED 13 W DC - 14.5 W AC | CRI 92 | Base
92245W30

Single emission lines for outdoor application. The warm white LED light source with a extra wide flood light distribution is composed of 36 topLED LEDs with CCT of 3000 K and a CRI 92; the source luminous flux is 1440 lm, with a 110.8 lm/W nominal luminous efficacy.

The device body is made of uv resistant polycarbonate and features a opaline finish; the diffuser is made of uv resistant polycarbonate. The ingress protection degree is IP67; the total weight is of 0.5 kg.

The total absorbed power is 14.5 W. The power supply cable is included and features a 1 m length.

The device features protection class II and can be wall lights or ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Energy efficiency class

This product contains 3 light sources of energy efficiency class E.

Illuminotechnical Features

Light Output Ratio (LOR)	80 %
Source lumens	1440 lm
Delivered lumens	1154 lm
Consumption	14.5 W
Luminaire efficacy	79 lm/W
Colour temperature	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	92 Ra


Standard Operating Ambient Temperature	-20 / +50°C
Ordinary temperature on the glass	35°C

LED Life / Failure Ratio

L70 B10 C0 145770h (at Tj 65 Ta 25)

OPTICAL

C90/C270 optics	80°
C0/C180 optics	97°
Light distribution symmetry	Symmetrical 2 axis

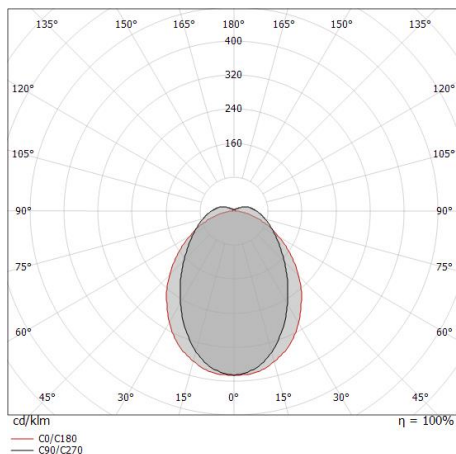

Maxi Tube



Maxi Tube | Industrial Lighting | Accessories
92245W30



Bag / Fixing kit

Code
99226



Bag / Fixing kit

Code
99227

1x



Bag / Fixing kit

Code
98695



Connector - Quick connector ON-OFF socket / plug IP68 (2 poles)
Type of cable power cable; ; insulation single; section 1 mm²; cable gland: yes.

Code
98729



Cable
Type of cable power cable; ; insulation single; section 1 mm²; cable gland: pg7; colors: blue
- brown.

Code
99229