




Wall Lights | 1 x powerLED 1 W DC 350 mA | CRI 80
92262C00



29





Technical data	
Type	Semi-recessed - -
Installation position	Wall lights
Installation environment	Outdoor
Light Source	LED
Circuit structure	powerLED
Optics	Diffused
Light emission direction	frontal
Nominal power	1 W DC
Source lumens	165 lm
Input voltage range	350mA
CCT / Tone	5000 K
Colour rendering index	80 Ra
C.C. / C.V.	CC
Safety class	3
IP	IP65
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	No
Dimmable article	DALI - 1-10V
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	1 m
Resin potting	Yes
Type of light emission	Single emission
Net weight	0.085 Kg
Electrostatic discharge protection	No
Surge protection	No
Product technological characteristics	Acquastop - TVS

Finishing casing	
Material	OT58 brass
Colour	nickel

Finishing diffuser	
Material	UV Resistant Polycarbonate
Colour	Opal white

Electronics

 89421
On/Off Driver 198~264V AC / 176~275V DC (1 - 6 art.)

 89419
On/Off Driver 198~264V AC / 176~275V DC (1 - 2 art.)

 C-E200004
Push and Simply Dim - DALI-2 Controller (1 - 12 art.)

Cables Electrification	
Cable connector	No



Wall Lights | 1 x powerLED 1 W DC 350 mA | CRI 80 | Base
92262C00

Single emission wall lights for outdoor application. The cold white LED light source with a diffused light distribution is composed of 1 powered LEDs with CCT of 5000 K and a CRI 80; the source luminous flux is 165 lm, with a 165.0 lm/W nominal luminous efficacy.

The device body is made of ot58 brass and features a nickel finish; the diffuser is made of uv resistant polycarbonate. The ingress protection degree is IP65; the total weight is of 0.085 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 1 W. The power supply cable is included and features a 1 m length.

The device features protection class III and can be wall lights-mounted, with a 29 mm diameter hole (in plasterboard) with an outer casing, code 84915(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

Energy efficiency class

This product contains a light source of energy efficiency class D.

Illuminotechnical Features

Light Output Ratio (LOR)	62 %
Source lumens	165 lm
Delivered lumens	103 lm
Consumption	1,0 W
Luminaire efficacy	103 lm/W
Colour temperature	5000 K
Standard Deviation of Colour Matching	1/16 ANSI BIN
Colour rendering index	80 Ra


Standard Operating Ambient Temperature	-20 / +50°C
Ordinary temperature on the glass	40°C

LED Life / Failure Ratio

L70 B10 C0 361980h (at Tj 60 Ta 25)

OPTICAL

C0/C180 optics	180°
Light distribution symmetry	Symmetrical

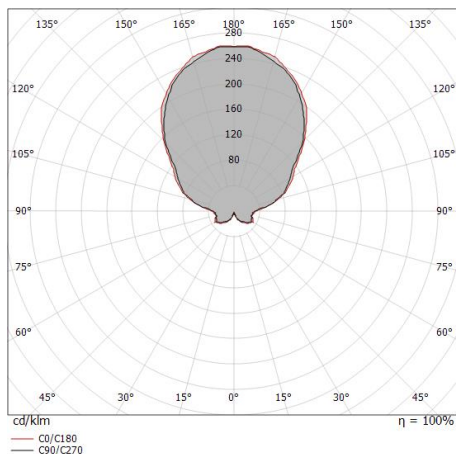



Outer casing

installation position: ceiling; type of installation: masonry L=42mm, H=35mm, D=35mm.

Material:ABS Plastic, colour:black.

Code

84336



Outer casing

installation position: wall lights; type of installation: masonry L=49mm, H=60mm, D=60mm.

Material:ABS Plastic, colour:black.

Code

84915