




Wall Lights | 2 x powerLED 2 W DC 350 mA | CRI 80  
**92283W70**



29



| Technical data                                 |                     |
|--|---------------------|
| Type   | Semi-recessed - -   |
| Installation position                          | Wall lights         |
| Installation environment                       | Outdoor             |
| Light Source                                   | LED                 |
| Circuit structure                              | powerLED            |
| Optics   | Double Wide Flood   |
| Light emission direction                       | downward and upward |
| Nominal power                                  | 2 W DC              |
| Source lumens                                  | 290 lm              |
| Input voltage range                            | 350mA               |
| CCT / Tone                                     | 3000 K              |
| Colour rendering index                         | 80 Ra               |
| C.C. / C.V.                                    | CC                  |
| Safety class                                   | 3                   |
| IP   | IP66                |
| Glow wire test                                 | 850°                |
| Direct mounting on normally flammable surfaces | Yes                 |
| CE   | Yes                 |
| Driver included                                | No                  |
| Dimmable article                               | DALI - 1-10V        |
| Directional                                    | No                  |
| Tilting  | No                  |
| Walk-over                                      | No                  |
| Drive-over                                     | No                  |
| Cable included                                 | Yes                 |
| Cable length                                   | 1 m                 |
| Resin potting                                  | Yes                 |
| Type of light emission                         | Double emission     |
| Net weight                                     | 0.108 Kg            |
| Electrostatic discharge protection             | No                  |
| Surge protection                               | No                  |

| Finishing casing |                      |
|------------------|----------------------|
| Material         | Stainless steel 316L |
| Colour           | steel                |
| Processing       | Brushing             |

### Electronics



89421  
 On/Off Driver 198~264V AC / 176~275V DC (1 - 3 art.)



89419  
 On/Off Driver 198~264V AC / 176~275V DC (1 art.)



C-E200006  
 On/Off Driver 198~264V AC / 180~275V DC (1 - 6 art.)

## Wall Lights | 2 x powerLED 2 W DC 350 mA | CRI 80 | Base 92283W70

Double emission wall lights for outdoor application. The warm white LED light source with a double wide flood light distribution is composed of 2 powerLEDs with CCT of 3000 K and a CRI 80; the source luminous flux is 290 lm, with a 145.0 lm/W nominal luminous efficacy.

The device body is made of stainless steel and features a steel finish, processed by means of brushing. The ingress protection degree is IP66; the total weight is of 0.108 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 2 W. The power supply cable is included and features a 1 m length.

The device features protection class III and can be wall lights-mounted, with a 29 mm diameter hole (in plasterboard) with an outer casing, code 84915(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

### Energy efficiency class

This product contains 2 light sources of energy efficiency class D.

### Illuminotechnical Features

|                                       |          |
|---------------------------------------|----------|
| Light Output Ratio (LOR)              | 46 %     |
| Source lumens                         | 290 lm   |
| Delivered lumens                      | 135 lm   |
| Consumption                           | 2,0 W    |
| Luminaire efficacy                    | 67 lm/W  |
| Colour temperature                    | 3000 K   |
| Standard Deviation of Colour Matching | 1.5 Step |
| Colour rendering index                | 80 Ra    |


|  |             |
|--|-------------|
| Standard Operating Ambient Temperature | -20 / +50°C |
| Ordinary temperature on the glass      | 40°C        |

### LED Life / Failure Ratio

L70 B10 C0 361980h (at Tj 60 Ta 25 )

### OPTICAL

|                             |              |
|-----------------------------|--------------|
| C90/C270 optics             | 92°          |
| Light distribution symmetry | Asymmetrical |

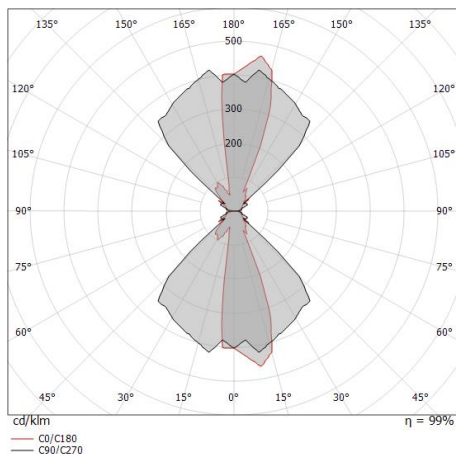



Outer casing

installation position: ceiling; type of installation: masonry L=42mm, H=35mm, D=35mm.  
Material:ABS Plastic, colour:black.

**Code**

84336



Outer casing

installation position: wall lights; type of installation: masonry L=49mm, H=60mm, D=60mm.  
Material:ABS Plastic, colour:black.

**Code**

84915