




Uplights | 1 x powerLED 2 W DC 630 mA | CRI 80  
93138N12



Technical data	
Type	Frame
Installation position	Floor
Installation environment	Outdoor
Light Source	LED
Circuit structure	powerLED
Optics	Extra Wide Flood
Nominal power	2 W DC
Source lumens	249 lm
Input voltage range	630mA
CCT / Tone	4000 K
Colour rendering index	80 Ra
C.C. / C.V.	CC
Safety class	3
IP	IP67
IK	IK05
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	No
Dimmable article	DALI - 1-10V
Directional	No
Tilting	No
Walk-over	Yes
Drive-over	No
Cable included	Yes
Cable length	1 m
Resin potting	Yes
Type of light emission	Single emission
Net weight	0.180 Kg
Electrostatic discharge protection	No
Surge protection	No

### Finishing casing

Material	Brass
Colour	chrome
Processing	Electroplating

### Electronics



89420  
On/Off Driver 198~264V AC / 176~275V DC (1 - 2 art.)



99186  
On/Off Driver 198~264V AC (6 - 12 art.)



C-E200008  
On/Off Driver 198~264V AC / 180~275V DC (3 - 6 art.)



Uplights | 1 x powerLED 2 W DC 630 mA | CRI 80 | Base 93138N12

Single emission uplights for outdoor application. The natural white LED light source with a extra wide flood light distribution is composed of 1 powerLEDs with CCT of 4000 K and a CRI 80; the source luminous flux is 249 lm, with a 124.5 lm/W nominal luminous efficacy.

The device body is made of brass and features a chrome finish, processed by means of electroplating. The ingress protection degree is IP67; the total weight is of 0.180 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 2 W. The power supply cable is included and features a 1 m length.

The device features protection class III and can be floor-mounted with an outer casing, code 84918(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

### Energy efficiency class

This product contains a light source of energy efficiency class D.

### Illuminotechnical Features

Light Output Ratio (LOR)	63 %
Source lumens	249 lm
Delivered lumens	158 lm
Consumption	2,0 W
Luminaire efficacy	79 lm/W
Colour temperature	4000 K
Standard Deviation of Colour Matching	1.5 Step
Colour rendering index	80 Ra
Standard Operating Ambient Temperature	-20 / +50°C
Ordinary temperature on the glass	40°C

### LED Life / Failure Ratio


L70 B10 C0 361980h (at Tj 60 Ta 25 )

### UGR

UGR axial	28
UGR transversal	27.8
X=4H   Y=8H	S=0.25H
Reflection factor	70/50/20

### OPTICAL

C0/C180 optics	89°
Light distribution simmetry	Symmetrical

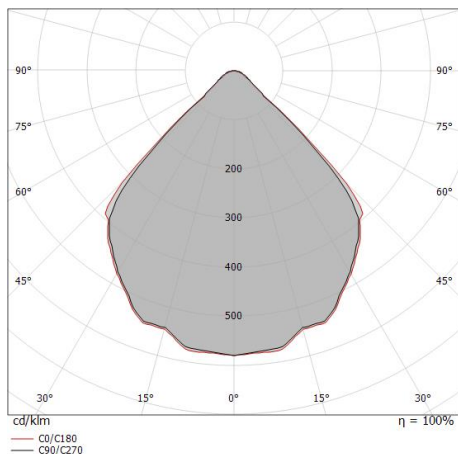

Distance [m]	Cone diameter [m]	E(0°)	E(C90)	E(C0)
0.5	0.98 1.02	366	67	63
1.0	1.96 2.04	91	17	16
1.5	2.94 3.06	41	7	7
2.0	3.92 4.08	23	4	4
2.5	4.90 5.11	15	3	3
3.0	5.88 6.13	10	2	2

Distance [m]      Cone diameter [m]      Illuminance [lx]

— C0/C180 (Half-peak divergence: 91.2°)  
— C90/C270 (Half-peak divergence: 88.8°)



Beret\_2Q | Uplights | Accessories  
**93138N12**

Springs for recessing

**Code**

LED-MOL008ACC



Outer casing

installation position: floor, land; type of installation: masonry L=87mm, H=60mm, D=60mm.

Material:ABS Plastic, colour:black.

**Code**

84918