




Lines | topLED 0 W DC | CRI 80  
94110N00

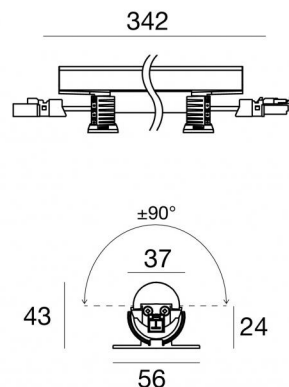

Technical data	
Type	Surface
Installation position	Wall lights - Ceiling - Floor
Installation environment	Indoor
Light Source	LED
Circuit structure	topLED
Optics	Diffused
Light emission direction	upward
Nominal power	0 W DC
CCT / Tone	4000 K
Colour rendering index	80 Ra
C.C. / C.V.	CV
Safety class	3
IP	IP40
IK	IK08
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	No
Dimmable article	DALI - 1-10V
Directional	Swivelling
total angle (vertical plane)	180 °
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	0.02 m
Resin potting	No
Type of light emission	Single emission
Net weight	0.191 Kg
Electrostatic discharge protection	No
Surge protection	No
Product technological characteristics	UV Resistant

### Finishing casing

Material	Aluminium 6060
Colour	Anodised Aluminum
Processing	20 µm anodizing

### Finishing diffuser

Material	UV Resistant Polycarbonate
----------	----------------------------

### Finishing bracket

Material	UV Resistant Polycarbonate
Colour	transparent

### Cables Electrification

Cable connector	Male Plug 2 Pin
Cable connector	Female Socket 2 Pin



Cable and connector  
Length 250 mm; insulation single; section 1.5 mm<sup>2</sup>; external diameter: 2x3,4 mm; colors:  
black - red.

**Code**

98879



Cable and connector  
Length 1000 mm; insulation single; section 1.5 mm<sup>2</sup>; external diameter: 2x3,4 mm; colors:  
black - red.

**Code**

98878



Bracket  
L=295mm, H=3mm, D=56mm.  
Material:Iron, colour:zinc, processing:Galvanising.

**Finish**

Grey

**Code**

98699