




Lines | 49 topLED 9 W DC 24 V | CRI 80  
94110W07

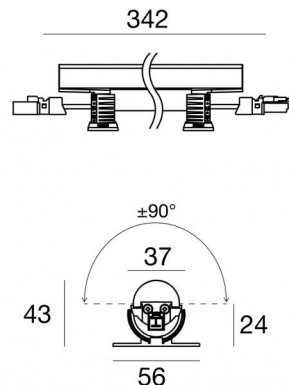

Technical data	
Type	Surface
Installation position	Wall lights - Ceiling - Floor
Installation environment	Indoor
Light Source	LED
Circuit structure	topLED
Optics	Asymmetric Wallwasher
Light emission direction	upward
Nominal power	9 W DC
Source lumens	1044 lm
Input voltage range	24V
CCT / Tone	3000 K
Colour rendering index	80 Ra
C.C. / C.V.	CV
Safety class	3
IP	IP40
IK	IK08
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	No
Dimmable article	DALI - 1-10V
Directional	Swivelling
total angle (vertical plane)	180 °
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	0.02 m
Resin potting	No
Type of light emission	Single emission
Net weight	0.191 Kg
Electrostatic discharge protection	No
Surge protection	No
Product technological characteristics	UV Resistant

### Finishing casing

Material	Aluminium 6060
Colour	Anodised Aluminum
Processing	20 µm anodizing

### Finishing diffuser

Material	UV Resistant Polycarbonate
----------	----------------------------

### Finishing bracket

Material	UV Resistant Polycarbonate
Colour	transparent

### Electronics

	99331 On/Off Driver 198-264V AC / 176-275V DC 150 W
	99332 1-10V Controller
	99374 On/Off Driver 198-264V AC / 176-275V DC 75 W
	83333 Push and Simply Dim - DALI-2 Controller
	C-E400002 Push and Simply Dim - DALI-2 Controller

### Cables Electrification

Cable connector	Male Plug 2 Pin
Cable connector	Female Socket 2 Pin

Lines | 49 topLED 9 W DC 24 V | CRI 80 | Base  
**94110W07**

Single emission lines for indoor application. The warm white LED light source with a asymmetric wallwasher light distribution is composed of 49 topped LEDs with CCT of 3000 K and a CRI 80; the source luminous flux is 1044 lm, with a 116.0 lm/W nominal luminous efficacy.

The device body is made of aluminium 6060 and features a anodised aluminum finish, processed by means of 20 µm anodizing; the diffuser is made of uv resistant polycarbonate. The ingress protection degree is IP40; the total weight is of 0.191 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 9 W. The power supply cable is included and features a 0.02 m length.

The device features protection class III and can be wall lights, ceiling or floor-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

### Energy efficiency class

This product contains a light source of energy efficiency class D.

### Illuminotechnical Features


Light Output Ratio (LOR)	82 %
Source lumens	1044 lm
Delivered lumens	861 lm
Consumption	9 W
Luminaire efficacy	95 lm/W
Colour temperature	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	80 Ra
Standard Operating Ambient Temperature	-20 / +50°C
Ordinary temperature on the glass	40°C

### LED Life / Failure Ratio

L70 B10 C0 145770h (at Tj 65 Ta 25 )

### OPTICAL

C0/C180 optics	98°
Light distribution symmetry	Asymmetrical

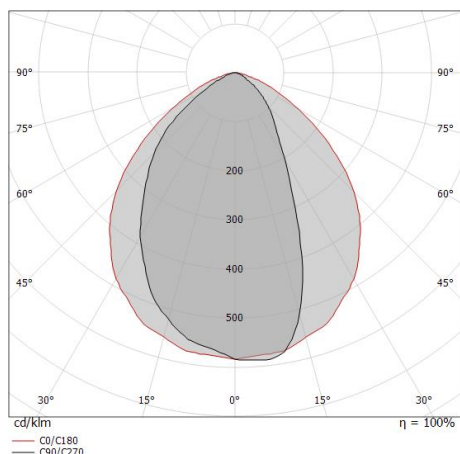

Distance [m]	Cone diameter [m]	E(0°)	E(C0)	E(C90)
0.5	1.15	2010	284	49.0°
1.0	2.30	503	71	49.0°
1.5	3.45	223	32	49.0°
2.0	4.60	126	18	49.0°
2.5	5.75	80	11	49.0°
3.0	6.90	56	8	49.0°

Distance [m]      Cone diameter [m]      Illuminance [lx]

— C0/C180 (Half-peak divergence: 98.0°)



Cable and connector

Length 250 mm; insulation single; section 1.5 mm<sup>2</sup>; external diameter: 2x3,4 mm; colors: black - red.

**Code**

98879



Cable and connector

Length 1000 mm; insulation single; section 1.5 mm<sup>2</sup>; external diameter: 2x3,4 mm; colors: black - red.

**Code**

98878



Bracket

L=295mm, H=3mm, D=56mm.

Material:Iron, colour:zinc, processing:Galvanising.

**Finish**

Grey

**Code**

98699