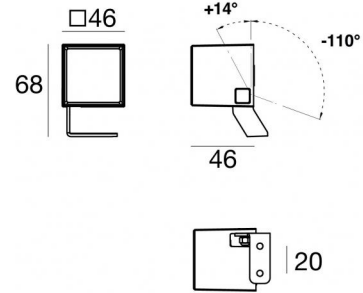


Periskop45 RGB



Projectors | 3 x powerLEDs 4.5 W DC 500 mA | RGB
95141Z60



Technical data	
Type	Surface
Installation position	Wall lights - Ceiling - Floor
Installation environment	Outdoor
Light Source	LED
Circuit structure	powerLEDs
Optics	Wide Flood
Light emission direction	frontal
Nominal power	4.5 W DC
Input voltage range	500mA
CCT / Tone	RGB
C.C. / C.V.	CC
Safety class	3
IP	IP66
IK	IK05
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	No
Dimmable article	Yes
Directional	Swivelling
total angle (vertical plane)	124 °
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	1 m
Resin potting	Yes
Type of light emission	Single emission
Net weight	0.2 Kg
Electrostatic discharge protection	No
Surge protection	No
Product technological characteristics	Acquastop - TCS

Finishing casing

Material	Die-cast Aluminium EN AB - 46100
Colour	Grey
Processing	Open pore anodizing + Powder Coating

Finishing diffuser

Material	Extra clear glass - Tempered
Colour	transparent
Processing	Silk-screening

Finishing bracket

Material	Aluminium 5754
Colour	Anodised Black
Processing	15 µm Anodizing

Electronics



C-E500012
DMX-RDM - NFC Multi Channel 4ch. 19~50V DC (- art.)

Cables Electrification

Cable connector	No
-----------------	----

Lumen RGBW

N. Led	Red	Green	Blue
3	80 lm	124 lm	47 lm

Periskop45 RGB



Projectors | 3 x powerLEDs 4.5 W DC 500 mA | RGB
95141Z60

Single emission projectors for outdoor application. The RGB LED light source with a wide flood light distribution is composed of 3 powered LEDs.

The device body is made of die-cast aluminium en ab - 46100 and features a grey finish, processed by means of open pore anodizing + powder coating; the diffuser is made of extra clear glass - tempered with a silk-screening treatment. The ingress protection degree is IP66; the total weight is of 0.2 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 4.5 W. The power supply cable is included and features a 1 m length.

The device features protection class III and can be wall lights, ceiling or floor-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.














Standard Operating Ambient Temperature	-20 / +50°C
Ordinary temperature on the glass	40°C

LED Life / Failure Ratio
L70 B10 C0 247450h

Periskop45 RGB



Periskop45 RGB | Projectors | Accessories
95141Z60

 	<p>Picket installation position: land,Cover material: aisi 304 steel</p>	<p>Code <u>98550</u></p>
 	<p>Picket - L. 160mm installation position: land,Cover material: aisi 304 steel</p>	<p>Code <u>98624</u></p>
 	<p>Picket - L. 700mm installation position: land,Cover material: aisi 304 steel</p>	<p>Code <u>C-F500002</u></p>
 	<p>Picket - L. 1000mm installation position: land,Cover material: aisi 304 steel</p>	<p>Code <u>C-F500003</u></p>
	<p>Bag / Fixing kit - Belt for installation on tree</p>	<p>Code <u>99802</u></p>
 	<p>Dimmer RF Remote controller</p>	<p>Code <u>C-E700003</u></p>
 	<p>RF remote control</p>	<p>Code <u>C-W600001</u></p>