




Uplights | 3 topLED 1.5 W DC 24 V | CRI 80  
95476W00



Technical data	
Type	Trimless
Installation position	Wall lights - Floor
Installation environment	Outdoor
Light Source	LED
Circuit structure	topLED
Optics	Diffused
Nominal power	1.5 W DC
Source lumens	60 lm
Input voltage range	24V
CCT / Tone	3000 K
Colour rendering index	80 Ra
C.C. / C.V.	CV
Safety class	3
IP	IP68
Installation limitations	Not for underwater use
IK	IK09
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	No
Dimmable article	DALI - 1-10V
Directional	No
Tilting	No
Walk-over	Yes
Drive-over	2000 Kg
Cable included	Yes
Cable length	1.5 m
Resin potting	Yes
Type of light emission	Single emission
Net weight	0.100 Kg
Electrostatic discharge protection	No
Surge protection	No

#### Finishing casing

Material	Aluminium
Colour	Grey
Processing	Coating

#### Finishing diffuser

Material	PC
Colour	transparent
Processing	Sandblasting

#### Electronics



89488  
On/Off Driver 190–250V AC / 180–275V DC 15 W (1 - 10 art.)



89179  
On/Off Driver 198–264V AC 24 W (1 - 16 art.)



89359  
On/Off Driver 198–264V AC / 180–275V DC 48 W (1 - 32 art.)



99332  
1-10V Controller (1 - 100 art.)



99722  
DALI Controller 90–305V AC / 127–431V DC 120 W (1 art.)

Uplights | 3 topLED 1.5 W DC 24 V | CRI 80 | Base  
**95476W00**


Single emission uplights for outdoor application. The warm white LED light source with a diffused light distribution is composed of 3 topped LEDs with CCT of 3000 K and a CRI 80; the source luminous flux is 60 lm, with a 40.0 lm/W nominal luminous efficacy.

The device body is made of aluminium and features a grey finish, processed by means of coating; the diffuser is made of PC with a sandblasting treatment. The ingress protection degree is IP68; the total weight is of 0.100 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 1.5 W. The power supply cable is included and features a 1.5 m length.

The device features protection class III and can be wall lights or floor-mounted with an outer casing, code 98291 (for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

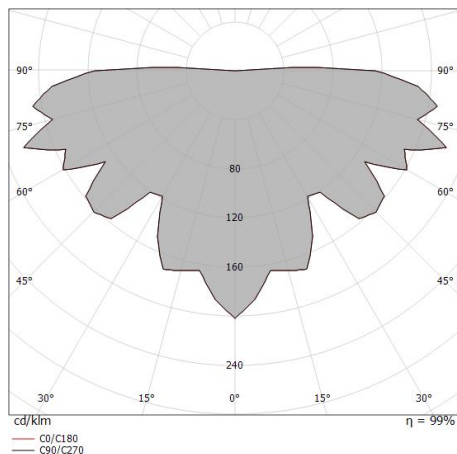

#### Energy efficiency class

This product contains a light source of energy efficiency class D.

#### Illuminotecnical Features

Light Output Ratio (LOR)	100 %
Source lumens	60 lm
Delivered lumens	60 lm
Consumption	1,4 W
Luminaire efficacy	60 lm/W
Colour temperature	3000 K
Colour rendering index	80 Ra
Standard Operating Ambient Temperature	-20 / +50°C
Ordinary temperature on the glass	40°C

#### UGR

UGR axial	32.7
UGR transversal	32.7
X=4H   Y=8H	S=0.25H
Reflection factor	70/50/20

#### OPTICAL

C0/C180 optics	180°
Light distribution symmetry	Symmetrical



Orma\_FO | Uplights | Accessories  
**95476W00**



80



Ø43

Outer casing

installation position: floor, land; type of installation: masonry L=43mm, H=80mm, D=43mm.

Material:ABS Plastic, colour:black.

**Code**

98292



98 /  
138



105

Outer casing

installation position: floor, land; type of installation: masonry L=105mm, H=122mm,

D=105mm.

Material:Aluminium, colour:Anodised Aluminum, processing:Anodisation.

**Finish**



**Code**

98291