


Paseo_L on/off



Lines | 85-277 V
264 topLED 19.5 W DC - 21.8 W AC | CRI 80
96152W07

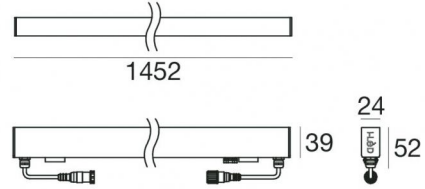

Technical data

Type	Frameless
Installation position	Wall lights - Ceiling - Floor
Installation environment	Outdoor
Light Source	LED
Circuit structure	topLED
Optics	Asymmetric Wallwasher
Light emission direction	frontal
Nominal power	19.5 W DC
Total Power	21.8 W
Source lumens	2079 lm
Nominal input voltage	220 - 240 V AC
Input voltage range	85 - 277 V AC
Frequency	50 - 60 Hz
CCT / Tone	3000 K
Colour rendering index	80 Ra
C.C. / C.V.	AC
Safety class	2
IP	IP67
IK	IK08
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	Driver
Dimmable article	No
Directional	No
Tilting	No
Walk-over	Yes
Drive-over	No
Cable included	Yes
Cable length	0.250 m
Resin potting	No
Type of light emission	Single emission
Net weight	1.45 Kg
Electrostatic discharge protection	4 KV
Surge protection	6 KV
Optics technology	Dot free
Product technological characteristics	TCS - UV Resistant

Finishing casing

Material	UV Resistant Polycarbonate
Colour	transparent

Finishing diffuser

Material	UV Resistant Polycarbonate
Colour	transparent

Paseo_L on/off



Lines | 85-277 V | 264 topLED 19.5 W DC - 21.8 W AC | CRI 80 | Base
96152W07

Single emission lines for outdoor application. The warm white LED light source with a asymmetric wallwasher light distribution is composed of 264 topLED LEDs with CCT of 3000 K and a CRI 80; the source luminous flux is 2079 lm, with a 106.6 lm/W nominal luminous efficacy.

The device body is made of uv resistant polycarbonate and features a transparent finish; the diffuser is made of uv resistant polycarbonate. The ingress protection degree is IP67; the total weight is of 1.45 kg.

The total absorbed power is 21.8 W. The power supply cable is included and features a 0.250 m length.

The device features protection class II and can be wall lights, ceiling or floor-mounted with an outer casing, code 98845(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

Energy efficiency class

This product contains 4 light sources of energy efficiency class E.

Illuminotechnical Features


Light Output Ratio (LOR)	80 %
Source lumens	2079 lm
Delivered lumens	1665 lm
Consumption	21.8 W
Luminaire efficacy	76 lm/W
Colour temperature	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	80 Ra
Standard Operating Ambient Temperature	-20 / +50°C
Ordinary temperature on the glass	40°C

LED Life / Failure Ratio

L70 B20 C0 73000h

OPTICAL

C0/C180 optics	107°
Light distribution symmetry	Asymmetrical

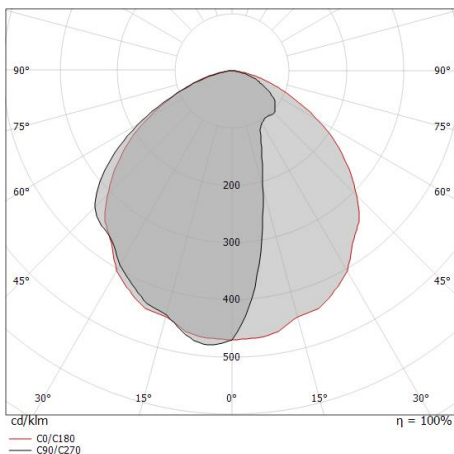

Distance [m]	Cone diameter [m]	E(0°) E(C0)	3131 327
0.5	1.36	E(0°) E(C0)	53.6°
1.0	2.71	E(0°) E(C0)	783 82
1.5	4.07	E(0°) E(C0)	348 36
2.0	5.43	E(0°) E(C0)	196 20
2.5	6.78	E(0°) E(C0)	125 13
3.0	8.14	E(0°) E(C0)	87 9

Distance [m] Cone diameter [m] Illuminance [lx]

— C0/C180 (Half-peak divergence: 107.2°)



	<p>Cable and connector - 24V DC 190-250V AC - Conn. F.4 pin M12 (L 5m) Length 5000 mm; insulation double; cable gland: no; colors: white - black - blue - brown.</p>	<p>Code 89190</p>
	<p>Cable and connector - 24V DC 190-250V AC - Conn. F.4 pin M12 (L 1,5m) Length 1500 mm; insulation double; cable gland: no; colors: white - black - blue - brown.</p>	<p>Code 99216</p>
	<p>Outer casing - In-ground outer-casing installation position: floor; type of installation: drywall L=1453mm, H=49mm, D=36mm. Material:Aluminium, colour:Anodised Aluminum, processing:Anodisation.</p>	<p>Finish </p> <p>Code 98357</p>
	<p>Outer casing installation position: floor; type of installation: drywall L=1453mm, H=89mm, D=69.5mm. Material:Aluminium, colour:Anodised Aluminum, processing:Anodisation.</p>	<p>Finish </p> <p>Code 98369</p>
	<p>Outer casing - False-ceilings outer-casing installation position: floor; type of installation: drywall L=1455mm, H=55.5mm, D=36mm. Material:Aluminium, colour:Anodised Aluminum, processing:Anodisation.</p>	<p>Finish </p> <p>Code 98376</p>
	<p>Outer casing installation position: floor; type of installation: masonry L=1453mm, H=49mm, D=28mm. Material:Aluminium, colour:Anodised Aluminum, processing:Anodisation.</p>	<p>Finish </p> <p>Code 98470</p>
	<p>Outer casing installation position: floor; type of installation: masonry L=1453mm, H=29.8mm, D=28mm. Material:Aluminium, colour:Anodised Aluminum, processing:Anodisation.</p>	<p>Finish </p> <p>Code 98474</p>
	<p>Outer casing installation position: wall lights; type of installation: masonry L=1453mm, H=66mm, D=32mm. Material:Aluminium, colour:Anodised Aluminum, processing:Anodisation.</p>	<p>Finish </p> <p>Code 98838</p>

Paseo_L on/off



Paseo_L on/off | Lines | Accessories
96152W07


		<p>Outer casing installation position: wall lights; type of installation: masonry L=1457mm, H=91mm, D=64.5mm. Material:Aluminium, colour:Anodised Aluminum, processing:Anodisation.</p>	<p>Finish Code 98845</p>
		<p>Closing cap - two profile end caps</p>	<p>Code 98553</p>
		<p>Closing cap</p>	<p>Code 98554</p>
		<p>Closing cap</p>	<p>Code 98466</p>
		<p>Closing cap</p>	<p>Code 98465</p>
		<p>Closing cap</p>	<p>Code 98464</p>
		<p>Closing cap Material:Aluminium, colour:Anodised Aluminum, processing:Anodisation.</p>	<p>Code 98876</p>
		<p>Closing cap Material:Aluminium, colour:Anodised Aluminum, processing:Anodisation.</p>	<p>Code 98840</p>

Paseo_L on/off



Paseo_L on/off | Lines | Accessories

96152W07

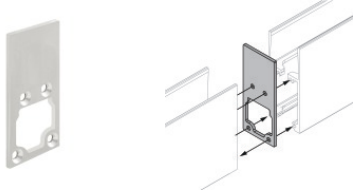

Closing cap

Material:Aluminium, colour:Anodised Aluminum, processing:Anodisation.

Code

98841



Key

Code


98475



Bag / Fixing kit

Code

98771

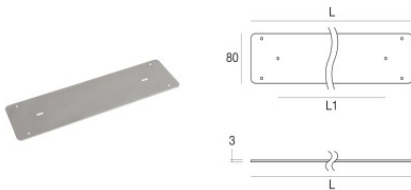

Bag / Fixing kit

Code

98773