



# Paseo\_X ON/OFF



Lines | 90-264 V

24 x powerLED 17.3 W DC - 19.4 W AC | CRI 80

**96197W30**

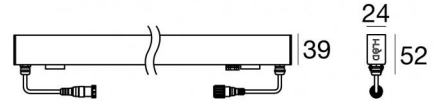

Technical data	
Type	Frameless
Installation position	Wall lights - Ceiling - Floor
Installation environment	Outdoor
Light Source	LED
Circuit structure	powerLED
Optics	Medium Flood
Light emission direction	upward
Nominal power	17.3 W DC
Total Power	19.4 W
Source lumens	2424 lm
Nominal input voltage	220 - 240 V AC
Input voltage range	90 - 264 V AC
Frequency	50 - 60 Hz
CCT / Tone	3000 K
Colour rendering index	80 Ra
C.C. / C.V.	AC
Safety class	2
IP	IP67
IK	IK08
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	Driver
Dimmable article	No
Directional	No
Tilting	No
Walk-over	Yes
Drive-over	No
Cable included	Yes
Cable length	0.25 m
Resin potting	No
Type of light emission	Single emission
Net weight	0.89 Kg
Electrostatic discharge protection	4 KV
Surge protection	6 KV
Product technological characteristics	TCS - UV Resistant

Finishing casing	
Material	UV Resistant Polycarbonate
Colour	transparent

Finishing diffuser	
Material	UV Resistant Polycarbonate
Colour	transparent

# Paseo\_X ON/OFF



Lines | 90-264 V | 24 x powerLED 17.3 W DC - 19.4 W AC | CRI 80 | Base 96197W30



Single emission lines for outdoor application. The warm white LED light source with a medium flood light distribution is composed of 24 powered LEDs with CCT of 3000 K and a CRI 80; the source luminous flux is 2424 lm, with a 140.1 lm/W nominal luminous efficacy.

The device body is made of uv resistant polycarbonate and features a transparent finish; the diffuser is made of uv resistant polycarbonate. The ingress protection degree is IP67; the total weight is of 0.89 kg.

The total absorbed power is 19.4 W. The power supply cable is included and features a 0.25 m length.

The device features protection class II and can be wall lights, ceiling or floor-mounted with an outer casing, code 98844(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

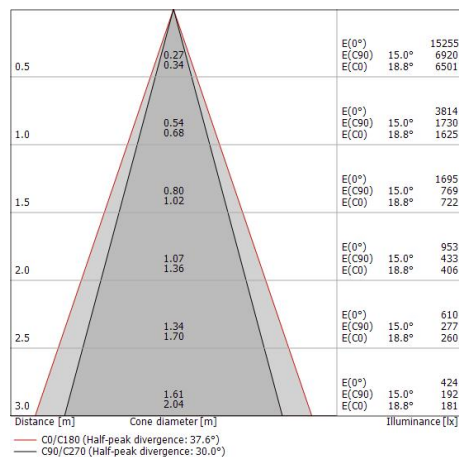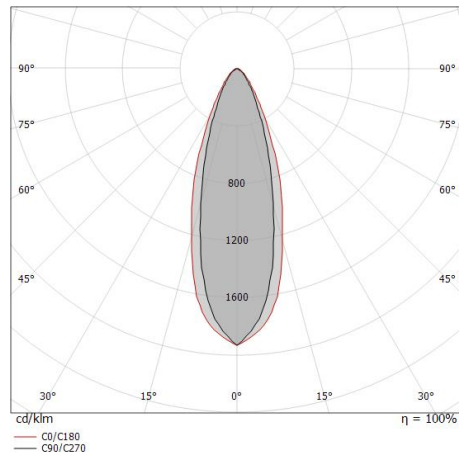

## Energy efficiency class

This product contains a light source of energy efficiency class D.

## Illuminotechnical Features

Light Output Ratio (LOR)	81 %
Source lumens	2424 lm
Delivered lumens	1975 lm
Consumption	19.4 W
Luminaire efficacy	101 lm/W
Colour temperature	3000 K
Standard Deviation of Colour Matching	1/16 ANSI BIN
Colour rendering index	80 Ra
Standard Operating Ambient Temperature	-20 / +50°C
Ordinary temperature on the glass	40°C

## LED Life / Failure Ratio

L70 B10 C0 361980h (at Tj 60 Ta 25 )

## UGR

UGR axial	16.7
UGR transversal	19.4
X=4H   Y=8H	S=0.25H
Reflection factor	70/50/20

## OPTICAL

C90/C270 optics	30°
C0/C180 optics	38°
Light distribution simmetry	Symmetrical 2 assis



	<p>Cable and connector - 24V DC 190-250V AC - Conn. F.4 pin M12 (L 1,5m)                      Length 1500 mm; insulation double; cable gland: no; colors: white - black - blue - brown.</p>	<p><b>Code</b>  <u>99216</u></p>	
	<p>Cable and connector - 24V DC 190-250V AC - Conn. F.4 pin M12 (L 5m)                      Length 5000 mm; insulation double; cable gland: no; colors: white - black - blue - brown.</p>	<p><b>Code</b>  <u>89190</u></p>	
	<p>Cable and connector - Extension cable                      Length 1000 mm; insulation double; cable gland: no.</p>	<p><b>Code</b>  <u>98437</u></p>	
	<p>Cable and connector - 24V DC 190-250V AC - Conn M. + F. 4 pin M12 (L 5m)                      Length 5000 mm; insulation double; cable gland: no.</p>	<p><b>Code</b>  <u>98149</u></p>	
	<p>Cable and connector - 24V DC 190-250V AC - Conn M. + F. 4 pin M12 (L 10m)                      Length 10000 mm; insulation double; cable gland: no.</p>	<p><b>Code</b>  <u>89188</u></p>	
		<p>Key</p>	<p><b>Code</b>  <u>98475</u></p>
	<p>Cable and connector - DMX - Conn. M.5 pin M12 (L 5m)                      Length 5000 mm; insulation double; cable gland: no; external diameter: 4.5 mm.</p>	<p><b>Code</b>  <u>89189</u></p>	
	<p>Cable and connector                      Length 10000 mm; insulation double; cable gland: no.</p>	<p><b>Code</b>  <u>89187</u></p>	

# Paseo\_X ON/OFF



Paseo\_X ON/OFF | Lines | Accessories  
**96197W30**



Cable and connector - DMX - Conn. M.5 pin M12 + M.3 pin XLR (L 5m)  
 Length 5000 mm; insulation double; cable gland: no.

**Code**  
89186




Cable and connector - DMX - Conn. M.5 pin M12 + M.5 pin XLR (L 5m)  
 Length 5000 mm; insulation double; section 0.25 mm<sup>2</sup>; cable gland: no.

**Code**  
98493




Bag / Fixing kit

**Code**  
98771




Bag / Fixing kit

**Code**  
98773




Outer casing  
 installation position: wall lights; type of installation: masonry L=1153mm, H=66mm,  
 D=32mm.  
 Material:Aluminium, colour:Anodised Aluminum, processing:Anodisation.

**Finish**  **Code**  
98837




Closing cap  
 Material:Aluminium, colour:Anodised Aluminum, processing:Anodisation.

**Code**  
98840



Closing cap  
 Material:Aluminium, colour:Anodised Aluminum, processing:Anodisation.

**Code**  
98841






Outer casing  
 installation position: wall lights; type of installation: masonry L=1157mm, H=91mm,  
 D=64.5mm.  
 Material:Aluminium, colour:Anodised Aluminum, processing:Anodisation.


**Finish**  **Code**  
98844


# Paseo\_X ON/OFF






Paseo\_X ON/OFF | Lines | Accessories  
**96197W30**



 	Outer casing	<b>Finish</b>	<b>Code</b>
	installation position: floor; type of installation: drywall L=1153mm, H=49mm, D=36mm. Material:Aluminium, colour:Anodised Aluminum, processing:Anodisation.		<u>98356</u>




	Closing cap		<b>Code</b>
	Material:Aluminium, colour:Anodised Aluminum, processing:Anodisation.		<u>98876</u>




	Closing cap - two profile end caps		<b>Code</b>
			<u>98553</u>

 	Outer casing	<b>Finish</b>	<b>Code</b>
	installation position: floor; type of installation: masonry L=1153mm, H=49mm, D=28mm. Material:Aluminium, colour:Anodised Aluminum, processing:Anodisation.		<u>98469</u>

 	Closing cap		<b>Code</b>
			<u>98466</u>

 	Closing cap		<b>Code</b>
			<u>98554</u>


 	Outer casing	<b>Finish</b>	<b>Code</b>
	installation position: floor; type of installation: masonry L=1153mm, H=29.8mm, D=28mm. Material:Aluminium, colour:Anodised Aluminum, processing:Anodisation.		<u>98473</u>

 	Outer casing - False-ceilings outer-casing	<b>Finish</b>	<b>Code</b>
	installation position: floor; type of installation: drywall L=1155mm, H=55.5mm, D=36mm. Material:Aluminium, colour:Anodised Aluminum, processing:Anodisation.		<u>98375</u>

# Paseo\_X ON/OFF




Paseo\_X ON/OFF | Lines | Accessories  
**96197W30**




Closing cap


**Code**  
98465



Outer casing

installation position: floor; type of installation: drywall L=1153mm, H=89mm, D=69.5mm.  
Material:Aluminium, colour:Anodised Aluminum, processing:Anodisation.

**Finish**  
 **Code**  
98368



Closing cap

**Code**  
98464



Cable and connector - DMX - Conn. M.5 pin M12 + F.3 pin XLR (L 5m)  
Length 5000 mm; insulation double; cable gland: no.

**Code**  
98494