



Paseo_X DALI

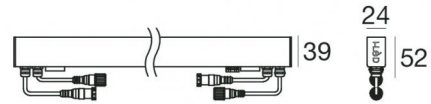

Lines | x powerLED 0 W DC - 7.7 W AC | CRI 80
97256W08



Technical data	
Type	Frameless
Installation position	Wall lights - Ceiling - Floor
Installation environment	Outdoor
Light Source	LED
Circuit structure	powerLED
Optics	Narrow Spot
Light emission direction	frontal
Nominal power	0 W DC
Total Power	7.7 W
Input voltage range	85 - 277 V AC
CCT / Tone	3000 K
Colour rendering index	80 Ra
C.C. / C.V.	AC
Safety class	2
IP	IP67
IK	IK08
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	Control unit/Driver
Dimmable article	DALI
Directional	No
Tilting	No
Walk-over	Yes
Drive-over	No
Cable included	Yes
Cable length	0.25 m
Resin potting	No
Type of light emission	Single emission
Net weight	0.39 Kg
Electrostatic discharge protection	4 KV
Surge protection	6 KV
Product technological characteristics	TCS - UV Resistant

Finishing casing	
Material	UV Resistant Polycarbonate
Colour	transparent

Finishing diffuser	
Material	UV Resistant Polycarbonate
Colour	transparent

Cables Electrification	
Cable connector	Male Plug 4 pin M12
IP (locked condition)	67
Cable connector	Female Socket 4 Pin M12

Cables Signal	
IP (locked condition)	67
Cable connector	Male Plug 5 Pin M12
Cable connector	Female Socket 5 Pin M12



Cable and connector - DMX - Conn. M.5 pin M12 (L 5m)
Length 5000 mm; insulation double; cable gland: no; external diameter: 4.5 mm.

Code
89189



Cable and connector - 24V DC 190-250V AC - Conn. F.4 pin M12 (L 5m)
Length 5000 mm; insulation double; cable gland: no; colors: white - black - blue - brown.

Code
89190



Cable and connector - DMX - Conn. M.5 pin M12 + M.3 pin XLR (L 5m)
Length 5000 mm; insulation double; cable gland: no.

Code
89186



Cable and connector
Length 10000 mm; insulation double; cable gland: no.

Code
89187



Cable and connector - 24V DC 190-250V AC - Conn M. + F. 4 pin M12 (L 5m)
Length 5000 mm; insulation double; cable gland: no.

Code
98149



Cable and connector - 24V DC 190-250V AC - Conn M. + F. 4 pin M12 (L 10m)
Length 10000 mm; insulation double; cable gland: no.

Code
89188



Cable and connector - 24V DC 190-250V AC - Conn. F.4 pin M12 (L 1,5m)
Length 1500 mm; insulation double; cable gland: no; colors: white - black - blue - brown.

Code
99216



Cable and connector - Extension cable
Length 1000 mm; insulation double; cable gland: no.

Code
98437



Cable and connector - DMX - Conn. M.5 pin M12 + M.5 pin XLR (L 5m)
 Length 5000 mm; insulation double; section 0.25 mm²; cable gland: no.

Code
98493




Cable and connector - DMX - Conn. M.5 pin M12 + F.3 pin XLR (L 5m)
 Length 5000 mm; insulation double; cable gland: no.

Code
98494




Closing cap - two profile end caps

Code
98553

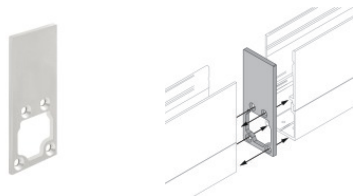


Closing cap

Code
98554

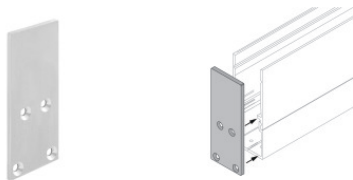


Closing cap

Code
98466

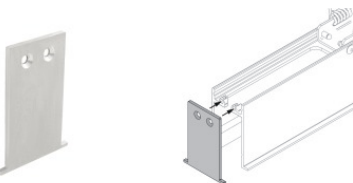

Closing cap

Code
98465

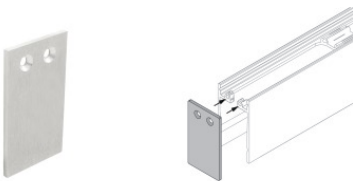

Closing cap






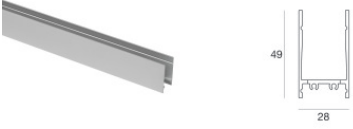





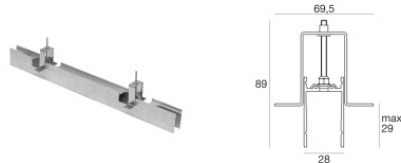

Code
98464

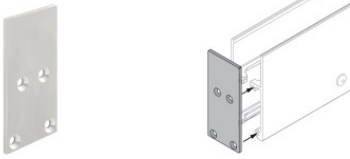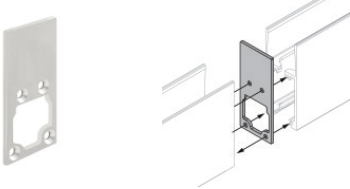

Closing cap
 Material:Aluminium, colour:Anodised Aluminum, processing:Anodisation.


Code
98876



	<p>Closing cap Material:Aluminium, colour:Anodised Aluminum, processing:Anodisation.</p>	<p>Code 98840</p>
	<p>Closing cap Material:Aluminium, colour:Anodised Aluminum, processing:Anodisation.</p>	<p>Code 98841</p>
	<p>Key</p>	<p>Code 98475</p>
	<p>Outer casing installation position: floor; type of installation: masonry L=576mm, H=49mm, D=36mm. Material:Aluminium, colour:Anodised Aluminum, processing:Anodisation.</p>	<p>Finish  Code 98430</p>
	<p>Outer casing installation position: floor; type of installation: masonry L=577mm, H=49mm, D=28mm. Material:Aluminium, colour:Anodised Aluminum, processing:Anodisation.</p>	<p>Finish  Code 98468</p>
	<p>Outer casing installation position: floor; type of installation: masonry L=577mm, H=29.8mm, D=28mm. Material:Aluminium, colour:Anodised Aluminum, processing:Anodisation.</p>	<p>Finish  Code 98472</p>
	<p>Outer casing installation position: ceiling; type of installation: drywall L=577mm, H=55.5mm, D=36mm. Material:Aluminium, colour:Anodised Aluminum, processing:Anodisation.</p>	<p>Finish  Code 98435</p>
	<p>Outer casing installation position: ceiling; type of installation: drywall L=577mm, H=89mm, D=69.5mm. Material:Aluminium, colour:Anodised Aluminum, processing:Anodisation.</p>	<p>Finish  Code 98434</p>




Paseo_X DALI | Lines | Accessories
97256W08



Outer casing
 installation position: wall lights; type of installation: masonry L=577mm, H=66mm, D=32mm.
 Material:Aluminium, colour:Anodised Aluminium, processing:Anodisation.

Finish	Code
	98839




Outer casing
 installation position: wall lights; type of installation: masonry L=581mm, H=91mm, D=64.5mm.
 Material:Aluminium, colour:Anodised Aluminium, processing:Anodisation.

Finish	Code
	98843



Bag / Fixing kit

Code
98771



Bag / Fixing kit

Code
98772