


Paseo_L



Lines | 120 topLED 6.6 W DC 24 V | CRI 80
97673W20

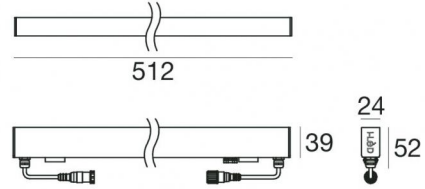

Technical data	
Type	Frameless
Installation position	Wall lights - Ceiling - Floor
Installation environment	Outdoor
Light Source	LED
Circuit structure	topLED
Optics	Medium Flood
Light emission direction	frontal
Nominal power	6.6 W DC
Source lumens	720 lm
Input voltage range	24V
CCT / Tone	3000 K
Colour rendering index	80 Ra
C.C. / C.V.	CV
Safety class	3
IP	IP67
IK	IK08
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	No
Dimmable article	DALI - 1-10V
Directional	No
Tilting	No
Walk-over	Yes
Drive-over	No
Cable included	Yes
Cable length	0.250 m
Resin potting	No
Type of light emission	Single emission
Net weight	0.39 Kg
Electrostatic discharge protection	No
Surge protection	No
Optics technology	Dot free
Product technological characteristics	TCS - UV Resistant






Finishing casing

Material	UV Resistant Polycarbonate
Colour	transparent

Finishing diffuser

Material	UV Resistant Polycarbonate
Colour	transparent

Electronics





Lines | 120 topLED 6.6 W DC 24 V | CRI 80 | Base
97673W20



Single emission lines for outdoor application. The warm white LED light source with a medium flood light distribution is composed of 120 topped LEDs with CCT of 3000 K and a CRI 80; the source luminous flux is 720 lm, with a 109.1 lm/W nominal luminous efficacy.

The device body is made of uv resistant polycarbonate and features a transparent finish; the diffuser is made of uv resistant polycarbonate. The ingress protection degree is IP67; the total weight is of 0.39 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 6.6 W. The power supply cable is included and features a 0.250 m length.

The device features protection class III and can be wall lights, ceiling or floor-mounted with an outer casing, code 98842(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

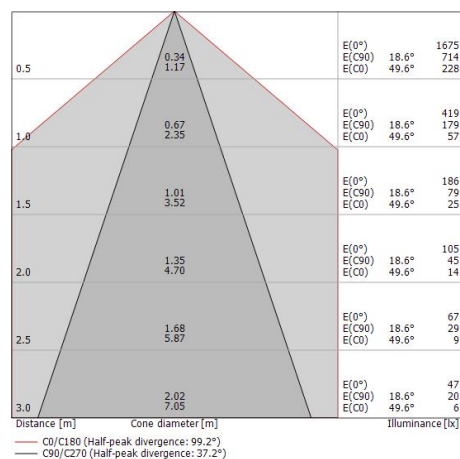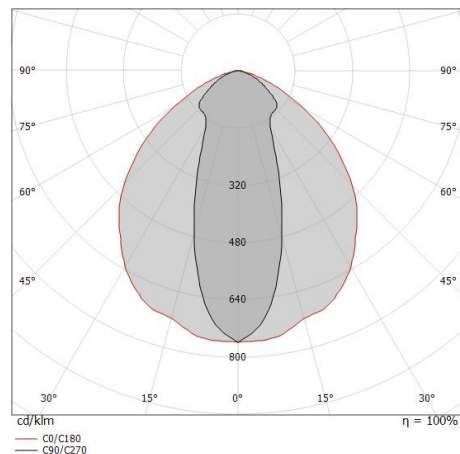

Energy efficiency class

This product contains 5 light sources of energy efficiency class E.

Illuminotechnical Features

Light Output Ratio (LOR)	76 %
Source lumens	720 lm
Delivered lumens	553 lm
Consumption	6 W
Luminaire efficacy	92 lm/W
Colour temperature	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	80 Ra
Standard Operating Ambient Temperature	-20 / +50°C
Ordinary temperature on the glass	40°C

LED Life / Failure Ratio

L70 B20 C0 73000h

UGR

UGR axial	21
UGR transversal	24.2
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL

C90/C270 optics	37°
C0/C180 optics	99°
Light distribution simmetry	Symmetrical 2 assis



	<p>Cable and connector - 24V DC 190-250V AC - Conn. F.4 pin M12 (L 1,5m) Length 1500 mm; insulation double; cable gland: no; colors: white - black - blue - brown.</p>	<p>Code <u>99216</u></p>	
	<p>Cable and connector - 24V DC 190-250V AC - Conn. F.4 pin M12 (L 5m) Length 5000 mm; insulation double; cable gland: no; colors: white - black - blue - brown.</p>	<p>Code <u>89190</u></p>	
	<p>Cable and connector - 24V DC 190-250V AC - Conn M. + F. 4 pin M12 (L 5m) Length 5000 mm; insulation double; cable gland: no.</p>	<p>Code <u>98149</u></p>	
	<p>Cable and connector - 24V DC 190-250V AC - Conn M. + F. 4 pin M12 (L 10m) Length 10000 mm; insulation double; cable gland: no.</p>	<p>Code <u>89188</u></p>	
	<p>Cable and connector - Extension cable Length 1000 mm; insulation double; cable gland: no.</p>	<p>Code <u>98437</u></p>	
		<p>Key</p>	<p>Code <u>98475</u></p>
		<p>Outer casing installation position: floor; type of installation: drywall L=513mm, H=49mm, D=36mm. Material:Aluminium, colour:Anodised Aluminum, processing:Anodisation.</p>	<p>Finish Code <u>98355</u></p>
	<p>Closing cap Material:Aluminium, colour:Anodised Aluminum, processing:Anodisation.</p>	<p>Code <u>98876</u></p>	



	<p>Closing cap - two profile end caps</p>	<p>Code 98553</p>
	<p>Outer casing installation position: floor; type of installation: masonry L=513mm, H=49mm, D=28mm. Material:Aluminium, colour:Anodised Aluminum, processing:Anodisation.</p>	<p>Finish </p> <p>Code 98467</p>
	<p>Closing cap</p>	<p>Code 98466</p>
	<p>Closing cap</p>	<p>Code 98554</p>
	<p>Outer casing installation position: floor; type of installation: masonry L=513mm, H=29.8mm, D=28mm. Material:Aluminium, colour:Anodised Aluminum, processing:Anodisation.</p>	<p>Finish </p> <p>Code 98471</p>
	<p>Outer casing installation position: floor; type of installation: drywall L=510mm, H=55.5mm, D=36mm. Material:Aluminium, colour:Anodised Aluminum, processing:Anodisation.</p>	<p>Finish </p> <p>Code 98374</p>
	<p>Closing cap</p>	<p>Code 98465</p>
	<p>Outer casing installation position: floor; type of installation: drywall L=513mm, H=89mm, D=69.5mm. Material:Aluminium, colour:Anodised Aluminum, processing:Anodisation.</p>	<p>Finish </p> <p>Code 98367</p>



		Closing cap	Code
			<u>98464</u>
		Outer casing installation position: wall lights; type of installation: masonry L=513mm, H=66mm, D=32mm. Material:Aluminium, colour:Anodised Aluminium, processing:Anodisation.	Finish
			Code
			<u>98836</u>
		Closing cap	Code
			<u>98840</u>
		Closing cap	Code
			<u>98841</u>
		Outer casing installation position: wall lights; type of installation: masonry L=517mm, H=91mm, D=64.5mm. Material:Aluminium, colour:Anodised Aluminium, processing:Anodisation.	Finish
			Code
			<u>98842</u>
		Bag / Fixing kit	Code
			<u>98771</u>
		Bag / Fixing kit	Code
			<u>98772</u>