



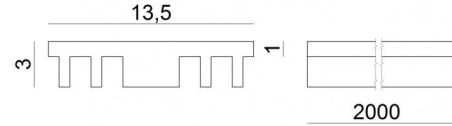

Modular
98956M

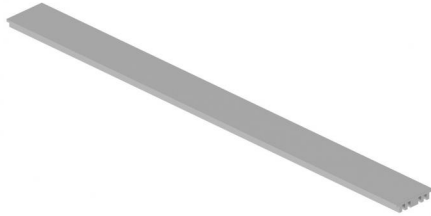

Technical data	
Type	Profiles
Installation position	Wall lights - Ceiling
Installation environment	Indoor
Glow wire test	No
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Dimmable article	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	No
Resin potting	No
Modularity	Modular

Finishing casing	
Material	Aluminium
Colour	Aluminium
Processing	Anodisation



Modular
98956M

Components

		<p>Dropper RGB 60 LEDs/m - LED Strip topLED 72 W DC 24 V 14.4 W/m</p>	<p>Code <u>98025</u></p>
		<p>Silicone_C Basic RGB 60 LEDs/m</p>	<p>Code <u>98033</u></p>
		<p>Ribbon Basic 60 LEDs/m - LED Strip topLED 24 W DC 24 V 4.8 W/m 570.2 Lm/m</p>	<p>Code <u>98012</u></p>
		<p>Ribbon Basic 60 LEDs/m - LED Strip topLED 24 W DC 24 V 4.8 W/m 540 Lm/m</p>	<p>Code <u>98011</u></p>
		<p>Ribbon 120 LEDs/m - LED Strip topLED 60 W DC 24 V 12 W/m 1367.8 Lm/m</p>	<p>Code <u>98077</u></p>
		<p>Ribbon 120 LEDs/m - LED Strip topLED 60 W DC 24 V 12 W/m 1236 Lm/m</p>	<p>Code <u>98078</u></p>
		<p>Ribbon RGB 60 LEDs/m - LED Strip topLED 72 W DC 24 V 14.4 W/m</p>	<p>Code <u>98017</u></p>



98956M



Anti-glare
Anti-glare Type: eyelid.
Material:Aluminium 6060, colour:Anodised Aluminum, processing:20 µm anodizing.

Finish	Code
	98778



Profile - 10 x Heat Sink
Material:Aluminium 6060, colour:Anodised Aluminum, processing:20 µm anodizing.

Code
99999