




Modular
C-K100016

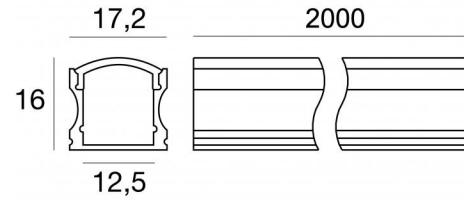

Technical data	
Type	Profiles
Installation position	Wall lights - Ceiling
Installation environment	Indoor
Glow wire test	No
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Dimmable article	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	No
Resin potting	No
Modularity	Modular

Finishing casing	
Material	Aluminium
Colour	Anodised Black
Processing	Anodisation



Modular
C-K100016

Components

		<p>Dropper RGB 60 LEDs/m - LED Strip topLED 72 W DC 24 V 14.4 W/m</p>	<p>Code <u>98025</u></p>
		<p>Silicone_C Basic RGB 60 LEDs/m</p>	<p>Code <u>98033</u></p>
		<p>Ribbon Basic 60 LEDs/m - LED Strip topLED 24 W DC 24 V 4.8 W/m 570.2 Lm/m</p>	<p>Code <u>98012</u></p>
		<p>Ribbon Basic 60 LEDs/m - LED Strip topLED 24 W DC 24 V 4.8 W/m 540 Lm/m</p>	<p>Code <u>98011</u></p>
		<p>Ribbon 120 LEDs/m - LED Strip topLED 60 W DC 24 V 12 W/m 1367.8 Lm/m</p>	<p>Code <u>98077</u></p>
		<p>Ribbon 120 LEDs/m - LED Strip topLED 60 W DC 24 V 12 W/m 1236 Lm/m</p>	<p>Code <u>98078</u></p>
		<p>Ribbon RGB 60 LEDs/m - LED Strip topLED 72 W DC 24 V 14.4 W/m</p>	<p>Code <u>98017</u></p>
		<p>Silicone_C Hi-Flux 60 LEDs/m</p>	<p>Code <u>98042</u></p>



		<p>Anti-glare Anti-glare Type: eyelid. Material:Aluminium 6060, colour:Anodised Aluminum, processing:20 µm anodizing.</p>	<p>Finish </p>	<p>Code 98778</p>
		<p>Bracket - Mounting bracket L=19mm, H=8mm, D=9mm. Material:Iron, colour:zinc, processing:Washing.</p>		<p>Code 98944</p>
		<p>Diffuser</p>		<p>Code 98941</p>
		<p>Diffuser</p>		<p>Code 98942</p>
		<p>Diffuser - Opaline Diffuser</p>		<p>Code 98943</p>
		<p>Diffuser Material:PC, colour:black.</p>	<p>Finish </p>	<p>Code 83132</p>