




Modular
C-K100017

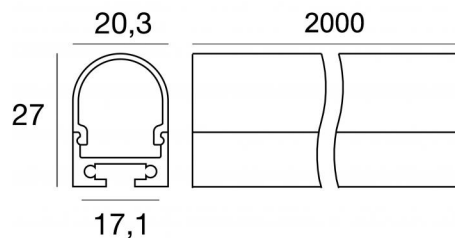

Technical data	
Type	Profiles
Installation position	Wall lights - Ceiling
Installation environment	Indoor
Glow wire test	No
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Dimmable article	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	No
Resin potting	No
Modularity	Modular


Finishing casing	
Material	Aluminium
Colour	Anodised Aluminum
Processing	Anodisation



Modular
C-K100017


Components

		<p>Dropper RGB 60 LEDs/m - LED Strip topLED 72 W DC 24 V 14.4 W/m</p>	<p>Code <u>98025</u></p>
		<p>Ribbon Basic 60 LEDs/m - LED Strip topLED 24 W DC 24 V 4.8 W/m 570.2 Lm/m</p>	<p>Code <u>98012</u></p>
		<p>Ribbon Basic 60 LEDs/m - LED Strip topLED 24 W DC 24 V 4.8 W/m 540 Lm/m</p>	<p>Code <u>98011</u></p>
		<p>Ribbon 120 LEDs/m - LED Strip topLED 60 W DC 24 V 12 W/m 1367.8 Lm/m</p>	<p>Code <u>98077</u></p>
		<p>Ribbon 120 LEDs/m - LED Strip topLED 60 W DC 24 V 12 W/m 1236 Lm/m</p>	<p>Code <u>98078</u></p>
		<p>Ribbon RGB 60 LEDs/m - LED Strip topLED 72 W DC 24 V 14.4 W/m</p>	<p>Code <u>98017</u></p>
		<p>Ribbon 240 LEDs/m</p>	<p>Code <u>98083</u></p>
		<p>Ribbon 240 LEDs/m - LED Strip topLED 96 W DC 24 V 19.2 W/m 1537.8 Lm/m</p>	<p>Code <u>98084</u></p>




Bag / Fixing kit - aluminium profile + pc opal profile cover + plastic cap kit 2 pcs. white + kit 5 metal brackets + 5 screws

Code
84452




Bracket
 L=9mm, H=8.8mm, D=21.8mm.
 Material:Iron, colour:translucent, processing:Washing.

Code
98931



Closing cap
 Material:PC, colour:black.

Code
83139




Closing cap
 Material:PC, colour:black.

Code
83184



Diffuser
 Material:PC, colour:black.

Finish	Code
Black	83138



Diffuser
 Material:PC, colour:black.

Finish	Code
Black	83183