


# Blum Projector



Bollard & Pole | 198-264 V  
3 arrayLED 12.2 W DC - 14.2 W AC | CRI 80  
**C00005BNWSP**

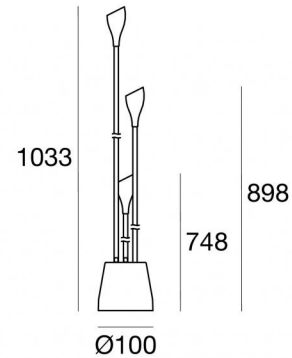

Technical data	
Type	Bollard
Installation position	Floor
Installation environment	Outdoor
Light Source	LED
Circuit structure	arrayLED
Optics	Spot
Light emission direction	frontal
Nominal power	12.2 W DC
Total Power	14.2 W
Source lumens	1848 lm
Nominal input voltage	220 - 240 V AC
Input voltage range	198 - 264 V AC
Frequency	50 - 60 Hz
CCT / Tone	3000 K
Colour rendering index	80 Ra
C.C. / C.V.	AC
Safety class	2
IP	IP65
IK	IK08
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	Driver
Dimmable article	No
Directional	Swivelling by means of flexible tube
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	1 m
Resin potting	No
Type of light emission	Single emission
Net weight	0.043 Kg
Electrostatic discharge protection	Yes
Surge protection	1 KV

## Finishing casing

Colour	brown
--------	-------

## Finishing diffuser

Material	UV Resistant Polymethylmethacrylate
Colour	opaline
Processing	Sandblasting

## Finishing base

Material	ABS Plastic
Colour	brown
Processing	Coating

# Blum Projector



Bollard & Pole | 198-264 V | 3 arrayLED 12.2 W DC - 14.2 W AC | CRI 80  
**C00005BNWSP**

## Energy efficiency class

This product contains 3 light sources of energy efficiency class E.

## Illuminotechnical Features

Source lumens	1848 lm
Colour temperature	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	80 Ra
Standard Operating Ambient Temperature	-25 / +50°C

## LED Life / Failure Ratio

L70 B10 C0 134020h (at Tj 65 Ta 25 )

Single emission bollard & pole for outdoor application. The warm white LED light source with a spot light distribution is composed of 3 arrayed LEDs with CCT of 3000 K and a CRI 80; the source luminous flux is 1848 lm, with a 151.5 lm/W nominal luminous efficacy.

The device body and features a brown finish; the diffuser is made of uv resistant polymethylmethacrylate with a sandblasting treatment. The ingress protection degree is IP65; the total weight is of 0.043 kg.


The total absorbed power is 14.2 W. The power supply cable is included and features a 1 m length.

The device features protection class II and can be floor-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.



Blum Projector | Bollard & Pole | Accessories  
**C00005BNWSP**



Picket  
installation position: land,Cover material: pc

**Code**  
14931