


Downlights | 1 arrayLED 6.3 W DC 700 mA | CRI 90
C00059AUNSP



Ø34

Technical data	
Type	Semi-recessed
Installation position	Ceiling
Installation environment	Indoor
Light Source	LED
Circuit structure	arrayLED
Optics	Spot
Light emission direction	downward
Nominal power	6.3 W DC
Source lumens	805 lm
Input voltage range	700mA
CCT / Tone	4000 K
Colour rendering index	90 Ra
C.C. / C.V.	CC
Safety class	3
IP	IP44
Optical compartment IP	IP65
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	No
Dimmable article	DALI - 1-10V
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	0.1 m
Resin potting	No
Type of light emission	Single emission
Net weight	0.11 Kg
Electrostatic discharge protection	No
Surge protection	No
Optics technology	Honey comb

Finishing casing

Material	Aluminium 6026
Colour	gold
Processing	Powder coating

Finishing diffuser

Material	UV Resistant Polycarbonate
Colour	transparent

Finishing radiator

Material	Die-cast Aluminium
Colour	Aluminium
Processing	Tumbling

Electronics

	99147 On/Off Driver 198-264V AC
	99735 Multi Power 198-264V AC / 180-275V DC
	99733 1-10V Multi Power 198-264V AC / 180-275V DC
	83323 Push and Simply Dim - DALI-2 Controller
	C-E100016 Push and Simply Dim - DALI-2 Controller

Downlights | 1 arrayLED 6.3 W DC 700 mA | CRI 90 | Base C00059AUNSP


Single emission recessed downlights for indoor application. The natural white LED light source with a spot light distribution is composed of 1 arrayed LEDs with CCT of 4000 K and a CRI 90; the source luminous flux is 805 lm, with a 127.8 lm/W nominal luminous efficacy.

The device body is made of aluminium 6026 and features a gold finish, processed by means of powder coating; the diffuser is made of uv resistant polycarbonate. The ingress protection degree is IP44; the total weight is of 0.11 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 6.3 W. The power supply cable is included and features a 0.1 m length.

The device features protection class III and can be ceiling-mounted with an outer casing, code C-C100006(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

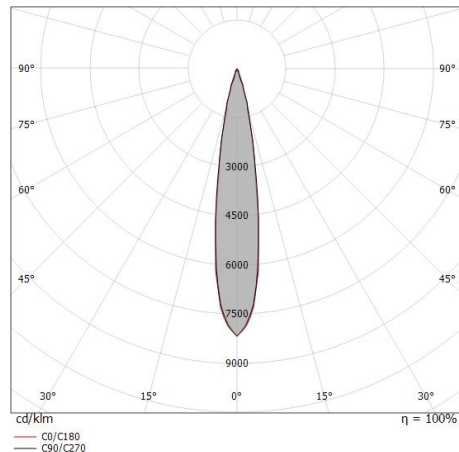

Distance [m]	Cone diameter [m]	illuminance [lx]
0.5	0.15 0.15	E(0°) 11897 E(C90) 8.8° 5810 E(C0) 8.7° 5841
1.0	0.31 0.31	E(0°) 2974 E(C90) 8.8° 1452 E(C0) 8.7° 1460
1.5	0.46 0.46	E(0°) 1322 E(C90) 8.8° 846 E(C0) 8.7° 649
2.0	0.62 0.61	E(0°) 744 E(C90) 8.8° 363 E(C0) 8.7° 365
2.5	0.77 0.77	E(0°) 476 E(C90) 8.8° 232 E(C0) 8.7° 234
3.0	0.93 0.92	E(0°) 330 E(C90) 8.8° 161 E(C0) 8.7° 162

— C0/C180 (Half-peak divergence: 17.4°)
— C90/C270 (Half-peak divergence: 17.6°)

Energy efficiency class

This product contains a light source of energy efficiency class F.

Illuminotechnical Features

Light Output Ratio (LOR)	45 %
Source lumens	805 lm
Delivered lumens	364 lm
Consumption	6.5 W
Luminaire efficacy	56 lm/W
Colour temperature	4000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	90 Ra
Standard Operating Ambient Temperature	-20 / +50°C

LED Life / Failure Ratio


L70 B10 C0 134020h (at Tj 65 Ta 25)

UGR

UGR axial	10.1
UGR transversal	9.4
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL

C0/C180 optics	17°
Light distribution symmetry	Symmetrical




Outer casing - outer casing

installation position: ceiling; type of installation: drywall L=48mm, H=28mm, D=48mm.

Material:Aluminium, colour:White RAL 9003, processing:Coating.

Finish	Code
White	98530




Outer casing - outer casing

installation position: ceiling, floor; type of installation: drywall L=48mm, H=28mm, D=48mm.

Material:Aluminium, colour:Black, processing:Coating.

Finish	Code
Black	98531




Outer casing - outer casing

installation position: ceiling; type of installation: drywall L=42mm, H=28mm, D=42mm.

Material:Aluminium, colour:gold, processing:Coating.

Finish	Code
Gold	98532



Outer casing - Frameless outer-casing

installation position: ceiling; type of installation: drywall L=45mm, H=28mm, D=45mm.

Material:PC, colour:transparent.

Finish	Code
Transp.	C-C100006