


Rubber 3D Dynamic White



LED Strip | 112 topLED 16 W DC 24 V | 16 W/m
0 Lm/m | CRI >90 | Dynamic White



C0014DDI01004

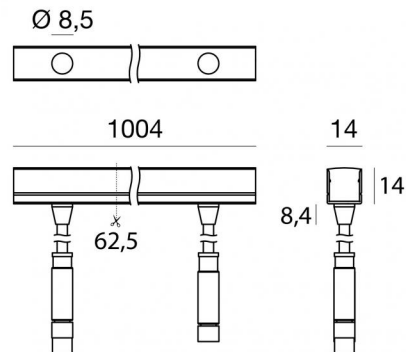

Technical data	
Length	1000 mm
Minimum cut	62.5 mm
Type	LED Strip
Installation position	Wall lights - Ceiling
Installation environment	Outdoor
Light Source	LED
Circuit structure	topLED
Optics	Diffused
Light emission direction	downward
Nominal power	16 W DC
Power / m	16 W / m
Input voltage range	24V
Source lumens 2000K	375 lm
Minimum color temperature	2000 K
Source lumens 6000K	450 lm
Maximum color temperature	6000 K
CCT / Tone	Dynamic White
Colour rendering index	>90 Ra
C.C. / C.V.	CV
Safety class	3
IP	IP67
IK	IK07
Glow wire test	650°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
ETL	Yes
Driver included	No
Dimmable article	DALI - 1-10V
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	1(M)x0.25 m + 1(F)x0.25 m
Resin potting	Yes
Type of light emission	Single emission
Length	1000 mm
Net weight	0.103 Kg
Electrostatic discharge protection	No


Finishing casing


Material	Technopolymer
Colour	white


Finishing diffuser

Material	PU
Colour	Opal

Electronics

 99331
On/Off Driver 198-264V AC / 176-275V DC 150 W (1 - 9 art.)

 99332
1-10V Controller (1 - 9 art.)

 C-E700005
DMX-RDM Multi Channel 10.8-26.4V DC W (- art.)

Rubber 3D Dynamic White



LED Strip | 112 topLED 16 W DC 24 V | 16 W/m | 0 Lm/m | CRI >90 | Dynamic White | +
MIN
C0014DDI01004

Single emission led strip for outdoor application. The dynamic white LED light source with a diffused light distribution is composed of 112 topLED LEDs with CCT of From 2000 to 6000 K and a CRI >90.

The device body is made of technopolymer and features a white finish; the diffuser is made of pu. The ingress protection degree is IP67; the total weight is of 0.103 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 16 W. The power supply cable is included and features a 1(M)x0.25 m + 1(F)x0.25 m length.

The device features protection class III and can be wall lights or ceiling-mounted with an outer casing, code 82199(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

Energy efficiency class

This product contains a light source of energy efficiency class F.

Illuminotecnical Features

Delivered lumens	371 lm
Consumption	8 W
Luminaire efficacy	46 lm/W
Standard Deviation of Colour Matching	3 Step MacAdam
Standard Operating Ambient Temperature	-20 / +55°C

LED Life / Failure Ratio

L90 B10 C0 54000h

Rubber 3D Dynamic White



LED Strip | 112 topLED 16 W DC 24 V | 16 W/m | 0 Lm/m | CRI >90 | Dynamic White | +

MAX

C0014DDI01004

Single emission led strip for outdoor application. The dynamic white LED light source with a diffused light distribution is composed of 112 topped LEDs with CCT of From 2000 to 6000 K and a CRI >90.

The device body is made of technopolymer and features a white finish; the diffuser is made of pu. The ingress protection degree is IP67; the total weight is of 0.103 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 16 W. The power supply cable is included and features a 1(M)x0.25 m + 1(F)x0.25 m length.

The device features protection class III and can be wall lights or ceiling-mounted with an outer casing, code 82199(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

Energy efficiency class

This product contains a light source of energy efficiency class F.

Illuminotechnical Features

Delivered lumens	453 lm
Consumption	8 W
Luminaire efficacy	56 lm/W
Standard Deviation of Colour Matching	3 Step MacAdam
Standard Operating Ambient Temperature	-20 / +55°C


LED Life / Failure Ratio

L90 B10 C0 54000h

Rubber 3D Dynamic White




Rubber 3D Dynamic White | LED Strip | Accessories
C0014DDI01004




Outer casing - Linear profile in aluminum 19x18x1000mm for Rubber 3D, Rubber 3D Concrete, Rubber 3D 48V, Rubber 3D Optic, Rubber 3d Pixel
 installation position: wall lights, ceiling L=1000mm, H=18mm, D=19mm.
 Material:Aluminium, colour:Aluminium, processing:Anodisation.

Finish	Code
	99549

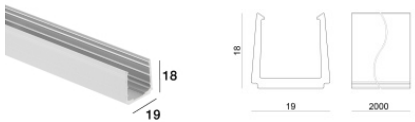


Outer casing - Linear profile in aluminum 19x18x2000mm for Rubber 3D, Rubber 3D Concrete, Rubber 3D 48V, Rubber 3D Optic, Rubber 3D Pixel
 installation position: wall lights, ceiling L=2000mm, H=18mm, D=19mm.
 Material:Aluminium, colour:Aluminium, processing:Anodisation.

Finish	Code
	82198




Profile - Black aluminium 18x19 profile 1m for Rubber 3D, Rubber 3D Concrete, Rubber 3D 48V, Rubber 3D Optic, Rubber 3D Pixel
 Material:Aluminium, colour:black, processing:Anodisation.

Code
C-K100007




Profile - Black aluminium 18x19 profile 1m for Rubber 3D, Rubber 3D Concrete, Rubber 3D 48V, Rubber 3D Optic, Rubber 3D Pixel
 Material:Aluminium, colour:black, processing:Anodisation.

Code
C-K100008




Bracket - Clip with toothed spring - Anodised Aluminium - for Rubber 3D (not for Rubber 3D PROtection)
 installation position: wall lights, ceiling L=50mm, H=23mm, D=21mm.
 Material:Aluminium, colour:Aluminium, processing:Anodisation.

Finish	Code
	C-F400001




Bracket - Clip with toothed spring - Anodised Black Aluminium - for Rubber 3D (not for Rubber 3D PROtection)
 installation position: wall lights, ceiling L=50mm, H=23mm, D=21mm.
 Material:Aluminium, colour:black, processing:Anodisation.

Finish	Code
	C-F400002

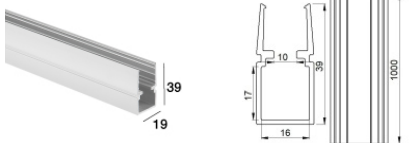

Outer casing - Linear profile with aluminium cable passage 39x18x1000mm for Rubber 3D, Rubber 3D Concrete, Rubber 3D 48V, Rubber 3D Optic, Rubber 3D Pixel
 installation position: wall lights, ceiling L=2000mm, H=39mm, D=19mm.
 Material:Aluminium, colour:Aluminium, processing:Anodisation.

Finish	Code
	83034

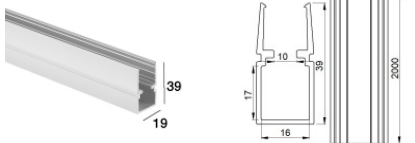

Outer casing - Linear profile with aluminum cable passage 39x18x2000mm for Rubber 3D, Rubber 3D Concrete, Rubber 3D 48V, Rubber 3D Optic, Rubber 3D Pixel
 installation position: wall lights, ceiling L=1000mm, H=39mm, D=19mm.
 Material:Aluminium, colour:Aluminium, processing:Anodisation.

Finish	Code
	82199

Rubber 3D Dynamic White




Rubber 3D Dynamic White | LED Strip | Accessories
C0014DDI01004

		<p>Profile - Profile 39x19 Aluminum black 1m for Rubber 3D, Rubber 3D Concrete, Rubber 3D 48V, Rubber 3D Optic, Rubber 3D Pixel Material:Aluminium, colour:black, processing:Anodisation.</p>	<p>Code C-K100009</p>
		<p>Profile - Profile 39x19 Aluminium black 2m for Rubber 3D, Rubber 3D Concrete, Rubber 3D 48V, Rubber 3D Optic, Rubber 3D Pixel Material:Aluminium, colour:black, processing:Anodisation.</p>	<p>Code C-K100010</p>
		<p>Bracket - Clip with toothed spring with cable passage - Anodised Aluminium - for Rubber 3D (not for Rubber 3D PROtection) installation position: wall lights, ceiling L=50mm, H=41mm, D=21mm. Material:Aluminium, colour:Aluminium, processing:Anodisation.</p>	<p>Finish [Redacted] Code C-F400003</p>
		<p>Bracket - Clip with toothed spring with cable passage - Anodised Black Aluminium - for Rubber 3D (not for Rubber 3D PROtection) installation position: wall lights, ceiling L=50mm, H=41mm, D=21mm. Material:Aluminium, colour:black, processing:Anodisation.</p>	<p>Finish [Redacted] Code C-F400004</p>
		<p>Profile - Flexible profile Material:AISI 304 steel, colour:steel.</p>	<p>Code C-K100011</p>
		<p>Anti-glare - Anti-glare herringbone eyelid Anti-glare Type: eyelid. Material:Aluminium 6060, colour:Anodised Aluminum, processing:20 µm anodizing.</p>	<p>Finish [Redacted] Code C-K100032</p>
		<p>Bag / Fixing kit - TILTING KIT + BRACKET D68X20 - Transparent - for Rubber 3D (not Rubber 3D PROtection)</p>	<p>Code 83352</p>
		<p>Bag / Fixing kit - Wall-mounted tilting kit in AISI 304 steel</p>	<p>Code C-K400168</p>

Rubber 3D Dynamic White



Rubber 3D Dynamic White | LED Strip | Accessories
C0014DDI01004




Bag / Fixing kit - Wall-mounted tilting kit in AISI 304 steel

Code
C-K400169



Bag / Fixing kit - RUBBER PEG + BRACKET RUBBER PEG + BRACKET PEG + BRACKET D114X204 for Rubber 3D, Rubber 3D Concrete, Rubber 3D 48V, Rubber 3D Optic, Rubber 3D Pixel

Code
83351



Bag / Fixing kit - Picket with tilting bracket

Code
C-F500004




Bag / Fixing kit - Picket with tilting bracket

Code
C-F500005




Closing cap - PU Rubber
 Material:Silicone, colour:transparent.

Code
99539




Template

Code
C-V200005



Profile
 Material:UV Resistant Polycarbonate, colour:transparent.

Code
C-K100021



Profile
 Material:UV Resistant Polycarbonate, colour:transparent.









Code
C-K100022

Rubber 3D Dynamic White



Rubber 3D Dynamic White | LED Strip | Accessories


C0014DDI01004

	<p>Electronic accessory installation position: ceiling L=218mm, H=42mm, D=31mm. Material:ABS Plastic, colour:white.</p>	<p>Code <u>C-E300007</u></p>
	<p>Electronic accessory installation position: ceiling L=218mm, H=42mm, D=31mm. Material:ABS Plastic, colour:black.</p>	<p>Code <u>C-E300008</u></p>
	<p>Strip Service - Double sided tape 33 meters</p>	<p>Code <u>99520</u></p>
	<p>Connector</p>	<p>Code <u>89548</u></p>
	<p>Cable gland</p>	<p>Code <u>C-W300001</u></p>
	<p>Cable and connector - Cable for Rubber 3D Dynamic Length 2000 mm; insulation double; section 0.5 mm²; colors: white - black - grey.</p>	<p>Code <u>C-W200003</u></p>
	<p>Cable and connector - Cable for Rubber 3D Dynamic Length 2000 mm; insulation double; section 0.5 mm²; colors: white - black - grey.</p>	<p>Code <u>C-W200004</u></p>
	<p>Cable and connector - Cable for Rubber 3D Dynamic Length 5000 mm; insulation double; section 0.5 mm²; colors: white - black - grey.</p>	<p>Code <u>C-W200009</u></p>

Rubber 3D Dynamic White




Rubber 3D Dynamic White | LED Strip | Accessories
C0014DDI01004



RF remote control

Code

C-W600001



Dimmer - RF Remote Control - 12-48V 4CH WIFI-PUSH-TEL for Ribbon Plus, Ribbon PRO, Ribbon PRO 48V, PU_C, Rubber 2D Mini, Rubber 3D, Rubber 3D PROtection, Rubber 3D Concrete, Rubber 3D 48V, Rubber 3D OPTIC
RF Remote controller

Code

C-E700002