




Downlights | 1 x powerLED 1 W DC 350 mA | CRI 90
C00275CHMXF



29

Technical data	
Type	Encasement with flange
Installation position	Wall lights - Ceiling
Installation environment	Indoor
Light Source	LED
Circuit structure	powerLED
Optics	Extra Wide Flood
Light emission direction	downward
Nominal power	1 W DC
Source lumens	124 lm
Input voltage range	350mA
CCT / Tone	2700 K
Colour rendering index	90 Ra
C.C. / C.V.	CC
Safety class	3
IP	IP44
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	No
Dimmable article	DALI - 1-10V
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	0.12 m
Resin potting	Yes
Type of light emission	Single emission
Net weight	0.06 Kg
Electrostatic discharge protection	No
Surge protection	No

Finishing casing

Material	Brass
Colour	chrome
Processing	Electroplating

Electronics

	89144 On/Off Driver 198~264V AC / 180~275V DC (1 - 2 art.)
	89145 On/Off Driver 198~264V AC / 180~275V DC (3 - 6 art.)
	99375 On/Off Driver 198~264V AC (8 - 12 art.)
	C-E100010 1-10V - 0-10V Controller (3 - 4 art.)
	C-E100011 Push and Simply Dim - DALI-2 Controller (3 - 4 art.)

Downlights | 1 x powerLED 1 W DC 350 mA | CRI 90 | Base C00275CHMXF


Single emission recessed downlights for indoor application. The super warm white LED light source with a extra wide flood light distribution is composed of 1 powerled LEDs with CCT of 2700 K and a CRI 90; the source luminous flux is 124 lm, with a 124.0 lm/W nominal luminous efficacy.

The device body is made of brass and features a chrome finish, processed by means of electroplating. The ingress protection degree is IP44; the total weight is of 0.06 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 1 W. The power supply cable is included and features a 0.12 m length.

The device features protection class III and can be wall lights or ceiling-mounted, with a 29 mm diameter hole (in plasterboard) with an outer casing, code 84915(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

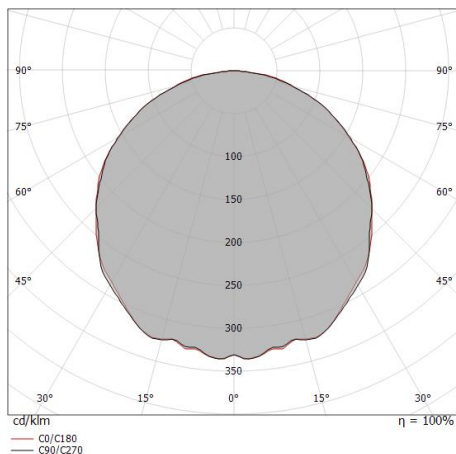

Distance [m]	Cone diameter [m]	illuminance [lx]
0.5	1.59 1.58	E(0°) 84 E(C90) 57.8° 6 E(C0) 57.7° 7
1.0	3.18 3.16	E(0°) 21 E(C90) 57.8° 2 E(C0) 57.7° 2
1.5	4.76 4.75	E(0°) 9 E(C90) 57.8° 1 E(C0) 57.7° 1
2.0	6.35 6.33	E(0°) 5 E(C90) 57.8° 0 E(C0) 57.7° 0
2.5	7.94 7.91	E(0°) 3 E(C90) 57.8° 0 E(C0) 57.7° 0
3.0	9.53 9.49	E(0°) 2 E(C90) 57.8° 0 E(C0) 57.7° 0

— C0/C180 (Half-peak divergence: 115.4°)
— C90/C270 (Half-peak divergence: 115.6°)

Energy efficiency class

This product contains a light source of energy efficiency class F.

Illuminotechnical Features

Light Output Ratio (LOR)	51 %
Source lumens	124 lm
Delivered lumens	64 lm
Consumption	1,0 W
Luminaire efficacy	64 lm/W
Colour temperature	2700 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	90 Ra
Standard Operating Ambient Temperature	-20 / +50°C
Ordinary temperature on the glass	40°C

LED Life / Failure Ratio

L70 B20 C0 214455h (at Tj 60 Ta 25)

UGR

UGR axial	32.3
UGR transversal	32.3
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL

C0/C180 optics	115°
Light distribution simmetry	Symmetrical



Nitum_Q | Downlights | Accessories
C00275CHMXF



Outer casing

installation position: ceiling; type of installation: masonry L=42mm, H=35mm, D=35mm.

Material:ABS Plastic, colour:black.

Code

84336



Outer casing

installation position: wall lights; type of installation: masonry L=49mm, H=60mm, D=60mm.

Material:ABS Plastic, colour:black.

Code

84915