




LED Strip | 700 topLED 96 W DC 24 V | 19.2 W/m
2222 Lm/m | CRI >90
C0039MDI05000

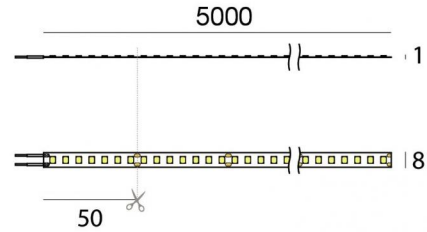

Technical data	
Length	5000 mm
Minimum cut	50 mm
Installation position	Wall lights - Ceiling
Installation environment	Indoor
Light Source	LED
Circuit structure	topLED
Optics	Diffused
Light emission direction	downward
Nominal power	96 W DC
Source lumens	11110 lm
Input voltage range	24V
CCT / Tone	2700 K
Colour rendering index	>90 Ra
C.C. / C.V.	CV
Safety class	3
IP	IP20
Glow wire test	650°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	No
Dimmable article	DALI - 1-10V
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	2x 0.3 m
Resin potting	No
Type of light emission	Single emission
Length	5000 mm
Net weight	0.09 Kg
Electrostatic discharge protection	No
Surge protection	No

Finishing casing

Colour	white
--------	-------

Electronics

	99331 On/Off Driver 198~264V AC / 176~275V DC 150 W (1 art.)
	99332 1-10V Controller (1 art.)
	99374 On/Off Driver 198~264V AC / 176~275V DC 75 W (1 art.)
	83333 Push and Simply Dim - DALI-2 Controller (1 art.)
	C-E400002 Push and Simply Dim - DALI-2 Controller (1 - 2 art.)

Cables Electrification

Max cable length	300 mm
------------------	--------



LED Strip | 700 topLED 96 W DC 24 V | 19.2 W/m | 2222 Lm/m | CRI >90
C0039MDI05000

Single emission led strip for indoor application. The super warm white LED light source with a diffused light distribution is composed of 700 topped LEDs with CCT of 2700 K and a CRI >90; the source luminous flux is 11110 lm, with a 115.7 lm/W nominal luminous efficacy.

The device body and features a white finish. The ingress protection degree is IP20; the total weight is of 0.09 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 96 W. The power supply cable is included and features a 2x 0.3 m length.

The device features protection class III and can be wall lights or ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Energy efficiency class

This product contains a light source of energy efficiency class F.



Illuminotechnical Features

Source lumens	11110 lm
Colour temperature	2700 K
Standard Deviation of Colour Matching	3 Step MacAdam
Standard Operating Ambient Temperature	-20 / +45°C

Ribbon Plus



LED Strip | 700 topLED 96 W DC 24 V | 19.2 W/m | 2222 Lm/m | CRI >90
C0039MDI05000

Components

		LUNO_20/27 - Profili Modular	Code <u>C-K100017</u>
		LUNO_20/27 - Profili Modular	Code <u>C-K100018</u>
		Rive_17/16 - Profili Modular	Code <u>C-K100015</u>
		Rive_17/16 - Profili Modular	Code <u>C-K100016</u>
		Cela_18/18 - Profili Modular	Code <u>C-K100019</u>
		Cela_18/18 - Profili Modular	Code <u>C-K100020</u>
		Tabulo_35/14 - Profili Modular	Code <u>C-K100025</u>
		Rive_17/16	Code <u>C-K100026 - C-K100027</u>



LED Strip | 700 topLED 96 W DC 24 V | 19.2 W/m | 2222 Lm/m | CRI >90
C0039MDI05000

Components



















Cela_18/18

Code

C-K100028 - C-K100029



		Diffuser		Code 98941
		Diffuser		Code 98942
		Diffuser - Opaline Diffuser		Code 98943
		Diffuser Material:PC, colour:black.	Finish Black	Code 83132
		Optics Light distribution: medium flood,Cover material: pc		Code C-U100001
		Diffuser Material:PC, colour:opaline.	Finish Opaline	Code C-K200005
		Diffuser Material:PC, colour:opaline.	Finish Opaline	Code C-K200007
		Closing cap - Closing cap Material:PC, colour:white.		Code 98892



		<p>Closing cap Material:PC, colour:black.</p>	<p>Code <u>83133</u></p>
		<p>Closing cap Material:plastic, colour:grey.</p>	<p>Code <u>C-V400023</u></p>
		<p>Closing cap Material:plastic, colour:grey.</p>	<p>Code <u>C-V400027</u></p>
		<p>Closing cap Material:plastic, colour:grey.</p>	<p>Code <u>C-V400029</u></p>
		<p>Bracket - Mounting bracket L=19mm, H=8mm, D=9mm. Material:Iron, colour:zinc, processing:Washing.</p>	<p>Code <u>98944</u></p>
		<p>Diffuser</p>	<p>Code <u>98925</u></p>
		<p>Closing cap</p>	<p>Code <u>98928</u></p>
		<p>Diffuser Material:PC, colour:opaline.</p>	<p>Finish Opaline Code <u>C-K200001</u></p>




Ribbon Plus | LED Strip | Accessories
C0039MDI05000



Diffuser
 Material:PC, colour:black.

Finish
 Black **Code**
 C-K200002



Bracket
 L=9mm, H=8.8mm, D=21.8mm.
 Material:Iron, colour:translucent, processing:Washing.

Code
 98931




Diffuser
 Material:PC, colour:opaline.

Finish
 Opaline **Code**
 C-K200003




Diffuser
 Material:PC, colour:black.

Finish
 Black **Code**
 C-K200004




Closing cap
 Material:plastic, colour:grey.

Code
 C-V400035





Closing cap
 Material:ABS Plastic, colour:black.

Code
 C-V400036



Closing cap
 Material:plastic, colour:grey.

Code
 C-V400025



Closing cap
 Material:plastic, colour:grey.

Code
 C-V400031



Ribbon Plus | LED Strip | Accessories
C0039MDI05000

		<p>Closing cap Material:plastic, colour:grey.</p>	<p>Code <u>C-V400033</u></p>
		<p>Bag / Fixing kit</p>	<p>Code <u>C-K100027</u></p>
		<p>Closing cap</p>	<p>Code <u>98896</u></p>
		<p>Diffuser</p>	<p>Code <u>98898</u></p>
		<p>Diffuser</p>	<p>Code <u>98899</u></p>
		<p>Diffuser</p>	<p>Code <u>98900</u></p>
		<p>Closing cap</p>	<p>Code <u>98902</u></p>
		<p>Bracket L=12mm, H=15mm, D=30mm. Material:PC, colour:white.</p>	<p>Finish Code White <u>98901</u></p>

Ribbon Plus



Ribbon Plus | LED Strip | Accessories

C0039MDI05000

		<p>Closing cap Material:Aluminium, colour:translucent.</p>	<p>Code <u>98907</u></p>
		<p>Diffuser</p>	<p>Code <u>98917</u></p>
		<p>Closing cap Material:PC, colour:white.</p>	<p>Code <u>98918</u></p>
		<p>Profile - Wall integrated side profile Material:Aluminium 6060, colour:Anodised Aluminum, processing:20 µm anodizing.</p>	<p>Code <u>98921</u></p>
		<p>Closing cap Material:PC, colour:white.</p>	<p>Code <u>98922</u></p>
		<p>Diffuser Material:PC, colour:black.</p>	<p>Finish Black Code <u>C-K200009</u></p>
		<p>Closing cap Material:plastic, colour:grey.</p>	<p>Code <u>C-V400041</u></p>
		<p>Diffuser Diffuser Type: opaline diffuser. Material:PC, colour:opaline.</p>	<p>Finish Opaline Code <u>98395</u></p>



		<p>Closing cap</p>	<p>Code <u>98418</u></p>
		<p>Springs for recessing - 5 pieces</p>	<p>Code <u>98420</u></p>
		<p>Closing cap Material:plastic, colour:grey.</p>	<p>Code <u>C-V400037</u></p>
		<p>Closing cap Material:ABS Plastic, colour:black.</p>	<p>Code <u>C-V400038</u></p>
		<p>Bracket L=22mm, H=21.5mm, D=16.4mm. Material:PC, colour:transparent.</p>	<p>Finish Code <u>Transp.</u> <u>98904</u></p>
		<p>Bag / Fixing kit</p>	<p>Code <u>C-K100028</u></p>
		<p>Bag / Fixing kit</p>	<p>Code <u>C-K100029</u></p>
		<p>Connector - Fast connector for Ribbon Basic V2 8mm, Ribbon HD 8mm (not Ribbon COB) Length 21,6 mm.</p>	<p>Code <u>83396</u></p>




Ribbon Plus | LED Strip | Accessories
C0039MDI05000




Connector - Fast connector for Ribbon Basic V2 8mm, Ribbon HD 8mm (not Ribbon COB)
 Length 15,4 mm.

Code
83397




Closing cap
 Material:plastic, colour:grey.

Code
C-V400019



Closing cap
 Material:ABS Plastic, colour:black.

Code
C-V400020



Closing cap
 Material:plastic, colour:grey.

Code
C-V400021



Closing cap
 Material:ABS Plastic, colour:black.

Code
C-V400022